

1700 UNI-LOADER

TABLE OF CONTENTS

SERIES/SECTION	FROM NO.	SECTION NO.
10 SERIES - GENERAL		
General Engine Specifications	9-74216	11
Detailed Specifications	9-80732	1020
Maintenance and Lubrication	9-72095	13
20 SERIES - ENGINE		
Engine Removal and Installation	9-72095	21
Air Cleaner	9-72095	24
Cylinder Head and Valves, Diesel	9-80512	2013
Cylinder Head and Valves, Spark Ignition	9-80473	2014
Engine Block Assemblies - Gasoline Engines	9-76995	2023
Engine Block Assemblies - Diesel Engine	9-77005	2024
30 SERIES - FUEL SYSTEM		
Carburetor	9-80581	35
Fuel System & Filters - Diesel Engines	9-78785	3010
Roosa Master Model DB Fuel Injection Pumps	9-78795	3012
Roosa Master Fuel Injectors	9-78806	3013
Fuel Filter - Gasoline Engines	9-79065	3110
40 SERIES - HYDRAULICS		
Hydraulic System	9-72095	41
Lift and Tilt Cylinders	9-74225	45
Auxiliary Cylinders	9-74235	47
60 SERIES - POWER TRAIN		
Power Train	9-72095	61
70 SERIES - BRAKES		
Brakes (Foot and Parking)	9-72095	72
80 SERIES - ELECTRICAL		
Electrical System	9-72095	82
Ignition System	9-72095	83
Capacitor Discharge Ignition System	9-74596	83
90 SERIES - MOUNTED EQUIPMENT		
Loader	9-72095	92
ROPS	9-72095	99



SAFETY PRECAUTIONS




- 1. Never place any part of your body between the chassis and the loader frame and/or lift and tilt cylinders if service being performed prohibits the use of a safety stop.**
- 2. Whenever the bucket must be raised to aid in servicing, block the bucket in position with lift cylinder stops or a suitable safety stand.**
- 3. Operate controls from the operator's seat only.**
- 4. When working in the area of the jackshaft or drive belt with the engine running, avoid wearing loose clothing if possible and use extreme caution.**
- 5. When working at the rear with the engine running, use care not to be caught in the fan blades or drive belts.**
- 6. Keep hands and fingers clear of drive chains if running with drive compartment cover removed.**

Section 11

GENERAL ENGINE SPECIFICATIONS 1740 UNI-LOADER

THE MODEL AND ENGINE SERIAL NUMBER IS STAMPED ON A PLATE LOCATED ON THE SIDE OF THE ENGINE ABOVE THE CRANKING MOTOR.

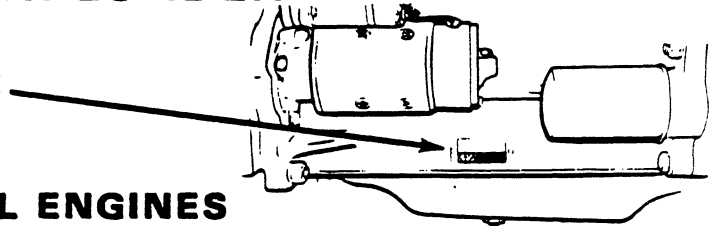

DIESEL ENGINES

General

Type	Case Open Chamber, 4 Cylinder, 4 Stroke Cycle, Valve-in-Head
Firing Order	1-3-4-2
Bore	3-13/16 Inches
Stroke	4-1/8 Inches
Piston Displacement	188 Cubic Inches
Compression Ratio	17.5 to 1
No Load Governed Speed	2150 RPM
Rated Engine Speed	2000 RPM
Engine Idling Speed	950 to 1000 RPM
*Valve Tappet Clearance (Exhaust)	(Hot and Cold) .014 Inch
(Intake)	(Hot and Cold) .014 Inch

*Hot Settings Are Made After the Engine Has Operated At Thermostat Controlled Temperature For At Least Fifteen Minutes.

Piston and Connecting Rods

Rings per Piston	3
Number of Compression Rings	2
Number of Oil Rings	1
Type Pins	Full Floating Type
Type Bearing	Replaceable Precision, Steel Back, Copper-Lead Alloy Liners

Main Bearings

Number of Bearings	5
Type Bearings	Replaceable Precision Steel Back, Copper-Lead Alloy Liners

Engine Lubricating System

Crankcase Capacity	4 Quarts
With Filter Change	5 Quarts
Oil Pressure	50 to 70 Pounds with Engine Warm and Operating at Rated Engine Speed
Type System	Pressure and Spray Circulation
Oil Pump	Gear Type
Oil Filter	Full Flow Spin on Type

Fuel System

Fuel Injection Pump	Roosa-Master
Pump Timing	2 Degrees Before Top Dead Center
Fuel Injectors (Prior to Eng. SN 2734508)	Pencil Type (Opening Pressure 2800 PSI)
Fuel Injectors (Starting with Engine SN 2734509)	Pencil Type (Opening Pressure 3200 PSI)
Fuel Transfer Pump	Vane Type, Integral Part of Injection Pump
Governor	Variable Speed, Fly-Weight Centrifugal Type, Integral Part of Injection Pump
1st Stage Fuel Filter (Prior to Eng. SN 2718490)	Replaceable Element Type
2nd Stage Fuel Filter (Prior to Eng. SN 2718490)	Replaceable Element Type
1st Stage Fuel Filter (Starting with Eng. SN 2718490)	Spin on Type
2nd Stage Fuel Filter (Starting with Eng. SN 2718490)	Spin on Type

GENERAL ENGINE SPECIFICATION

1737 UNI-LOADER

SPARK IGNITION ENGINES

General

Type	4 Cylinder, 4 Stroke Cycle, Valve-in-Head
Firing Order	1-3-4-2
Bore	3-3/8 Inches
Stroke	4-1/8 Inches
Compression Ratio	7.1 to 1
Piston Displacement	148 Cubic Inches
No Load Governed Speed	2150 RPM
Rated Engine Speed	2000 RPM
Engine Idling Speed	950 to 1000 RPM
*Valve Tappet Clearance (Intake)	(Hot and Cold) .014 Inches
(Exhaust)	(Hot) .014 Inches
	(Cold) .020 Inches

Exhaust Valve Rotators Positive Type

*Hot Settings Are Made After The Engine Has Operated At Thermostat Controlled Temperature For At Least Fifteen Minutes.

Piston and Connecting Rods

Rings per Piston	4
Number of Compression Rings	3
Number of Oil Rings	1
Type Pin	Full Floating Type
Type Bearings	Replaceable, Precision Steel Back, Copper Lead Alloy Liners.

Main Bearings

Number of Bearings	3
Type Bearings	Replaceable, Precision Steel Back, Copper Lead Alloy Liners

Engine Lubricating System

Crankcase Capacity	4 Quarts
With Filter Change	5 Quarts
Oil Pressure	24 to 32 Pounds with Engine Warm and Operating at Rated Engine Speed
Type System	Pressure Spray Circulation
Oil Pump	Gear Type
Oil Filter	Full Flow, Spin on Type

Fuel System

Carburetor	Marvel-Schebler TSX Series
------------------	----------------------------

Distributor Ignition

Contact Point Gap020 Inch
Dwell Angle	42°
Spark Plugs	Prestolite 18 8
Plug Gap025 Inch
Thread	18 MM
Shank Length	1.2 Inch

Engine Timing

Static Timing	6° BTDC
Running Timing	40° BTDC at Rated Engine Speed

Section 1020

DETAILED SPECIFICATIONS 480 AND 580 SERIES B TRACTORS

TABLE OF CONTENTS

ENGINE BLOCK	2
CYLINDER HEAD AND VALVES	7
COOLING SYSTEM	10
ENGINE OIL FILTER	11
AIR CLEANER	11
FUEL SYSTEM	12
BRAKES	14
POWER TRAIN	15
STEERING	16
GENERAL TORQUE TABLE	17
SPECIAL TORQUES	17

Engine Block

NOTE: All dimensions are given in inches. Specifications apply to all engines unless noted.

	Maximum Limit Including Wear
CYLINDER SLEEVES	
I.D. of sleeve (159G)	3.5013 to 3.5028005
(188D)	3.8115 to 3.8125005
(188G)	3.8130 to 3.8145005
(148G)	3.3745 to 3.3765005
Sleeve out-of-round004
Clearance to bottom of piston skirt (188D)0035 to .0055
(188G)0025 to .0055
(159G)0015 to .0045
(148G)001 to .003
Taper001
PISTON	
Type	Cam Ground
Material	Aluminum Alloy
O.D. at bottom of skirt: 90° to piston pin (188G)	3.8090 to 3.8105
(188D)	3.8070 to 3.8080
(159G)	3.4983 to 3.4998
(148G)	3.373 to 3.3750
I.D. of piston pin bore (188D)	1.2500 to 1.2503001
(188G, 159G)9992 to .9994001
(148G)8592 to .8594001
Width of 1st ring groove (188D)	Keystone Type
(188G, 159G, 148G)0965 to .0975
Width of 2nd ring groove (188D)097 to .098
(148G, 159G, 188G)0955 to .0965
Width of 3rd ring groove (188D)1885 to .1895
(188G, 159G, 148G)0955 to .0965
Width of 4th ring groove (188G, 159G, 148B)250 to .251
PISTON RINGS	
No. 1 Compression (188D)	Chrome Grooved Keystone
(188G, 159, 148G)	Chrome Tapered Face
Width (188D)	Not Measureable
(188G, 159G, 148G)0930 to .0935

Engine Block (Continued)Maximum Limit
Including Wear

PISTON RINGS (Continued)

End gap (188D)015 to .025
 (148G, 159G, 188G)010 to .020
 Side clearance (188D) Not Measureable
 (188G, 159G, 148G)0030 to .0045

No. 2 Compression (188G, 159G, 148G) Tapered Face

Width (188G, 159G, 148G)0930 to .0935
 (188D)0925 to .0935
 End gap (188D)015 to .025
 (148G, 159G, 188G)010 to .020
 Side clearance (188D)0035 to .0055
 (188G, 159G, 148G)0020 to .0035

No. 3 Compression (188G,159G,148G) Tapered Face

Width0930 to .0935
 End gap in 3.812 sleeve (188G, 159G, 148G)010 to .020
 Side clearance0020 to .0035

OIL RINGS

Width (188D)1825 to .1888
 (188G,159G,148G)2485 to .2490
 Side clearance (188D)000 to .007
 (188G,159G,148G)0010 to .0015
 End gap (188G, 159G, 148G)010 to .018
 Rail end gap (188D)015 to .055

Engine Block (Continued)

Maximum Limit
Including Wear

PISTON PIN

Type	Full Floating
O.D. of pin (188D)	1.2497 to 1.2498
(188G, 159G)9991 to .9992
(148G)8592 to .8593
Fit in piston (188D)0002 to .0006
(188G, 159G)0000 to .0003
(148G)0000 to .0002
Fit in rod bushing (188D)0002 to .0006
(188G,159G,148G)0003 to .0006

CONNECTING ROD

Bushing	Replaceable Bronze	
Bushing I.D. installed (reamed to size)		
(188G,159G)9995 to .9997	.002
(188D)	1.2502 to 1.2504	.002
(148G)8596 to .8598	.002
Bushing out-of-round0015
Bearing Liners	Replaceable	
Bearing liner width	1.120 to 1.130	
Rod width at crank end	1.3035 to 1.3055	
Journal I.D. without bearing liners	2.1870 to 2.1875	
Bearing oil clearance0010 to .0035	.006
Undersize bearings for service002,.010,.020,.030	
Side clearance005 to .011	
Cap bolts	Self locking type	

CRANKSHAFT

Type	Balanced	
Main bearing liners	Replaceable	
End play, center main bearing cap001 to .006	.012
Center main bearing thrust surface thickness1025 to .1045	
Connecting rod journal std. O.D.	2.0605 to 2.0615	
Grind to .010" O.D. undersize	2.0505 to 2.0515	
.020" O.D. undersize	2.0405 to 2.0415	
.030" O.D. undersize	2.0305 to 2.0315	

Engine Block (Continued)Maximum Limit
Including Wear

CRANKSHAFT (Continued)

Journals out-of-round001
Main bearing liner width 1st, (188D, 188G)	1.276 to 1.286
Main bearing liner width 1st, (159G, 148G)	1.870 to 1.880
Main bearing liner width 3rd (188D)	1.371 to 1.373
Main bearing liner width 2nd (188G)	1.371 to 1.373
Main bearing liner width 2nd and 4th (188D)950 to 1.000
Main bearing liner width 5th (188D), (188G 3rd.)	1.557 to 1.567
Undersize main bearing liners for service002,.010,.020,.030
Main bearing oil clearance0012 to .0042
Main bearing journal std. O.D. (188G, 188D)	2.8730 to 2.8740
(159G,148G)	2.6230 to 2.6240

Grind to:

.010" O.D. undersize, (188G, 188D)	2.8630 to 2.8640
.020" O.D. undersize, (188G, 188D)	2.8530 to 2.8540
.030" O.D. undersize, (188G, 188D)	2.8430 to 2.8440
.010" O.D. undersize, (159G, 148G)	2.6130 to 2.6140
.020" O.D. undersize, (159G, 148G)	2.6030 to 2.6040
.030" O.D. undersize, (159G, 148G)	2.5930 to 2.5940
Main journal bore I.D. w/o liners (188D, 188G)	3.066 to 3.067
(159G,148G)	2.816 to 2.817

Main journal width between cheeks:

2nd (159G, 148G)	1.499 to 1.502
2nd and 4th (188D)	1.185 to 1.189
2nd (188G)	1.3770 to 1.3740
3rd (188D)	1.3740 to 1.3770
3rd (159G, 148G, 188G)	1.745 to 1.755
5th (188D)	1.745 to 1.755

Connecting rod journal width between cheeks 1.3105 to 1.3145

CAMSHAFT

Type	Parabolic
Bushings (188D)	5, Replaceable
Bushings (188G)	4, Replaceable
Bushings (159G, 148G)	3, Replaceable
Oil Clearance002 to .005..... .007

Engine Block (Continued)

Maximum Limit
Including Wear

CAMSHAFT (Continued)

Bushing lubrication:

Front bushing Pressure lubricated
from oil pump.

Intermediate bushing Gravity flow lubricated

Rear bushing (188D Only) Pressure lubricated with
rear oil metering.

I.D. of bushing installed 1.752 to .1753

Bushing width:

1st (front) (159G,148G) 1.307 to 1.317

1st (front) (188D,188G) 1.213 to 1.223

2nd (159G,148G)713 to .723

2nd, 3rd & 4th (188D)490 to .500

2nd, & 3rd. (188G)490 to .500

3rd (rear) (148G, 159G) 1.177 to 1.197

4th (rear) (188G) 1.213 to 1.223

5th (rear) (188D) 1.213 to 1.223

O.D. of each bearing surface 1.749 to 1.750004

Thrust plate thickness149 to .147

Camshaft end play Taken up by thrust plate

Camshaft end clearance003 to .007

VALVE PUSH ROD LIFTERS

Type Mushroom

Body O.D. std.5605 to .5610

I.D. of block bore, std.5625 to .56350015

GEAR TRAIN

Backlash:

Crankshaft gear to camshaft gear0002 to .006

Camshaft gear to idler gear (Diesel)0004 to .006

Idler gear to fuel pump gear (Diesel)0005 to .007

Crankshaft gear to oil pump gear002 to .008

Crankshaft gear to fuel pump gear (Diesel) Maximum .019

Engine Block (Continued)

Maximum Limit
Including Wear

IDLER GEAR

O.D. of idler gear journal (Diesel)	1.3740 to 1.3755	.0005
I.D. of idler gear w/bushing (Diesel)	1.376 to 1.377	
Thrust washer shims (Diesel)005,.006,.007,.009	
Idler gear end play (Diesel)003

OIL PUMP FRONT MOUNTED

Positive displacement pump	Gear Type	
Pump gears to oil pump cover clearance0015 to .0055	
Pump gears radial clearance002 to .005	
Drive gear to body clearance (188G,159G,148G)003 to .006	
Drive gear to body clearance (188D)0035 to .0065	

Relief valve spring:

Wire thickness (188D)0625	
Maximum O.D. (188G,159G,148G)469	
Maximum O.D. (188D)4844	
Free length (188G,159G,148G)	2	
Free length (188D)	2-1/8	
Load at 1.38 inches (188G,159G,148G)	6-3/4 to 7-1/4 lbs.	
Load at 1.44 inches (188D)	18 to 19 lbs.	
Oil pressure (188G,159G,148G)	24 to 32 PSI	
Oil pressure (188D)	50 to 70 PSI	

Backlash, crankshaft drive gear and oil pump gear002 to .008

Cylinder Head and Valves

Diesel Engines

CYLINDER HEAD

Warpage006"
---------------	--	-------

EXHAUST VALVES

Tappet Clearance (Hot and Cold)014"	
Face Angle	44 ⁰	
Face Run-Out002"
O.D. of Head	1.398" to 1.408"	
O.D. of Stem3399" to .3409"	.002"
Length	6.340" to 6.364"	
Insert Seat Angle	45 ⁰	
Seat Face Width0608" to .0962"	
Seat Run-Out002"

Cylinder Head and Valves (Continued)Maximum Limit
Including Wear

EXHAUST VALVES (Continued)

Insert Height2475" to .2525"	
O.D. of Insert	1.4450" to 1.4505"	
I.D. of Insert	1.245" to 1.255"	

INTAKE VALVES

Tappet Clearance (Hot and Cold)014"	
Face Angle	44°	
Face Run-Out002"
O.D. of Head	1.599" to 1.609"	
O.D. of Stem3409" to .3419"	.002"
Length	6.339" to 6.364"	
Seat Angle	45°	
Seat Run-Out002"
Seat Width0704" to .1057"	

EXHAUST VALVE GUIDES

Length	3.125"	
O.D.6565" to .6575"	
I.D. (Installed and Reamed)3429" to .3439"	.001"
Valve Stem Clearance in Guide002" to .004"	
Protrusion Above Cylinder Head875"	

INTAKE VALVE GUIDES

Length	3.250"	
O.D.6565" to .6575"	
I.D. (Installed and Reamed)3429" to .3439"	.001"
Valve Stem Clearance in Guide001" to .003"	
Protrusion Above Cylinder Head875"	

VALVE SPRING

Free Length	2.375"	
Total Coils	8.25	
Wire Diameter162"	
I.D.958" to .978"	
Compressed to 1.521" (Valve Open)	110 to 118 lbs.	
Compressed to 1.875" (Valve Closed)	53 to 59 lbs.	

ROCKER ARM ASSEMBLY

O.D. of Shaft622" to .623"	
I.D. of Arm Bore624" to .625"	
Shaft Spring		
Free Length	2.5"	
Wire Diameter072"	
Compressed to 1.75"	7.5 to 8.5 lbs.	
Lubrication	Engine oil, camshaft metering	
Shaft Oil Holes	Toward valve side of engine, shaft cannot be rotated.	

Cylinder Head and Valves (Continued)

Spark Ignition Engines

	Maximum Limit Including Wear
CYLINDER HEAD	
Warpage006"
SPARK PLUG	
Gap Setting (18mm)025"
EXHAUST VALVE	
Tappet Clearance (COLD)020"
(HOT)014"
Face Angle	44 ^o
Face Run-out002"
Length (188 and 201)	5.824" to 5.844"
Length (148 and 159)	5.309" to 5.334"
O.D. of Head (188 and 201)	1.398" to 1.408"
O.D. of Head (148 and 159)	1.265" to 1.275"
O.D. of Stem3382" to .3390" .002"
Insert Seat Angle	45 ^o
Seat Contact Width (188 and 201)072" to .085"
Seat Contact Width (148 and 159)090" to .100"
Seat Run-Out002"
Insert Height (188 and 201)2475" to .2525"
Insert Height (148 and 159)198" to .203"
O.D. of Insert (188 and 201)	1.4495" to 1.4505"
O.D. of Insert (148 and 159)	1.3765" to 1.3775"
I.D. of Insert (188 and 201)	1.245" to 1.255"
I.D. of Insert (148 and 159)	1.074" to 1.084"
INTAKE VALVE	
Tappet Clearance (HOT AND COLD)014"
Face Angle	29 ^o
Face Run-Out002"
Length (188 and 201)	5.796" to 5.816"
Length (148 and 159)	5.275" to 5.300"
O.D. of Stem3406" to .3414"
O.D. of Head (188 and 201)	1.514" to 1.524"
O.D. of Head (148 and 159)	1.410" to 1.420"
Seat Angle	30 ^o
Seat Run-out002"
Seat Contact Width (188 and 201)055" to .070"
Seat Contact Width (148 and 159)045" to .060"
EXHAUST VALVE GUIDE	
Length (188 and 201)	2.834"
Length (148 and 159)	2.438"
O.D.6565" to .6575"
I.D. (Installed and Reamed)3422" to .3432" .002"
Protrusion Above Cylinder Head (188 & 201)	1.000"
Protrusion Above Cylinder Head (148 & 159)844"

Cylinder Head and Valves (Continued)

	Maximum Limit Including Wear
INTAKE VALVE GUIDE	
Length (188)	3.125"
Length (148 and 159)	2.688"
O.D.6565" to .6575"
I.D. (Installed and Reamed)3422" to .3432"
Protrusion Above Cylinder Head	1.000"
VALVE SPRING (Exhaust Valve)	
Free Length	2-3/16"
Total Coils	7-3/4
Wire Diameter162"
I.D.970" to .990"
Compressed to 1.332" (Valve Open)	110 to 118 lbs.
Compressed to 1.686" (Valve Closed)	53 to 59 lbs.
Color Code	Silver Stripe Full Length
VALVE SPRING (Intake Valve)	
Free Length	2-3/8"
Total Coils	8-1/4
Wire Diameter162"
I.D.958" to .978"
Compressed to 1.521" (Valve Open)	110 to 118 lbs.
Compressed to 1.875" (Valve Closed)	53 to 59 lbs.
ROCKER ARM ASSEMBLY	
O.D. of shaft622" to .623"
I.D. of Rocker Arm624" to .625"
(Installed and Reamed on 148 and 159)	
Shaft Spring (188 and 201):	
Free Length	2-1/2"
I.D.	11/16"
Wire Diameter072"
Compressed to 1-3/4"	7.5 to 8.5 lbs.
Shaft Spring (148 and 159):	
Free Length	1-3/16"
Total Coils	7
I.D.	11/16"
Wire Diameter072"
Compressed to 11/16"	7.5 to 8.5 lbs.
Lubrication	Engine oil, camshaft metering.
Shaft Oil Holes	Toward valve side of engine. Shaft cannot be rotated.

Cooling System

Type	Pressurized thermostat controlled by-pass forced circulation
Pump Type	Impeller Type - Sealed Pre-Lubricated Bearings.
Fan	Suction Type
Fan belt adjustment	60 Pound tension w/belt tension gauge or 1/2" deflection

Cooling System (Continued)

Cooling System Capacity (188D and 188G) 16-1/2 U.S. Qts.
 (148G and 159G) 14 U.S. Qts.
 Radiator cap 4 PSI
 Thermostat Start to open at approximately 177°F.
 Fully Open at 202°F.
 Cold weather coolant Reputable top brand "High Boiling Point" Anti-Freeze
 Radiator Heavy Duty Fin and Tube Type

Engine Oil Filter

Type Full Flow spin on type
 Capacity 1 U.S. Quart
 Filter replacement Every 200 hours

Air Cleaner

Dry type Replaceable Element
 Change Interval Every six washings or more often if required.
 Element service interval When the red signal appears in the clear plastic window of
 the restriction indicator.
 Dust cup check Whenever element is serviced.

PRE-SCREENER

Service Interval Whenever element is serviced.

RESTRICTION INDICATOR

Replacement When the red signal does not disappear
 after several resets or does not meet the
 specification given below.

CASE NO.	DONALDSON NO.	INCHES OF WATER	INCHES OF MERCURY
A59568	RBX00-2254	27.7" to 32.3"	2.04" to 2.37"

Fuel System

FUEL FILTERS (Spark Ignition Engine)

Fuel strainer servicing Every 200 Hours
 Fuel filter replacement Every 1000 Hours or earlier
 when loss of engine horsepower is indicated.

Fuel System (Continued)

FUEL FILTERS (Diesel Engine) (Starting W/Engine SN2718490)

Filter replacement (Final and Primary)	Every 500 hours or earlier when loss of engine horsepower is indicated.
Final stage filter (Replaceable Cartridge)	Full Flow spin on Type
Primary stage filter (Replaceable Cartridge)	Full Flow spin on Type

FUEL FILTERS (Diesel Engine) (Prior to Engine SN 2718490)

Filter replacement (Final and Primary)	Every 500 hours or earlier when loss of engine horsepower is indicated.
Final stage filter (Replaceable Element)	30 Micron Filtration
Primary stage filter (Replaceable Element)	2 to 5 Micron Filtration

Fuel filter element spring:

No. of coils (active)	5-1/2
Free length	1.120"
Wire diameter060"
I.D. of spring655" to .665"

FUEL TANK

Capacity	22 U.S.Gallons
Water trap	Drain daily

FUEL INJECTION PUMP

Type	Roosa Master, Model DB
Rotation	Counter-clockwise
Mounting	Left hand side of engine
Drive	Gear driven at 1/2 engine speed
Lubrication	Self lubricated by fuel
Governor	Centrifugal type, variable speed, flyweight, integral part of pump

TIMING (Diesel Engines)

Timing marks Located (as equipped) on crankshaft pulley w/pointer on timing gear cover or on flywheel w/pointer on flywheel housing.

1750 RPM Rated Engine Speed	4° BTDC
1850-1900 RPM Rated Engine Speed	8° BTDC
2000-2100 RPM Rated Engine Speed	8° BTDC
2200-2250 RPM Rated Engine Speed	8° BTDC

Fuel System (Continued)

FUEL INJECTOR

Type	Roosa Master-Pencil	
Opening pressure (New)(Part No. A37836)	2750 to 2850 PSI	
Opening pressure (New) (Part No. A51234)	3150 to 3250 PSI	
(Serviced) (Part No. A37836)	2550 to 2650 PSI	
(Serviced) (Part No. A51234)	2950 to 3050 PSI	
Maximum opening pressure difference between cylinders	100 PSI	
Valve lift	1/2 turn off valve seat or .009"	
Spray orifice size011"	
Sac hole size042"	
Sac hole length (Prior Engine SN2717963)195"	
Sac hole length (Starting W/Engine SN2717963)095"	
Number of orifices	4	
Orifice spray angle	160°	
Leakoff rate	3 to 10 drops in 30 seconds at 1500 PSI after first drop appears (serviced injector).	
Opening pressure control spring:		
Free length	A37836 .536"	A51234 .563"
No. of coils	7	7.5
Wire diameter056"	.058"
O.D. of spring272"	.276"
Compressed to (.435"-.457") (.435"-.478")	27 lbs.	29 lbs.

TIMING (Spark Ignition Engines)

Timing marks	Located (as equipped) on crankshaft pulley w/pointer on timing gear cover or on flywheel w/pointer on flywheel housing.	
Static Timing, 2100 RPM Rated Engine Speed	TDC	
Static Timing, 1900 RPM Rated Engine Speed	3° ATDC	
Static Timing, 1750 RPM Rated Engine Speed	5° ATDC	
Running Timing, 2100 RPM Rated Engine Speed	34° BTDC	
Running Timing, 1900 RPM Rated Engine Speed	30° BTDC	
Running Timing, 1750 RPM Rated Engine Speed	25° BTDC	

CARBURETOR (188G and 159G)

Type	Zenith Updraft, Single venturi with magnetic shut-off solenoid.	
Magnetic fuel shut-off solenoid	12 Volt	
Idle Speed adjustment	600 to 650 RPM	
Idle mixture adjustment	Approximately 1 turn open	
Load adjustment	Approximately 2 turns opens	
Float adjustment	1.156", without gasket	
Venturi (at narrow point) (188G)78"	
Venturi (at narrow point) (159G)74"	
Main jet (188G)049"	
Main jet (159G)037"	

Fuel System (Continued)

CARBURETOR (Continued)

Main discharge jet118"
Well vent jet (188G)039"
Well vent jet (159G)051"
Idling jet (188G)025"
Idling jet (159G)020"
Float valve seat (188G)069"
Float valve seat (159G)078"
Idle air bleed (188G)055"
Idle air bleed (159G)059"

Choke Lever spring:

Number of coils	18
Wire diameter031"
Free length	1.000"

Idle adjusting needle spring:

Number of coils	4-1/2
Wire diameter040"
Free length469"

CARBURETOR (148G)

Type	Marvel-Schebler Updraft, Single Venturi with shut-off solenoid.
Magnetic fuel shut-off solenoid	12 Volt
Idle Speed adjustment	600 to 650 RPM
Idle mixture adjustment	Approximately 1 turn open
Load adjustment	Approximately 2 turns open
Float adjustment	1/4" from gasket
Venturi (at narrowest point)782"
Power jet0635"
Main nozzle115"
Upper Vent hole0465"
Idling jet033"
Float valve seat070"
Idle feed hole040"

Choke Lever Spring:

Number of coils	5
Wire diameter0317"
I.D.281"

Idle Adjusting Needle Spring:

Number of coils	5
I.D.203"
Free length531"

Choke Valve Spring:

Number of coils	26 to 27
Wire diameter029"
Free length	1.062"

Throttle Lever Spring

Number of coils	4-1/2 to 5
I.D.165"
Free length281"

Brakes

Type	Heavy Duty, Disc and Band Differential Brakes
Type fluid	Case TCH
Free pedal	1-1/4" to 1-3/4"
Brake Pedal Return Spring:	
Free Length	4.625"
Wire Diameter135"
No. of Coils	22-1/4

Brakes (Continued)

Disc Spring:

Free Length	1.27"
Wire Diameter0857"
No. of Coils	10-1/4
Expand to 1.37"	22-1/2 to 27-1/2 lbs.

Retractor Spring:

Free Length66"
Wire Diameter060"
No. of Coils	5-3/4
Expand to .74"	9 to 11 lbs.

Power Train

SHUTTLE TRACTORS

Reverse idler gear bushing I.D. (burnished)862" to .863"
Countershaft bearing pre-load	4 to 12 in. lbs. required to rotate shaft.
Differential end play	No end play
Differential gear to countershaft pinion backlash005" to .009"
Axle shaft end play0001" to .001"
Countershaft end play (between 2nd and 3rd speed gear)001" to .006"
Gear shift fork rail interlock plug	O.D. .373" to .375" Length .566" to .574"

Main drive shaft end play002" to .005"
Differential center wheel to side wheel backlash (pinion gear)005" to .015"

Rear axle bearing preload 20 to 30 in. lbs. more than no load turning torque

Shifter Lever Support Spring:

Free Length	2"
Wire Diameter1416"
No. of Coils	Optional
Compress to 1-5/16"	35 to 50 lbs.

Range Detent Spring:

Free Length	Optional
Wire Diameter072"
No. of Coils	Optional
Compress to 13/16"	35 to 38 lbs.

Neutral Start Spring:

Free Length	1-9/16"
Wire Diameter056"
No. of Coils	11
Compress to 1.250"	19-1/2 lbs.

Power Train (Continued)

HYDROSTATIC TRACTORS

Forward-Reverse pedals free travel	1/4" to 1/2"
Pinion shaft bearing preload	4 to 12 in. lbs. rolling torque
Dump valve pad to lever clearance045"

Hydrostatic Power Steering

Type	Large Volume Pump, Gear Type, Continuous Running
Relief Valve Pressure	1500 to 1700 PSI
Pump Capacity at No Load Engine RPM	6.5 GPM
Capacity of Reservoir	1 Quart
Capacity of System	3 Quarts
Type of Fluid	Case TCH
Hand Pump Type	Gerotor Bi-Directional, Driven By the Engine
Actuating Cylinders	2 Way Cylinders, Are Integral Part of Steering System

STEERING HAND PUMP

Steering shaft to body clearance006" Max.
Rotor to stator clearance005" Max.

STEERING CONTROL VALVE

Centering Spring:

No. of Coils	6
Free Length860"
Wire Diameter080"
I.D. of Spring625"
Compressed to .824"	1.5-2.5 lbs.




STEERING AXLE

Front wheel toe-in	1/4"
Front pivot pin bushing, installed and removed I.D.	1.744" to 1.746"
Rear pivot pin bushing, installed and removed I.D.863" to .864"

GENERAL TORQUE SPECIFICATION TABLE (Revised 7-72)

USE THE FOLLOWING TORQUES WHEN SPECIAL TORQUES ARE NOT GIVEN

NOTE: These values apply to fasteners as received from supplier, dry, or when lubricated with normal engine oil. They do not apply if special graphited or moly-disulphide greases or other extreme pressure lubricants are used. This applies to both UNF and UNC threads.

SAE Grade No.		5				8 ★					
Bolt head identification marks as per grade NOTE: Manufacturing Marks Will Vary											
		Torque						Torque			
Bolt Size		Foot Pounds		Meter Kilograms		Foot Pounds		Meter Kilograms			
Inches	Millimeters	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.		
1/4	6.35	9	11	1.2	1.5	12	15	1.7	2.1		
5/16	7.94	17	20.5	2.4	2.8	24	29	2.3	4.0		
3/8	9.53	35	42	4.8	5.8	45	54	6.2	7.5		
7/16	11.11	54	64	7.5	8.9	70	84	9.7	11.6		
1/2	12.70	80	96	11.1	13.3	110	132	15.2	18.3		
9/16	14.29	110	132	15.2	18.3	160	192	22.1	26.6		
5/8	15.88	150	180	20.7	24.9	220	264	30.4	36.5		
3/4	19.05	270	324	37.3	44.8	380	456	52.6	63.1		
7/8	22.23	400	480	55.3	66.4	600	720	83.0	99.6		
1	25.40	580	696	80.2	96.3	900	1080	124.5	149.4		
1-1/8	25.58	800	880	110.6	121.7	1280	1440	177.0	199.2		
1-1/4	31.75	1120	1240	154.9	171.5	1820	2000	251.7	276.6		
1-3/8	34.93	1460	1680	201.9	232.3	2380	2720	329.2	376.2		
1-1/2	38.10	1940	2200	268.3	304.3	3160	3560	437.0	492.3		
						★ Thick nuts must be used with Grade 8 bolts					

Special Torques

ENGINE BLOCK

Camshaft nut	80 to 90 Ft. lbs.
Connecting rod nuts	45 to 55 Ft. lbs.
Crankshaft nut	125 to 135 Ft. lbs.
Flywheel to crankshaft bolt	65 to 70 Ft. lbs.
Main bearing cap bolts	90 to 100 Ft. lbs.
Oil pan capscrews (Stamped steel)	10 to 12 Ft. lbs.
Oil pan capscrews (Cast iron)	24 to 28 Ft. lbs.
Oil pan to seal retainer	15 to 20 Ft. lbs.
Oil pan drain plug w/nylon gasket	29 to 30 Ft. lbs.
Oil pump cover capscrews	6 to 8 Ft. lbs.
Oil seal retainer bolts (Grade 8 bolts)	12 to 15 Ft. lbs.
Fuel pump drive gear nut (Diesel)	40 to 50 Ft. lbs.
Timing gear housing (Aluminum Front Cover)	25 to 30 Ft. lbs.

Thank you so much for reading.
Please click the “Buy Now!”
button below to download the
complete manual.



After you pay.

You can download the most
perfect and complete manual in
the world immediately.

Our support email:

ebooklibonline@outlook.com