

	B0 - ENGINE KCASE			Ref: B0.01.0 (1)
Fig.	P/n	QTY	Name	

Notes:

[SAME 503 EURO 2WD -> S*10001L11] 21871 <- [SAME 503 EURO 4WD -> S*10001L11] 21871 <-

2	2.1532.072.0	1	oil seal 26.70x1.78
3	2.3199.405.2	1	plug m 28 p.1.5
5	2.0432.003.7	11	stud bolt m 8 p.1.25 / p.1 x 20
6	2.1559.188.2	3	bush 11.4 x 14 x16
7	2.1539.259.0	6	special oil seal 107.62x2.62
9	0.049.1152.0	1	cock
10	0.014.8700.4	1	crankcase
10.1	2.3130.001.1	9	plug 1/8" gas
10.2	2.3130.002.1	2	plug 1/4" gas
10.3	2.3130.003.1	2	plug 3/8" gas
10.4.1.2.1.1	0.065.1112.7/10	1	support
10.4.1.2.2	2.1699.165.0	1	bush 12.3x15x16
10.4.1.3	0.065.1114.0/10	2	support
10.4.1.4	0.065.1116.3	1	support
10.4.1.4.2	2.1699.165.0	1	bush 12.3x15x16
10.4.1.5	0.065.1117.0	8	screw m 12 x 100
10.4.2	0.065.1140.0	3	special bushing 59X55X20
10.4.3	0.065.1141.0	1	special bushing 59X55X30
10.4.4	0.014.1340.0	1	pin
10.5	2.3179.012.0	1	plug 60
11	0.066.1152.0/10	4	gasket
14	2.1549.154.2	3	bush 4.8x5.8x16
28	2.3131.004.2	1	plug m 18 p.1.5

503 -> S*10001L11

Section: B0 - ENGINE

Ref: B0.01.0 (2)

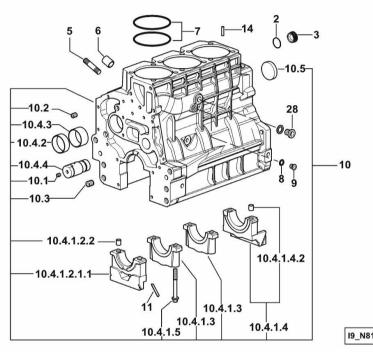


Fig.	P/n	QTY	Name
Notes:			
[SAME 503 EI	URO 2WD -> S*10001L	11] -> 21390	[SAME 503 EURO 4WD -> S*10001L11]
2	2.1532.072.0	1	oil seal 26.70x1.78
3	2.3199.405.2	1	plug m 28 p.1.5
5	2.0432.003.7	11	stud bolt m 8 p.1.25 / p.1 x 20
6	2.1559.188.2	3	bush 11.4 x 14 x16
7	2.1539.259.0	6	special oil seal 107.62x2.62
8	2.1560.010.0	1	gasket 14.2 x 20
9	2.3199.292.0	1	plug 1/4" gas
10	0.014.8700.4	1	crankcase
10.1	2.3130.001.1	9	plug 1/8" gas
10.2	2.3130.002.1	2	plug 1/4" gas
10.3	2.3130.003.1	2	plug 3/8" gas
10.4.1.2.1.1	0.065.1112.7/10	1	support
10.4.1.2.2	2.1699.165.0	1	bush 12.3x15x16
10.4.1.3	0.065.1114.0/10	2	support
10.4.1.4	0.065.1116.3	1	support
10.4.1.4.2	2.1699.165.0	1	bush 12.3x15x16
10.4.1.5	0.065.1117.0	8	screw m 12 x 100
10.4.2	0.065.1140.0	3	special bushing 59X55X20
10.4.3	0.065.1141.0	1	special bushing 59X55X30
10.4.4	0.014.1340.0	1	pin
10.5	2.3179.012.0	1	plug 60
11	0.066.1152.0/10	4	gasket
14	2.1549.154.2	3	bush 4.8x5.8x16
28	2.3131.004.2	1	plug m 18 p.1.5

I9_N8111_00_0-A-002

Ref: B0.01.6 (1)


MONOBLOC ENGINE-GEARBOX CONNECTING FLANGE

Fig.	P/n	QTY	Name

Notes:

Section: B0 - ENGINE

1	0.015.8814.0	1	flange
2	2.0112.511.2	8	screw m 14 p.2 x 30
3	2.0432.255.7	2	stud bolt m 12 p.1.75-1.25x25
4	2.1651.912.0	4	cylindrical plug 12x28
5	2.0512.404.7	2	screw

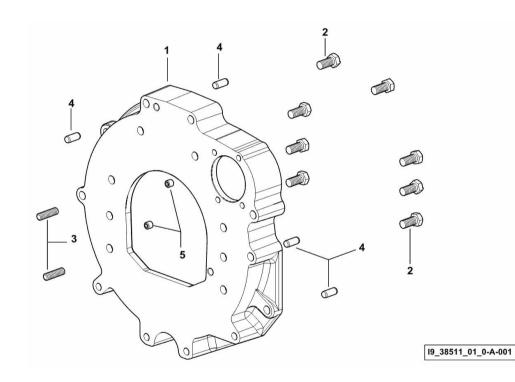

Ref: B0.02.0 (1)


CRAN	KSHAFT			
Fig.	P/n	QTY	Name	

Notes:

Section: B0 - ENGINE

[SAME 503 EURO 2WD -> S*10001L11] 21871 <- [SAME 503 EURO 4WD -> S*10001L11] 21871 <-

7.1	0.007.1554.0/20	1	crankshaft
8	0.065.1215.0/10	4	main half bushing STANDARD
9	0.065.1216.0/10	4	main half bushing STANDARD
10	0.065.1218.0	4	shim STANDARD
15	0.065.1254.0/20	1	gasket
16	0.007.1711.0/10	1	cover
17	2.1475.002.2	9	conical washer 8
18	2.0112.207.2	9	screw m 8 p 1.25 x 20
19	2.1529.073.0	1	special oil seal 110x130x13
22	2.1599.524.7	1	washer 21x60x12
23	0.065.1323.0/30	1	gear Z = 29
24	2.1651.915.0	1	pin 12x35
25	2.3130.001.1	3	plug 1/8" gas
26	2.1720.006.0	1	key 4x6.5
801	0.065.1215.7	1	main half bushing - mm 0.25
802	0.065.1215.8	1	main half bushing - mm 0.50
901	0.065.1216.7	1	main half bushing - mm 0.25
902	0.065.1216.8	1	main half bushing - mm 0.50
1001	0.065.1218.7	1	shim $+$ mm 0.10
1002	0.065.1218.8	1	$shim + mm \ 0.15$

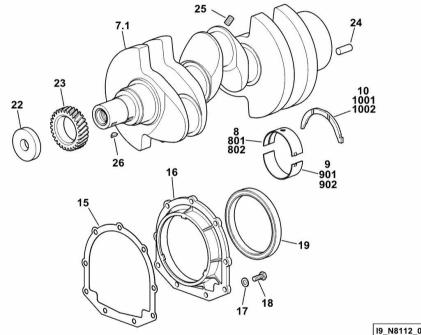

I9_N8112_00_0-A-001

Name

Ref: B0.02.0 (2)

/ 18 17

23

15

22

0

Notes: [SAME 503]	EURO 2WD -> S*10001L1	11] [SA	ME 503 EURO 4WD -> S*10001L11]
7	0.019.2255.0/20	1	crankshaft
8	0.019.5455.0	4	main half bushing STANDARD
9	0.019.5456.0	4	main half bushing STANDARD
10	0.065.1218.0	4	shim STANDARD
15	0.065.1254.0/20	1	gasket
16	0.007.1711.0/10	1	cover
17	2.1475.002.2	9	conical washer 8
18	2.0112.207.2	9	screw m 8 p 1.25 x 20
19	2.1529.073.0	1	special oil seal 110x130x13
22	2.1599.524.7	1	washer 21x60x12
23	0.065.1323.0/30	1	gear Z = 29
24	2.1651.915.0	1	pin 12x35
26	2.1720.006.0	1	key 4x6.5
1001	0.065.1218.7	1	$shim + mm \ 0.10$
1002	0.065.1218.8	1	$shim + mm \ 0.15$

QTY

Section: B0 - ENGINE

P/n

CRANKSHAFT

Fig.

I9_N8112_00_0-A-002


Ref: B0.02.4 (1)

Section: B0 - ENGINE CRANKSHAFT PULLEY Fig. P/n

P/n QTY Name

Notes:

3	0.014.5093.0	1	pulley
5	0.085.1248.0/20	1	hub
6	2.0399.144.7/10	1	screw m 20 p.1.5x51
8	2.1720.006.0	1	key 4x6.5

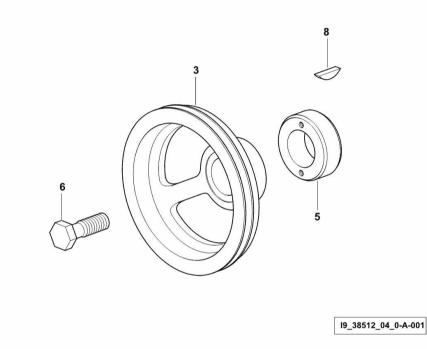

Name

Ref: B0.02.7 (1)

Section: B0 - ENGINE ENGINE FLYWHEEL


P/n

Fig.

Notes: [SAME 503 EURO 2WD -> S*10001L11]

1	0.012.0925.3	1	flywheel
1.2	0.069.1242.0	1	crown wheel $Z = 121$
2	2.0119.174.0/10	6	screw m 12 p.1.25x45
3	2.2041.008.9	1	ball bearing 20x47x14

QTY

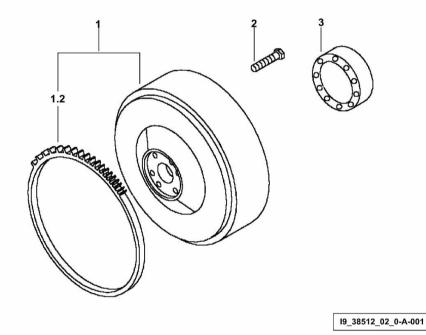

503 ->	S*1	0001I	11
--------	-----	-------	----

Ref: B0.02.8 (1)


Section: B0 - ENGINE ENGINE FLYWHEEL

Fig. P/n QTY Name

Notes:

- FOR TYPES WITH DOUBLE CLUTCH [SAME 503 EURO 2WD -> S*10001L11] - FOR TYPES WITH DOUBLE CLUTCH [SAME 503 EURO 4WD -> S*10001L11]

1	0.007.1617.3/30	1	flywheel
1.2	0.069.1242.0	1	crown wheel $Z = 121$
2	2.0119.174.0/10	6	screw m 12 p.1.25x45
3	2.2041.008.9	1	ball bearing 20x47x14

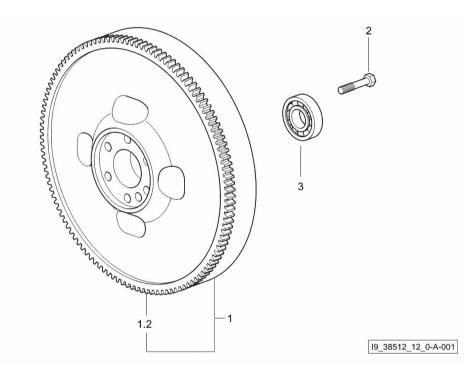


Section: B0 - ENGINE COOLANT PUMP DRIVEBELT

Fig. P/n QTY Name

Notes:

[SAME 503 EURO 2WD -> S*10001L11] [SAME 503 EURO 4WD -> S*10001L11]

31 2.4119.198.0 1 vee belt AV 10.7x1240 mm(->20941)

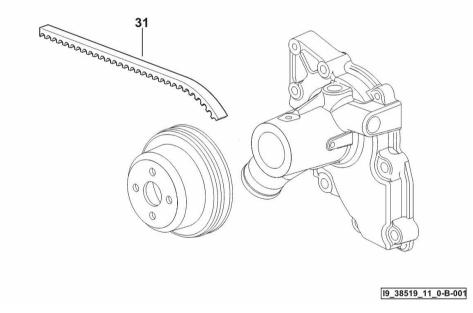



CVI INDED DISTON CONNECTING DOD

Section: B0 - ENGINE


5

		CYLINI	DER - PISTON - CO	ONNEC	TING ROD
		Fig.	P/n	QTY	Name
		Notes: [SAME 503	EURO 2WD -> S*10001L1	11] [SAM	1E 503 EURO 4WD -> S*10001L11]
		1	0.386.0065.A	3	cyl. piston assembly "A" - CLASS A
		1	0.386.0065.B	3	cyl. piston assembly "B" - CLASS B
	€N()-327	1.1	0.A12.2675.0	1	engine cylinder "A" - CLASS A
		1.1	0.B12.2675.0	1	engine cylinder "B" - CLASS B
	J	1.2	0.379.0060.A	1	complete piston "A" - CLASS A
	() <= -3	1.2	0.379.0060.B	1	complete piston "B" - CLASS B
2		1.2.1	0.086.0052.6/10	1	piston ring set
5		1.2.2	2.1411.014.1	1	circlip 35
	[]─── 3.1┘	1.2.3	0.078.1236.0	1	piston pin Ø 18 / Ø 35 / L = mm 86
[2	0.065.1225.0	6	con.rod half bushing STANDARD - $A = 28.75 \rightarrow 29.00$ () <=
		2	0.065.1225.7	6	con.rod half bushing - mm 0.25 $() \leq =$
	3	2	0.065.1225.8	6	con.rod half bushing - mm 0.50 $() \leq =$
	=> ()	3	0.019.2226.3/10	1	engine connecting rod $=>()$
4		3	0.078.1220.3/30	1	engine connecting rod () <=
()	3.1	3.1	2.0399.213.0	2	screw m 12 p.1.25x61.5 () <=
	<u>+</u>	3.1	2.0399.365.0	2	screw m 10 p.1.25x61.5 => ()
		3.2	2.1559.114.0/10	1	special bushing () <=
		3.2	2.1559.532.0	1	special bushing $34.60x39.130x36.65$ => ()
		4	0.019.5453.0	3	con.rod half bushing STANDARD - $A = 29.85 \rightarrow 30.10$

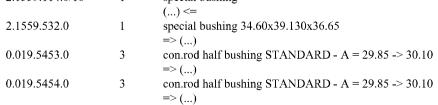

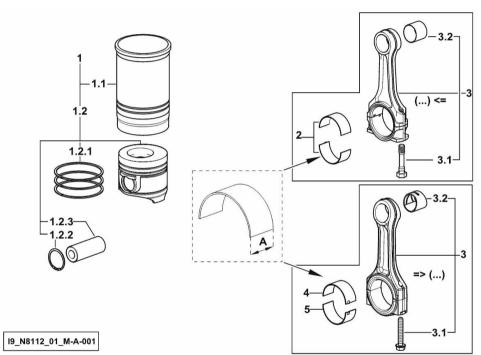

503 -> S*10001L11

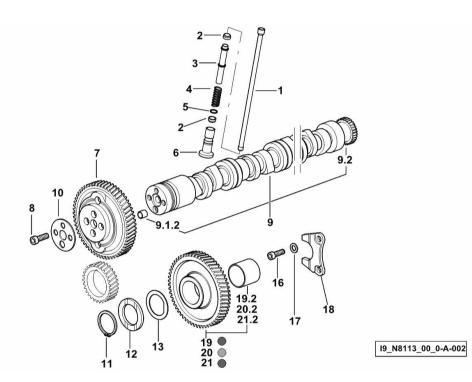

		5 -> 5"10001L11
		Ref: B0.04.0 (2)
P/n	ΟΤΥ	Name
	<u></u>	
3 EURO 2WD -> S*10001L	11] [SAN	1E 503 EURO 4WD -> S*10001L11]
0.065.1331.2	6	rod
2.1569.114.0/10	12	gasket 14x18.5x8
0.065.1332.0	6	sleeve
2.4019.300.1/10	6	spring 18.5x52x2
2.1599.437.0	6	shoulder ring
0.065.1330.0	6	tappets
0.013.5017.0	1	gear z=58
2.0132.207.2	4	screw m 10 p.1 x 25
0.012.8270.4	1	camshaft
2.1559.398.0	1	bushing 10.5x13x12
0.065.1324.0/10	1	gear Z = 32
0.065.1350.0	1	small disc
2.1410.016.1	1	circlip 40
0.065.1352.0	1	shim
0.018.2233.0	2	shoulder ring
2.0312.205.2		screw
2.1480.014.1	2	washer 8
0.065.1353.0	1	small plate
0.007.1177.3/20	0.1	gear z = 57
		- WITH RED IDENTIFICATION STAMP
2.1559.185.0/10	1	bushing
0.007.1178.3/20	0.1	gear z = 57
		- WITH YELLOW IDENTIFICATION STAMP
2.1559.185.0/10	1	bushing
0.007.1179.3/20	0.8	gear $z = 57$
		- WITH GREEN IDENTIFICATION STAMP
2.1559.185.0/10	1	bushing
	B EURO 2WD -> S*10001L 0.065.1331.2 2.1569.114.0/10 0.065.1332.0 2.4019.300.1/10 2.1599.437.0 0.065.1330.0 0.013.5017.0 2.0132.207.2 0.012.8270.4 2.1559.398.0 0.065.1324.0/10 0.065.1352.0 0.018.2233.0 2.0312.205.2 2.1480.014.1 0.065.1353.0 0.007.1177.3/20 2.1559.185.0/10 0.007.1179.3/20	HAFT QTY B EURO 2WD -> S*10001L11] [SAM 0.065.1331.2 6 2.1569.114.0/10 12 0.065.1332.0 6 2.4019.300.1/10 6 2.1599.437.0 6 0.065.1330.0 6 0.013.5017.0 1 2.0132.207.2 4 0.012.8270.4 1 2.1559.398.0 1 0.065.1350.0 1 2.1410.016.1 1 0.065.1352.0 1 0.018.2233.0 2 2.0312.205.2 2 2.1480.014.1 2 0.065.1353.0 1 0.007.1177.3/20 0.1 2.1559.185.0/10 1 0.007.1179.3/20 0.8

$503 -> S^*1$	10001L11
---------------	----------

Name

Ref: B0.04.12 (1)


Section: B0 - ENGINE TIMING CASE

P/n QTY

Notes:

Fig.

5 16	2.0432.003.7 2.0312.214.2	11 7	stud bolt m 8 p.1.25 / p.1 x 20 screw m 8 p.1.25 x 40
17	2.1480.014.1	15	washer 8
18	0.013.4981.0	1	guard
19	0.065.1150.0/30	1	gasket
20	2.1470.004.2	2	lock washer 8
21	2.1011.405.2	2	nut m 8 p.1
22	2.0312.208.2	8	screw m 8 p.1.25 x 25
23	2.1529.167.0	1	oil seal

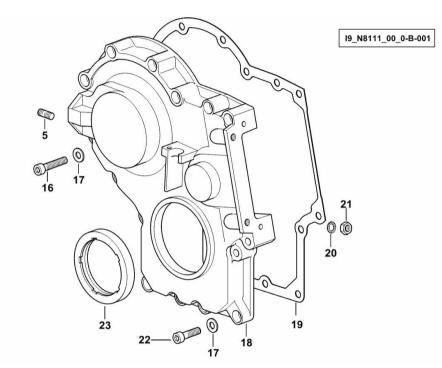

Name

Ref: B0.05.0 (1)

Section: B0 - ENGINE CYLINDER HEAD

P/n

/ 11


Notes:

Fig.

[SAME 503 EURO 2WD -> S*10001L11] [SAME 503 EURO 4WD -> S*10001L11]

ΟΤΥ

1	2.0399.130.2/10	3	screw m 8x36x44
2	2.1569.170.0/10	3	gasket 8.2 x 14
3	0.016.0291.0	3	•
4	0.069.1450.0/30	3 1	small cap tappet gasket
7	2.1011.421.2	6	nut m 10 p.1.25
9.2	0.021.1434.0	2	screw
9.10.3	2.1011.405.2	2	nut m 8 p.1
9.10.4	0.066.1432.3	2	rocker arm
9.10.4.2	2.1559.021.0/40	1	bushing 15x19x22
9.10.4.2	2.1410.055.7	2	circlip 19
9.10.5	0.066.1431.0	1	pin
9.10.6.1	0.066.1430.0/10	1	-
9.10.0.2	2.1599.432.0	2	support shoulder ring
9.10.7	2.1530.051.0	23	oil seal 20.22x3.53
10		5 12	
17	0.012.2673.0		screw m 14 p.2x141
	0.014.8945.3/10	1	head
18.1.2	0.014.8942.0	1	valve seat mm 45.118
18.1.3	0.014.8941.0	1	valve seat mm 40.653
18.1.4	0.007.1779.0/20	2	valve guide
18.1.5	0.010.6041.0/10	1	bush
18.1.6	2.3170.012.2	2	expansion plug Ø 30
18.2	0.066.1421.0	1	exhaust valve
18.3	0.010.6016.0	1	inlet valve mm 43.63 / Ø mm 9
18.4	0.066.1425.0	2	cup
18.5	0.074.1423.0	4	conical valve cotter
18.6	2.4019.287.0	2	spring
18.7	2.1519.117.0	2	special oil seal
18.8	2.0432.161.7	1	stud bolt m 10 p.1.5 / p.1.25 x 40
18.9	2.0432.163.7	2	stud bolt m 10 p.1.5 / p.1.25 x 45
20	2.0432.011.7	3	stud bolt m 8 p.1.25 / p.1 x 40
21	2.0432.005.7	3	stud bolt m 8 p.1.5 / p.1 x 25
25	0.014.5260.0/10	0.5	gasket - A - mm 1.4
26	0.014.5259.0/10	2	gasket - B - mm 1.2
27	0.014.5261.0/10	0.5	gasket - C - mm 1.6
			C

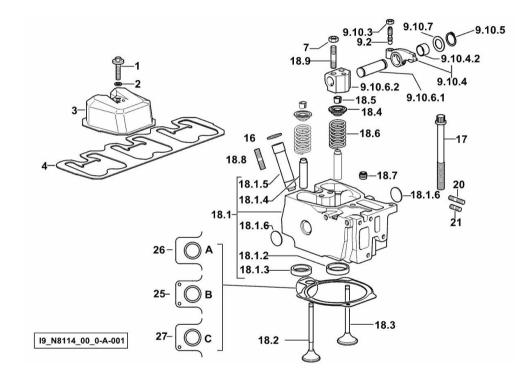

Name

Ref: B0.06.0 (1)

Section: B0 - ENGINE ENGINE OIL PUMP

P/n


Notes:

Fig.

[SAME 503 EURO 2WD -> S*10001L11] [SAME 503 EURO 4WD -> S*10001L11]

ΟΤΥ

2.5		•	1
35	0.065.1560.0/30	2	gasket
36	2.0169.005.2	2	screw m 6 p.1 x 12
37	2.1652.711.0	2	cylindrical plug 8x25
38	0.075.1551.4/30	1	support
38.1	0.075.1551.3/40	1	support
38.1.2	2.1559.186.0	1	special bushing 26 x 31.5 x 35
38.2	2.1219.025.2/10	1	ring nut m 36 p.1.5
38.3	2.1410.057.1	1	circlip 15
38.4	2.1589.153.0	1	shoulder ring 15.2 x 19 x 1.00
38.5	2.1589.146.0	2	shoulder ring 15.2 x 19 x 0.15
38.6	2.1589.147.0	2	shoulder ring 15.2 x 19 x 0.10
38.7	2.2020.001.0	1	ball bearing 15 x 32 x 8.00
38.8	2.1589.148.0	1	shoulder ring 28.2 x 31.8 x 0.5
38.9	2.1589.150.0	2	shoulder ring 28.2 x 31.8 x 0.1
38.10	2.1589.151.0	2	shoulder ring 28.2 x 31.8 x 0.15
38.11.1	0.065.1558.6/10	1	bevel drive
38.11.2	0.065.1559.0	1	bush
38.12	2.2680.020.0	1	ring 12 x 15 x 12
38.13	2.2725.016.0	1	roller cage 15 x 21 x 12
38.14	2.0342.007.2	1	screw m 4 p.0.7x25
38.15	2.0399.128.2/10	1	screw m 8 p.1 x 8
38.16	2.2030.002.0	1	ball bearing 12 x 28 x 8
40	0.065.1569.0/40	1	shaft
41	0.065.1562.0/10	1	joint
42	0.014.7994.4	1	oil pump
43	2.1470.006.2	2	lock washer 10
44	2.0112.323.2	2	screw m 10 p.1.5x70
			1

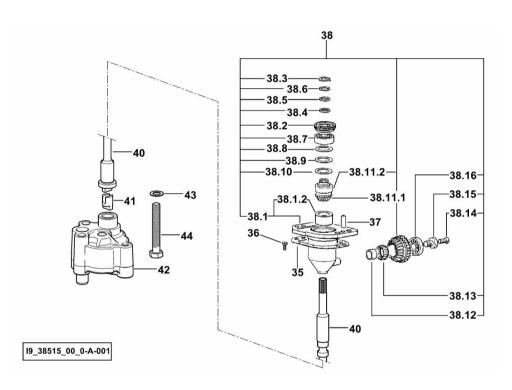

503	->	S*1	000	1T	.11
505		0 1			

Ref: B0.06.8 (1)


Section: B0 - ENGINE LUBRICATION

P/n QTY Name

Notes:

Fig.

1	0.065.1160.3/20	3	valve
50	2.1099.108.2	3	special nut m 10 p.1
51	2.1560.006.0	12	gasket 10.2 x 16
52	0.086.1550.2	3	sprayer nozzle
55	2.0312.221.2	2	screw m 8 p.1.25x75
56	2.1480.014.1	2	washer 8
57	0.012.0688.4	1	sediment bowl
57.1	0.066.1553.0	1	cover
57.2	0.066.1554.0/20	1	gasket
57.3	2.0399.304.2	4	screw m 4 x 10
57.4.1	0.066.1555.0	1	tube
57.4.2	0.012.0688.0	1	small tank
58	2.1532.012.0	1	oil seal 6.75 x 1.78
59	2.1539.072.0	2	special oil seal 23.52 x 1.78
60	0.066.1558.0	1	bush
61	0.066.1557.2	1	tube
62	2.3350.003.1	1	nosepiece 8
63	2.3339.418.1	1	pipe fitting m 12 p.1
65	0.007.1427.0	1	tube
66	0.002.8816.0	1	small plate
67	2.0112.007.2	1	screw m 6 p.1 x 20
68	2.1011.103.2	1	nut m 6 p.1
69	2.1470.002.2	1	lock washer 6

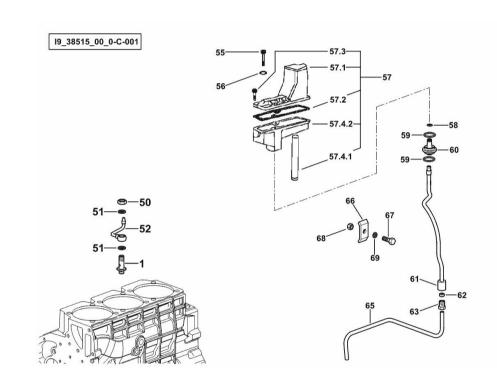

Thank you so much for reading. Please click the "Buy Now!" button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email:

ebooklibonline@outlook.com