
Section: ENGINE Ref: 01.00.3

CRANKCASE

Fig.	P/n	QTY	Name
Notes:			
[LASER 130	0]		
1	0.007.1102.6/20	1	crankcase
1.1	2.3130.001.1	14	plug 1/8" gas
1.2	2.3130.002.1	2	plug 1/4" gas
1.3	2.3130.003.1	8	plug 3/8" gas
1.4	2.3179.012.0	1	plug 60
1.5	0.000.0000.1		cannot be supplied
1.5.1	0.065.1112.7	1	support
1.5.1.2	2.1699.165.0	1	bush 12.3x15x16
1.5.2	0.065.1114.0/10	5	support
1.5.3	0.007.0848.3/10	1	support
1.5.3.2	2.1699.165.0	1	bush 12.3x15x16
1.5.4	0.065.1117.0	14	screw m 12 x 100
1.5.6	0.065.1140.0	6	special bushing 59X55X20
1.5.7	0.065.1141.0	1	special bushing 59X55X30
1.5.8	0.066.1151.0	1	pin
2	0.066.1152.0/10	4	gasket
3	2.1532.072.0	1	oil seal 26.70x1.78
4	2.3199.405.2	1	plug m 28 p.1.5
5	2.0432.003.7	18	stud bolt m 8 p.1.25 / p.1 x 20
6	2.1559.188.2	6	bush 11.4 x 14 x16
7	2.1539.193.0	12	special oil seal 107.62x2.62
10	2.1560.010.0	1	gasket 14.2 x 20
11	2.3199.292.0	1	plug 1/4" gas
13	2.1549.154.2	6	bush 4.8x5.8x16
14	2.3120.101.0	1	plug m 18 p.1.5
15	2.1560.014.0	1	washer 18.2 x 24

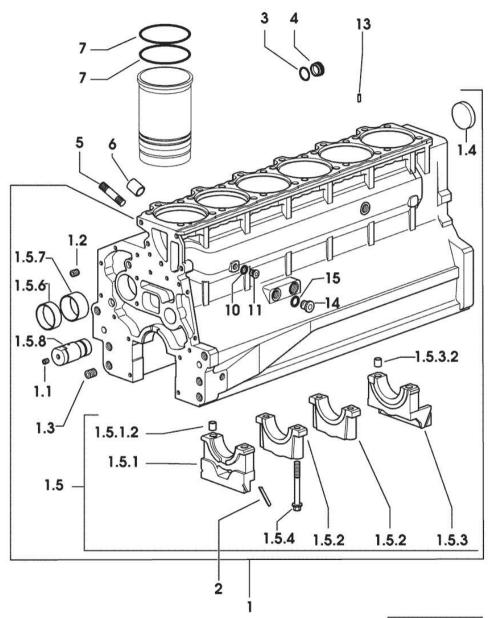


9_01311_00_0_0


Section: ENGINE Ref: 01.00.8

MONOBLOC ENGINE-GEARBOX CONNECTING FLANGE

Fig.	P/n	QTY	Name	
Notes: [LASER 1:	30]			
1	2.3131.003.2	1	plug m 16 p.1.5	
2	2.0112.534.2	2	screw m 14 p.2x125	
3	2.1310.009.2	2	flat washer 15x20	
6	2.0439.250.7	1	stud bolt m 12 / m 10 x 30	
7	0.011.9294.0/10	1	bush	
8	0.007.0809.0/20	1	flange	
9	2.0112.513.2	11	screw m 14 p.2 x 35	
10	2.0432.328.7	4	stud bolt m 14 p.2-1.5x130	
12	2.0112.531.2	2	screw m 14 p.2x110	
13	2.1651.911.0	2	cylindrical plug	
14	2.1011.108.2	6	nut m 14 p.2	
15	2.0432.257.7	1	stud bolt m 12 p.1.75 - 1.25 x 30	
16	2.0312.520.2	2	screw m 14 p.2x70	

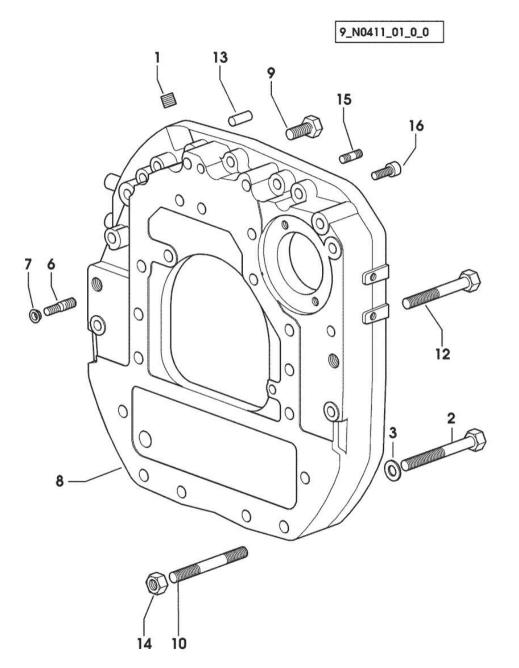

9_33611_01_0_0

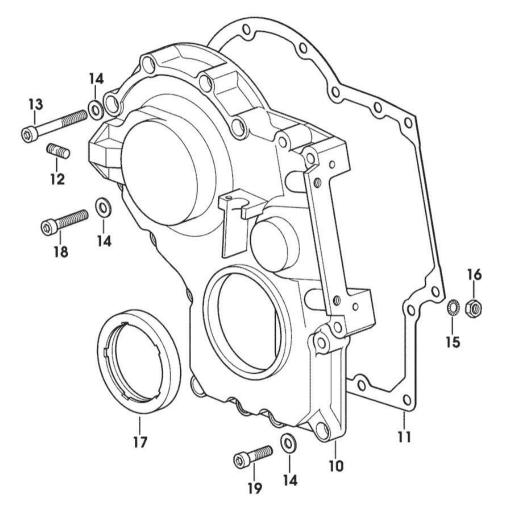


LASER 130 -> 6001

Section: ENGINE

Ref: 01.00.9

TIMING CASE

Fig.	P/n	QTY	Name
Notes: [LASER 130]			
10	0.013.4981.0	1	guard
11	0.065.1150.0/30	1	gasket
12	2.0432.003.7	2	stud bolt m 8 p.1.25 / p.1 x 20
13	2.0312.219.2	4	screw m 8 p.1.25x65
14	2.1480.014.1	15	washer 8
15	2.1470.004.2	4	lock washer 8
16	2.1011.405.2	2	nut m 8 p.1
17	2.1529.141.0	1	special oil seal
18	2.0312.214.2	3	screw m 8 p.1.25 x 40
19	2.0312.208.2	8	screw m 8 p.1.25 x 25

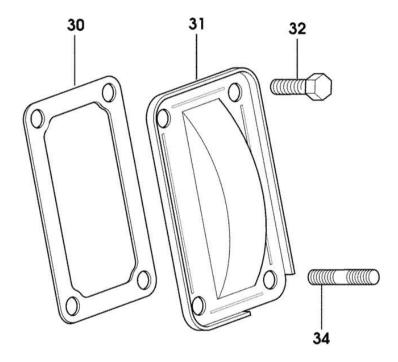

9_33011_04_0_0

LASER 130 -> 6001

Section: ENGINE

Ref: 01.00.14

CASING COVER


Fig.	P/n	QTY	Name
Notes: [LASER 130]			
30	0.065.1152.0	1	gasket
31	0.065.1151.0	1	cover
32	2.0112.205.2	2	screw m 8 p.1.25 x 16
34	2.0432.005.7	2	stud bolt m 8 p.1.5 / p.1 x 25

Section: ENGINE

Ref: 01.00.15

GUARD PLATE

Fig.	P/n	QTY	Name
Notes: [LASER 130]			
[E/ISER 150]			
1	0.007.1262.3/50	1	guard
2	0.007.1271.0/10	1	small column m 8 p.1.25 / L = mm 60
3	0.007.1272.0/10	2	small column m $8 \text{ p.1.25 / L} = \text{mm } 50$
5	2.1310.004.2	3	flat washer 8.4x17
7	2.0112.203.2	3	screw m 8 p.1.25 x 12

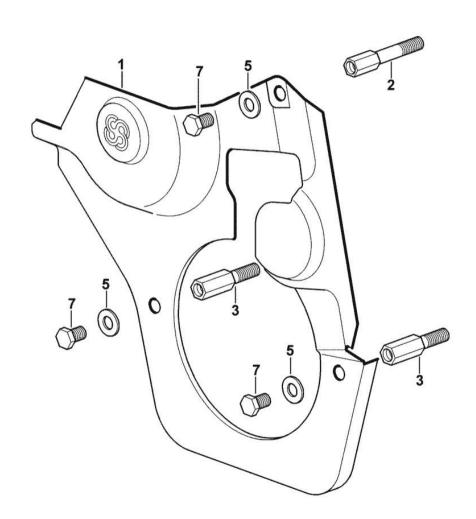


9_33011_02_0_0


Section: ENGINE

Ref: 01.00.20

CRANKSHAFT

Fig.	P/n	QTY	Name
Notes: [LASER 130]		·	
2	2.1651.915.0	1	pin 12x35
3	0.065.1215.0	7	main half bushing STANDARD
3	0.065.1215.7		main half bushing - mm 0.25
3	0.065.1215.8	_	main half bushing - mm 0.50
4	0.065.1216.0	7	main half bushing
4	0.065.1216.7		main half bushing - mm 0.25
4	0.065.1216.8	4	main half bushing - mm 0.50
5	0.065.1218.0	4	shim STANDARD
5	0.065.1218.7		shim + mm 0.10
5	0.065.1218.8	1	shim + mm 0.15
6	2.1599.524.7	1	washer 21x60x12
7 9	2.1720.006.0 0.065.1254.0/20	1	key 4x6.5
10	0.003.1234.0/20	1	gasket
10	2.1529.073.0	1	cover
12	2.1475.002.2	1 9	special oil seal 110x130x13 conical washer 8
13	2.0112.207.2	<i>9</i> 7	screw m 8 p 1.25 x 20
13	2.3130.001.1	6	plug 1/8" gas
15	2.1589.137.0	2	shoulder ring 71x110x1
16	2.0432.003.7	2	stud bolt m 8 p.1.25 / p.1 x 20
17	2.1011.105.2	2	nut m 8 p.1.25
20	0.009.3704.3	1	antivibration pulley
21	0.010.4320.3/20	1	crankshaft
21.2	0.007.0855.0/10	1	gear
22	0.011.2206.0/20	1	hub
23	2.0399.144.7/10	1	screw m 20 p.1.5x51
4 5	2.05/2.144.7/10		5010 W III 20 P.1.5 A5 I

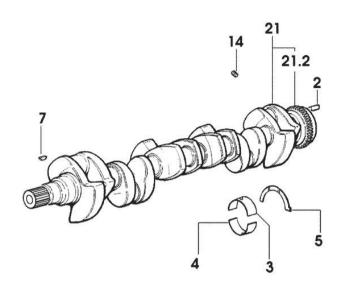

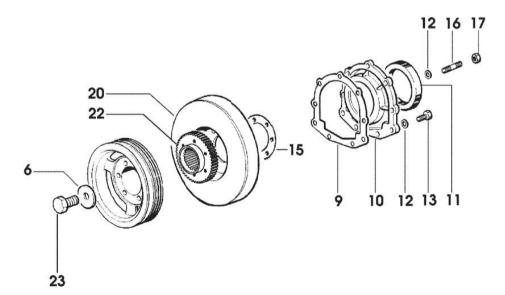



9_37912_00_0_0

Section: ENGINE Ref: 01.00.26

CYLINDER - PISTON - CONNECTING ROD

Fig.	P/n	QTY	Name
Notes: [LASER 130	0]		
1	0.384.0065.A	6	cyl. piston assembly "A" - CLASS A
1	0.384.0065.B	6	cyl. piston assembly "B" - CLASS B
1.1	0.A12.2675.0	1	engine cylinder "A" - CLASS A
1.1	0.B12.2675.0	1	engine cylinder "B" - CLASS B
1.2	0.383.0060.A	1	complete piston "A" - CLASS A
1.2	0.383.0060.B	1	complete piston "B" - CLASS B
1.2.1	0.338.0052.6/20	1	piston ring set
1.2.2	2.1411.014.1	2	circlip 35
1.2.3	0.078.1236.0	1	piston pin Ø $18 / Ø 35 / L = mm 86$
2	0.065.1225.0	12	con.rod half bushing STANDARD - $A = 28.75 -> 29.00$
2	0.065.1225.7	12	con.rod half bushing - mm 0.25
2	0.065.1225.8	12	con.rod half bushing - mm 0.50
3	0.078.1220.3/30	6	engine connecting rod
3.1	2.0399.213.0	2	screw m 12 p.1.25x61.5
3.2	2.1559.114.0/10	1	special bushing

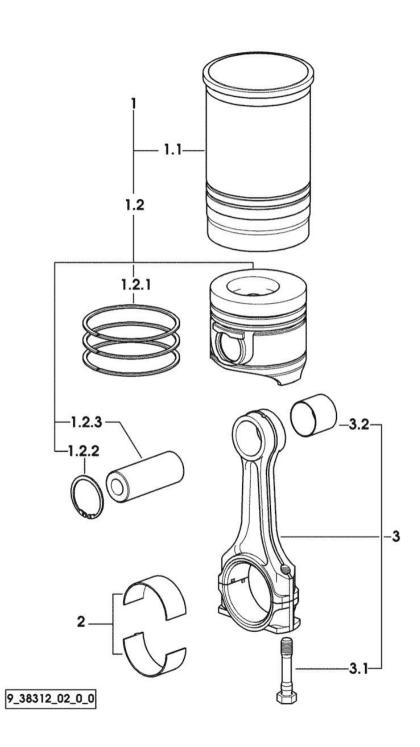

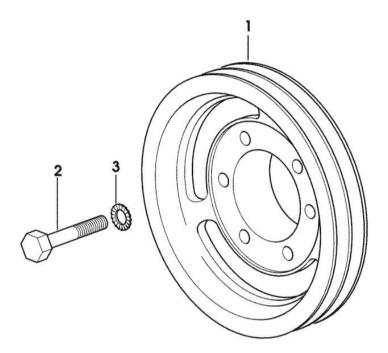

9_33712_01_0_0


LASER 130 -> 6001

Section: ENGINE Ref: 01.00.27

CRANKSHAFT PULLEY

Fig.	P/n	QTY	Name
Notes: [LASER 130]			
1	0.007.0962.0/30	1	pulley
2	2.0112.322.2	6	screw m 10 p.1.5x65
3	2.1470.006.2	6	lock washer 10

9_N0412_01_0_0

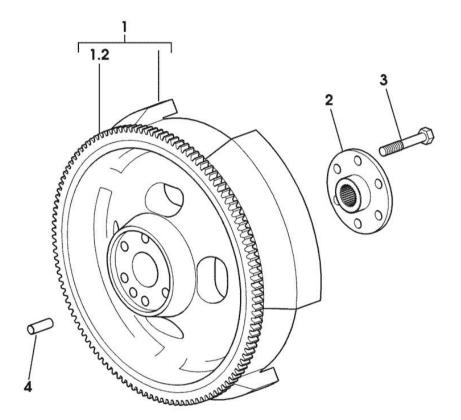

LASER 130 -> 6001

Section: ENGINE Ref: 01.00.32

ENGINE FLYWHEEL


Fig.	P/n	QTY	Name
Notes: [LASER 130]			
1	0.078.1241.3	1	flywheel
1.2	0.065.1242.0	1	crown wheel $Z = 123$
2	0.288.3625.0	1	flange
3	2.0139.023.2	6	screw
4	2.1651.915.0	1	pin 12x35

Section: ENGINE

Ref: 01.00.38



Fig.	P/n	QTY	Name
	'		
Notes:			
[LASER 130]			
1	0.065.1331.2	12	rod
1	2.1569.114.0/10	24	
2 3	0.065.1332.0	12	gasket 14x18.5x8 sleeve
	2.4019.300.1/10	12	
4			spring 18.5x52x2
5	2.1599.437.0	12	shoulder ring
6	0.065.1330.0	12	tappets
7	0.065.1354.0/20	1	gear z=58
8	2.0132.207.2	4	screw m 10 p.1 x 25
9	0.075.1310.3/30	1	camshaft
9.1	0.065.1324.0/10	1	gear Z = 32
10	0.065.1350.0	1	small disc
11	2.1410.016.1	1	circlip 40
12	0.065.1352.0	1	shim
13	0.065.1351.0	2	shoulder ring
14	0.007.1188.0/30	1	gear Z = 29
16	2.0312.205.2	2	screw
17	2.1480.014.1	2	washer 8
18	0.065.1353.0	1	small plate
19	0.007.1177.3/20		gear z = 57
			- WITH RED IDENTIFICATION STAMP
19.2	2.1559.185.0/10	1	bushing
20	0.007.1178.3/20		gear z = 57
			- WITH YELLOW IDENTIFICATION STAMP
20.2	2.1559.185.0/10	1	bushing
21	0.007.1179.3/20	1	gear z = 57
			- WITH GREEN IDENTIFICATION STAMP
21.2	2.1559.185.0/10	1	bushing
22	2.1559.398.0	1	bushing 10.5x13x12

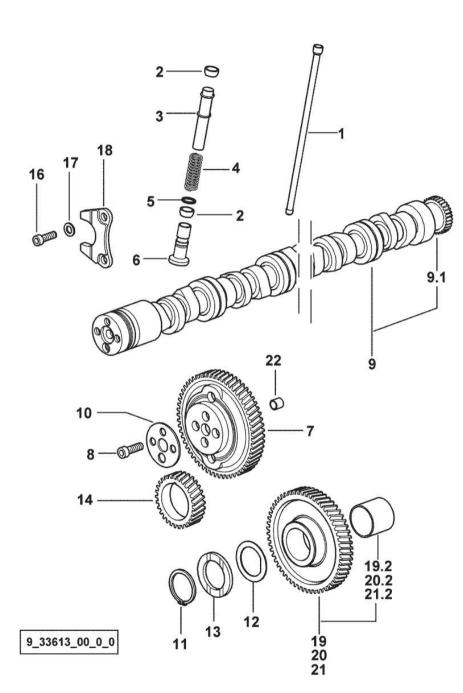


Ref: 01.00.39

Section: ENGINE

CYLINDER HEAD

	Beetion. L.	NOINE		Kei. 01.00.37
31 _33 36 30	CYLIND	ER HEAD		
	Fig.	P/n	QTY	Name
3 7 34				
	Notes:			
	[LASER 130]		
	1	0.007.1360.3/60	6	head
	1.2	0.078.1426.0	1	valve seat
10.10	1.3	0.066.1427.0	1	valve seat
10.10.3 10.10 35 32	1.4	0.007.1779.0/10	2	valve guide
10.10.3 10.10 35 32	1.5	0.010.6041.0	1	bush
15 10.10.4.2	1.6	2.3170.012.1	2	expansion plug 30
14	2	2.0432.011.7	6	stud bolt m 8 p.1.25 / p.1 x 40
10.10.3	3	2.0432.005.7	6	stud bolt m 8 p.1.5 / p.1 x 25
0.6 -10.10.6.2 10.10.7	6	0.074.1423.0	24	conical valve cotter
10.1-0)	7	0.066.1425.0	12	cup
19~	8	2.4019.287.0	12	spring
	9	0.012.2673.0	24	screw m 14 p.2x141
0 9 7	10	0.000.0000.1		cannot be supplied
	10.1	0.066.1431.0	1	pin
18—11	10.2	0.021.1434.0	2	screw
	10.10	0.000.0000.1		cannot be supplied
	10.10.3	2.1011.405.2	2	nut m 8 p.1
-15 \ 8	10.10.4	0.066.1432.3	2	rocker arm
1.5 \	10.10.4.2	2.1559.021.0/40	1	bushing 15x19x22
1.4	10.10.5	2.1410.055.7	2	circlip 19
	10.10.6	0.000.0000.1		cannot be supplied
	10.10.6.2	0.066.1430.0/10	1	support
	10.10.7	2.1599.432.0	2	shoulder ring
1——————————————————————————————————————	14	2.0432.163.7	6	stud bolt m 10 p.1.5 / p.1.25 x 45
	15	2.1011.421.2	12	nut m 10 p.1.25
	18	2.0432.161.7	6	stud bolt m 10 p.1.5 / p.1.25 x 40
1.6	19	2.1530.051.0	6	oil seal 20.22x3.53
	20	0.078.1451.0/40		head gasket -A-
	21	0.078.1452.0/30		head gasket -B-
	22	0.078.1453.0/40	1	head gasket -C-
	30	0.078.1450.3/10	1	cover
-1.3	31	0.078.1440.3/10	1	cover
1.2	31.3	2.3171.008.4	1	plug 20
	32	0.009.3877.0/10	2	tappet gasket
Se TTE	33	2.0399.288.2/10	6	screw m 8x36x46
—20 - 21 - 22	34	2.1539.151.0	6	special oil seal 9.19 x 2.62
	35 36	2.6859.091.0	2	clamp
9_34114_00_0_0	36	0.075.1452.0/10	1	sleeve
	37	2.1519.117.0	12	special oil seal




9_34014_01_0_0

LASER 130 -> 6001

Section: ENGINE Ref: 01.00.45

INLET AND EXHAUST VALVES


Fig.	P/n	QTY	Name
Notes: [LASER 130]			
1 2	0.007.1147.0/10 0.007.1146.0/10	6 6	exhaust valve mm 39.1 / Ø mm 9 inlet valve mm 43.63 / Ø mm 9




Section: ENGINE Ref: 01.00.56

OIL PAN

Fig.	P/n	QTY	Name
Notes:			
[LASER 130]			
14	0.007.0638.2	6	sprayers
15	2.1099.108.2	6	special nut m 10 p.1
16	2.1560.006.0	12	gasket 10.2 x 16
17	2.3249.022.2	6	pipe fitting m 10 p.1
18	2.1470.004.2	34	lock washer 8
20	2.0112.215.2	25	screw m 8 p.1.25 x 40
21	0.007.1311.0/10	1	oil sump
22	2.0112.229.2	3	screw m 8 p.1.25 x 100
23	2.0112.235.2	2	screw m 8 p.1.25 x 130
24	2.0112.241.2	4	screw m 8 p.1.25 x 160




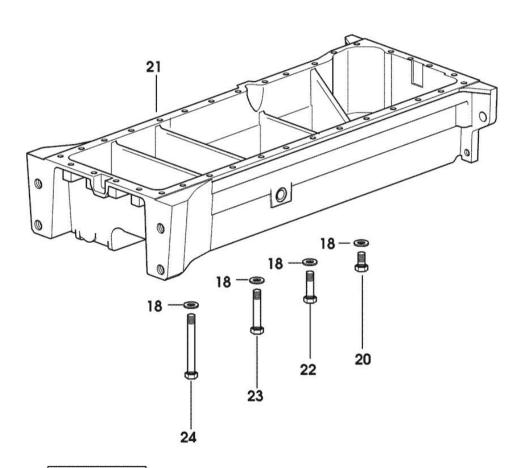

9_34015_01_0_0

Section: ENGINE
OIL PUMP Ref: 01.00.57


Fig.	P/n	QTY	Name
NI - 4			
Notes: [LASER 13	301		
[21.5211.10	. ~ 1		
1	2.0312.205.2	2	screw
2	2.1480.014.1	2	washer 8
3	0.041.1135.4	1	plug 1" gas
3.2	2.1569.072.0	1	gasket 32 x 39.5 x 2
4	0.065.1565.0/10	1	pipe union
5	0.065.1567.0/10	1	filter
6	2.1539.042.0	1	special oil seal 47.35x1.78
7	0.010.9103.2	1	dipstick
8	2.1539.065.0	2	special oil seal 8.73 x 1.78
9	2.3199.001.2	2	plug 1/2" gas
10	2.1560.054.0	2	gasket 21 x 26
11	0.007.0849.0/10	1	gasket
12	0.011.0087.4	1	tube
15	2.0112.205.2	1	screw m 8 p.1.25 x 16
16	2.1470.004.2	1	lock washer 8
17	2.1539.153.0	1	oil seal 32.99x2.6
18	2.3339.307.0	2	pipe fitting m 22 p.1.5-3/4"
19	2.0112.320.2	2	screw m 10 p.1.5 x 55
20	0.010.0194.4/30	1	oil pump
			COMPONENT PARTS SEE COMPONENTS LIST
			© 0.010.0194.4/30
21	0.007.0972.0	5	shim
22	0.007.0973.0	5	shim
23	0.007.0867.0	1	bush
40	2.1310.006.2	3	flat washer 10.5x21
42	2.0112.322.2	1	screw m 10 p.1.5x65

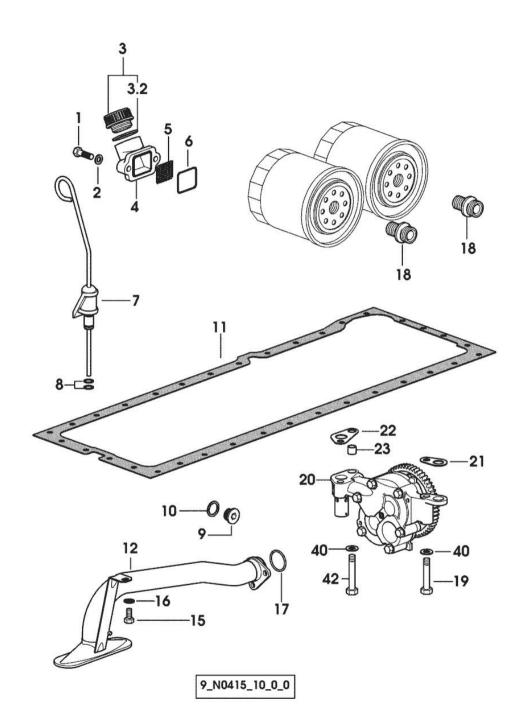

Ref: 01.00.62



Fig.	P/n	QTY	Name
Notes: [LASER 130]			
24	2.6859.086.0	2	clamp
25	0.075.1557.4	1	sediment bowl
25.1	2.0351.203.6	4	screw 3.5x9.5
25.2	0.000.0000.1		cannot be supplied
25.3	0.075.1559.0	1	gasket
25.4	0.000.0000.1		cannot be supplied
26	2.1560.008.0	1	gasket 12.2 x 18
27	2.1539.072.0	2	special oil seal 23.52 x 1.78
28	0.075.1553.0	1	bush
30	0.007.0861.0	1	tube
31	0.007.0970.0	1	tube
32	2.3339.418.1	1	pipe fitting m 12 p.1
33	2.3350.003.1	1	nosepiece 8
34	2.0312.221.2	2	screw m 8 p.1.25x75
35	2.1480.014.1	2	washer 8
36	2.1011.103.2	1	nut m 6 p.1
37	0.002.8816.0	1	small plate
38	2.1310.002.2	1	flat washer 6.4x12.5
39	2.0112.007.2	1	screw m 6 p.1 x 20
41	0.075.1453.0/10	1	tube

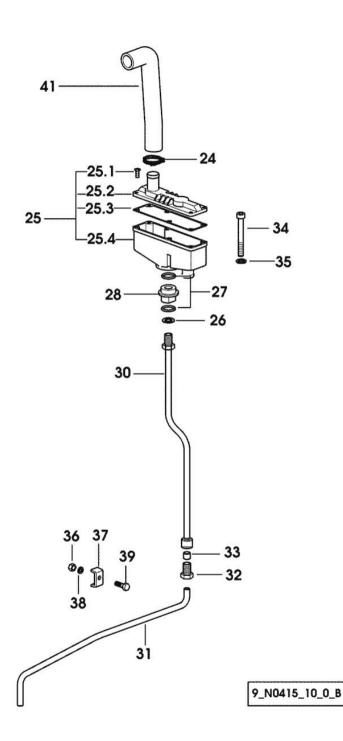


Section: ENGINE OIL FILTERS

Ref: 01.00.63



Fig.	P/n	QTY	Name
Notes: [LASER 130]			
1	2.4419.340.0	2	oil filter element

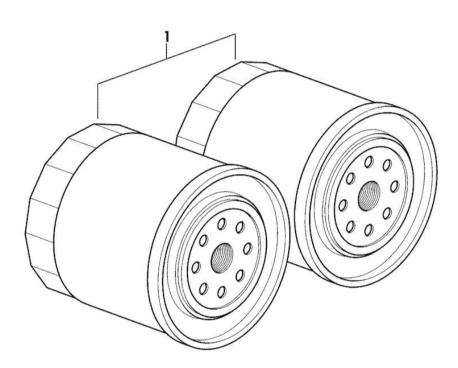


9_33815_02_0_0


Ref: 01.00.68

Section: ENGINE

RADIATOR

Fig.	P/n	QTY	Name	
Notes: [LASER 13	30]			
1	0.000.0000.1		cannot be supplied	
1.1	0.007.0703.0/20	1	box	
1.2	0.007.1239.3	1	radiator	
1.3	0.078.1555.0/10	1	plate	
1.4	0.078.1556.0/10	1	gasket	
1.5	0.078.1557.0/10	2	gasket	
1.6	2.0112.205.2	8	screw m 8 p.1.25 x 16	
1.7	2.1310.004.2	8	flat washer 8.4x17	
1.8	2.1560.014.0	1	washer 18.2 x 24	
1.9	2.3120.101.0	1	plug m 18 p.1.5	
2	2.0312.222.2	2	screw m 8 p.1.25 x 80	
3	2.0312.220.2	2	screw m 8 p.1.25x70	
4	2.1480.014.1	4	washer 8	
5	2.3249.056.2	2	pipe fitting m 28 p.2	
6	2.3350.009.1	2	nosepiece 22	
7	2.1539.048.0	1	special oil seal 20.35x1.78	
8	2.1539.050.0	1	special oil seal 69.57x1.78	

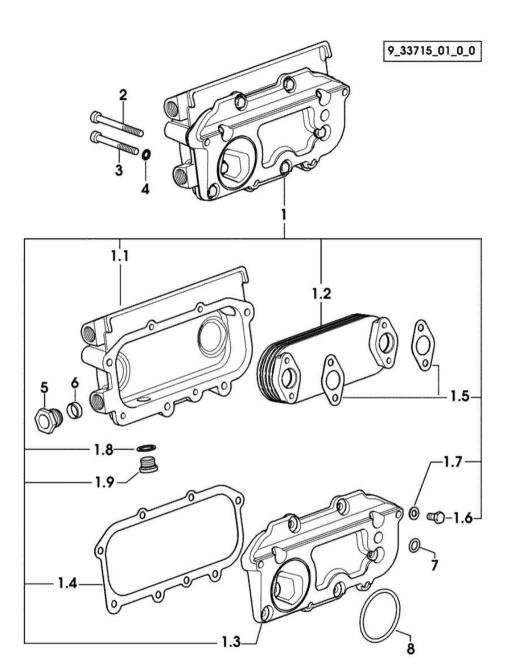

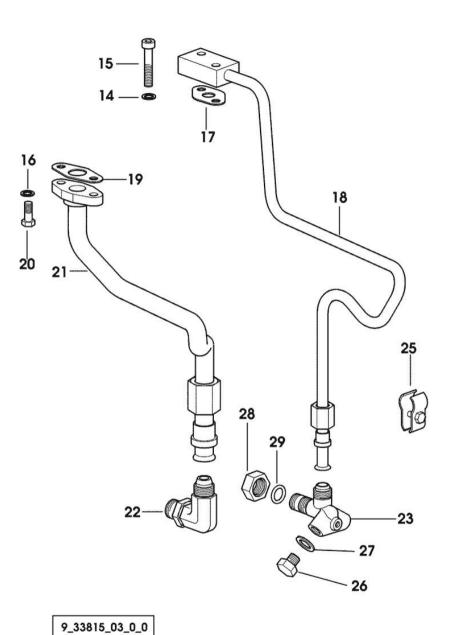

Section: ENGINE Ref: 01.00.69


OIL PIPES FOR TURBOCHARGER


Fig.	P/n	QTY	Name
Notes: [LASER 1:	30]		
14	2.1480.014.1	2	washer 8
15	2.0312.212.2	2	screw m 8 p.1.25 x 35
16	2.1470.004.2	2	lock washer 8
17	0.052.1557.0	1	gasket
18	0.010.0957.3	1	tube
19	0.052.1558.0/10	1	gasket
20	2.0112.207.2	2	screw m 8 p 1.25 x 20
21	0.010.0958.3	1	tube
22	2.3264.021.2	1	pipe fitting m 22 p.1.5 - 1" 1/16
23	2.3339.673.0/10	1	pipe fitting
25	0.007.1317.4	1	bracket
26	2.3110.403.1	1	plug m 14 p.1.5x12
27	2.1560.010.0	1	gasket 14.2 x 20
28	2.1019.129.2/10	1	nut m 18 p.1.5x12
29	2.1533.038.0	1	oil seal 15.45x2.62

Section: ENGINE Ref: 01.00.74


FUEL SUPPLY SYSTEM


Fig.	P/n	QTY	Name
Notes:			
[LASER 13	30]		
1	2.1599.454.0	6	shoulder ring 10.5x17x7.5
2	2.1011.421.2	6	nut m 10 p.1.25
3	0.011.5275.0/20	6	bracket
5	2.0112.207.2	3	screw m 8 p 1.25 x 20
6	2.1470.004.2	3	lock washer 8
7	0.000.0000.1		cannot be supplied
7.1	0.065.1693.0/30	1	support
7.2	0.065.1660.0	1	roller
7.3	2.1651.507.0	1	pin 6 x 16
7.4	2.1530.072.0	1	oil seal 26.70x1.78
11	2.4019.314.1/20	1	spring 21.5x76x1
12	0.065.1659.0	1	stop
13	0.075.1613.3/10	1	rod
15	2.4519.310.0	1	feed pump
			COMPONENT PARTS SEE COMPONENTS LIST
			© 2.4519.310.0
16	2.1011.405.2	2	nut m 8 p.1
17	2.1470.004.2	2	lock washer 8
18	2.1539.045.0	1	special oil seal 37.77x2.62
30	0.000.0000.1		cannot be supplied
30.1	0.065.1693.0/30	1	support
30.2	2.1530.072.0	1	oil seal 26.70x1.78

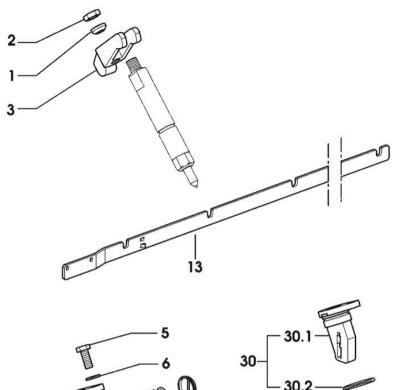

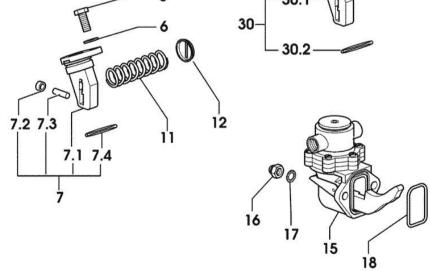

9_33616_00_0_0

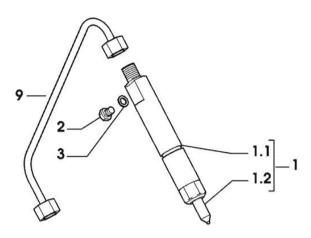

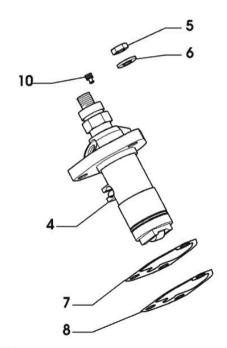

9_38316_01_0_0

LASER 130 -> 6001

Section: ENGINE Ref: 01.00.80

INJECTION PUMP - INJECTOR

Fig.	P/n	QTY	Name
Notes: [LASER 1:	30]		
1	2.4719.330.0	6	injector assembly
1.1	2.4719.190.0	1	nozzle holder BOSCH
			COMPONENT PARTS SEE COMPONENTS LIST
			© 2.4719.190.0
1.2	2.4729.180.0/10	1	nozzle
2	2.3119.024.2	6	plug m 6
3	2.1560.001.0	6	gasket 6.2x10
4	0.000.0000.1		cannot be supplied
			- FOR CODES AND DETAILS SEE REF.
			COMPONENT PARTS SEE COMPONENTS LIST
5	2.1011.405.2	18	nut m 8 p.1
6	2.1599.458.0/10	18	shoulder ring 8.4x18x2
7	0.065.1655.0/10	12	shim mm 0.1
8	0.065.1656.0/10	12	shim mm 0.20
9	0.078.1650.3	6	tube
10	2.3199.270.0	6	plug 5.9x7.8

Thank you so much for reading. Please click the "Buy Now!" button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email: ebooklibonline@outlook.com