

Section: ENGINE


Ref: 01.00.2

CRANKCASI	ŀ
-----------	---

P/n	QTY	Name
0.007.1140.6/10	1	crankcase
2.3130.001.1	11	plug 1/8" gas
2.3130.002.1	2	plug 1/4" gas
2.3130.003.1	7	plug 3/8" gas
2.1324.011.0	1	plug
2.3199.092.0	4	plug 8 x 12
2.3179.012.0	1	plug 60
0.000.0000.1		cannot be supplied
0.065.1112.7	1	support
2.1699.165.0	1	bush 12.3x15x16
0.065.1114.0/10	3	support
0.065.1116.3	1	support
2.1699.165.0	1	bush 12.3x15x16
0.065.1117.0	10	screw m 12 x 100
0.065.1141.0	1	special bushing 59X55X30
0.065.1140.0	4	special bushing 59X55X20
0.066.1151.0	1	pin
2.1539.130.0/10	4	special oil seal 117.07x3.53
2.0432.003.7	12	stud bolt m 8 p.1.25 / p.1 x 20
2.1532.072.0	1	oil seal 26.70x1.78
2.3199.405.2	1	plug m 28 p.1.5
0.066.1152.0/10	4	gasket
	0.007.1140.6/10 2.3130.001.1 2.3130.002.1 2.3130.003.1 2.1324.011.0 2.3199.092.0 2.3179.012.0 0.000.0000.1 0.065.1112.7 2.1699.165.0 0.065.1114.0/10 0.065.1117.0 0.065.1114.0 0.065.1141.0 0.065.1141.0 2.1539.130.0/10 2.0432.003.7 2.1532.072.0 2.3199.405.2	0.007.1140.6/10 1 2.3130.001.1 11 2.3130.002.1 2 2.3130.003.1 7 2.1324.011.0 1 2.3199.092.0 4 2.3179.012.0 1 0.000.0000.1 0.065.1112.7 1 2.1699.165.0 1 0.065.1114.0/10 3 0.065.1116.3 1 2.1699.165.0 1 0.065.1141.0 1 0.065.1141.0 1 0.066.1151.0 1 2.1539.130.0/10 4 2.0432.003.7 12 2.1532.072.0 1 2.3199.405.2 1



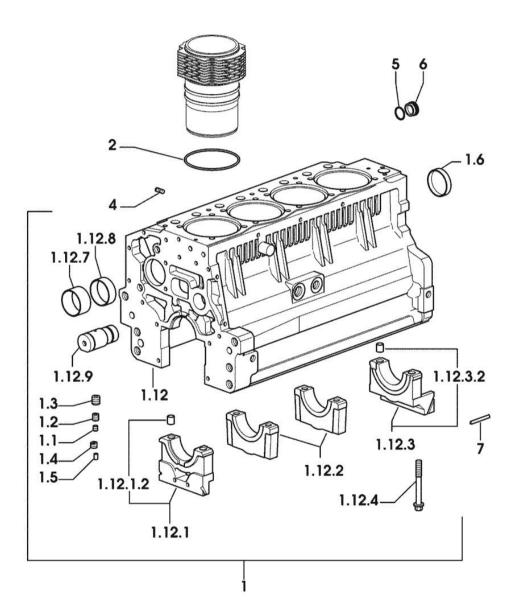

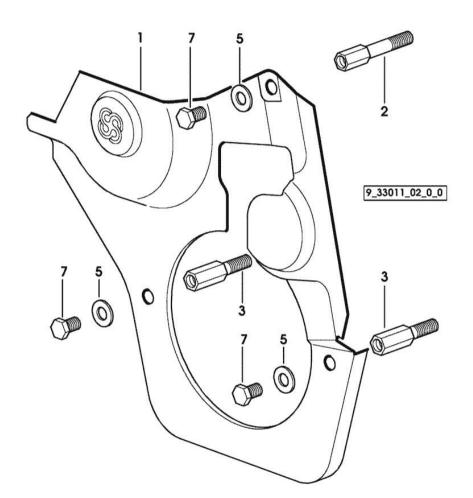


Section: ENGINE

Ref: 01.00.5

# **GUARD PLATE**

Fig.	P/n	QTY	Name
Notes: [ROCK 70 M]			
1	0.007.1262.3/50	1	guard
2	0.007.1271.0/10	1	small column m $8 \text{ p.1.25 / L} = \text{mm } 60$
3	0.007.1272.0/10	2	small column m 8 p.1.25 / $L = mm 50$
5	2.1310.004.2	3	flat washer 8.4x17
7	2.0112.203.2	3	screw m 8 p.1.25 x 12

9\_33211\_00\_0\_B

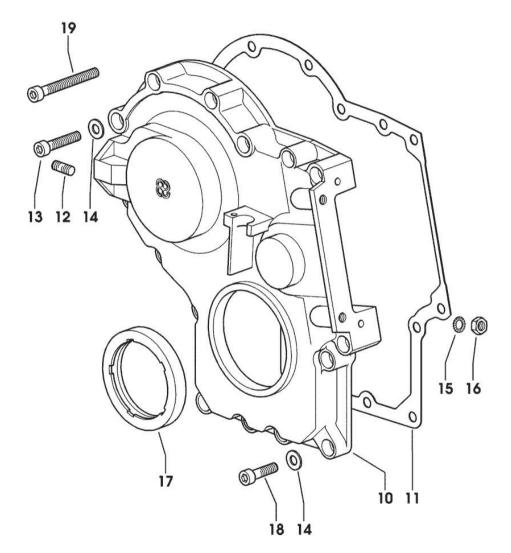


#### ROCK 70 M

Section: ENGINE

TIMING CASE

Ref: 01.00.9

Fig.	P/n	QTY	Name	
Notes: [ROCK 70 N	M]			
10	0.013.4981.0	1	guard -> 1156 X ROCK 70	
10	0.065.1132.0/50	1	guard 1155 <- X ROCK 70	
11	0.065.1150.0/30	1	gasket	
12	2.0432.003.7	2	stud bolt m 8 p.1.25 / p.1 x 20	
13	2.0312.214.2	3	screw m 8 p.1.25 x 40	
14	2.1480.014.1	15	washer 8	
15	2.1470.004.2	4	lock washer 8	
16	2.1011.405.2	2	nut m 8 p.1	
17	2.1529.141.0	1	special oil seal	
18	2.0312.208.2	8	screw m 8 p.1.25 x 25	
19	2.0312.219.2	4	screw m 8 p.1.25x65	

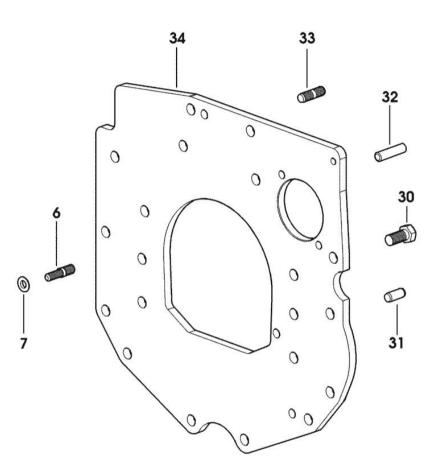

9\_33311\_02\_0\_0

# ROCK 70 M

Section: ENGINE Ref: 01.00.10

# CRANKCASE


Fig.	P/n	QTY	Name
Notes: [ROCK 70 M]			
6	2.0439.250.7	1	stud bolt m 12 / m 10 x 30
7	0.011.9294.0/10	1	bush
30	2.0112.511.2	8	screw m 14 p.2 x 30
31	2.1651.912.0	2	cylindrical plug 12x28
32	2.1651.917.0	1	cylindrical plug 12x40
33	2.0432.257.7	1	stud bolt m 12 p.1.75 - 1.25 x 30
34	0.007.9745.0/10	1	flange

Section: ENGINE

Ref: 01.00.13

# SIDE PLUG FOR CYLINDER BLOCK

Fig.	P/n	QTY	Name
Notes: [ROCK 70 M]			
22 23	2.1560.017.0 2.3120.002.4	1 1	gasket 22.2 x 27 plug m 22 x 1.5

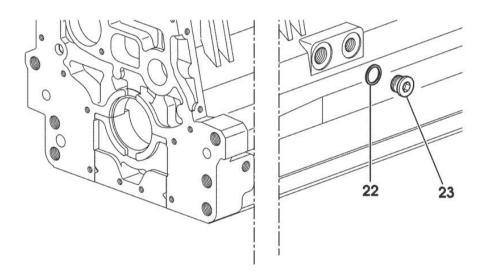


9\_33211\_07\_0\_0

Section: ENGINE Ref: 01.00.17

# CRANKSHAFT

Fig.	P/n	QTY	Name	
Notes: [ROCK 70	) M]			
1	2.1720.006.0	1	key 4x6.5	
2	0.086.1210.3/30	1	crankshaft	
2.1	0.065.1211.0/10	1	crown wheel	
2.3	2.1630.608.0	1	pin 6x16	
3	2.1651.915.0	1	pin 12x35	
4	0.065.1215.0	5	main half bushing STANDARD	
4	0.065.1215.7		main half bushing - mm 0.25	
4	0.065.1215.8		main half bushing - mm 0.50	
5	0.065.1216.0	5	main half bushing	
5	0.065.1216.7		main half bushing - mm 0.25	
5	0.065.1216.8		main half bushing - mm 0.50	
6	0.065.1218.0	4	shim STANDARD	
6	0.065.1218.7		shim + mm 0.10	
6	0.065.1218.8		shim + mm 0.15	
8	2.1599.524.7	1	washer 21x60x12	
9	2.1589.189.0	2	shoulder ring mm 1.00	
11	2.1529.073.0	1	special oil seal 110x130x13	
14	0.065.1254.0/20	1	gasket	
15	0.007.1711.0/10	1	cover	
16	2.1475.002.2	9	conical washer 8	
17	2.0112.207.2	9	screw m 8 p 1.25 x 20	
18	2.3130.001.1	4	plug 1/8" gas	

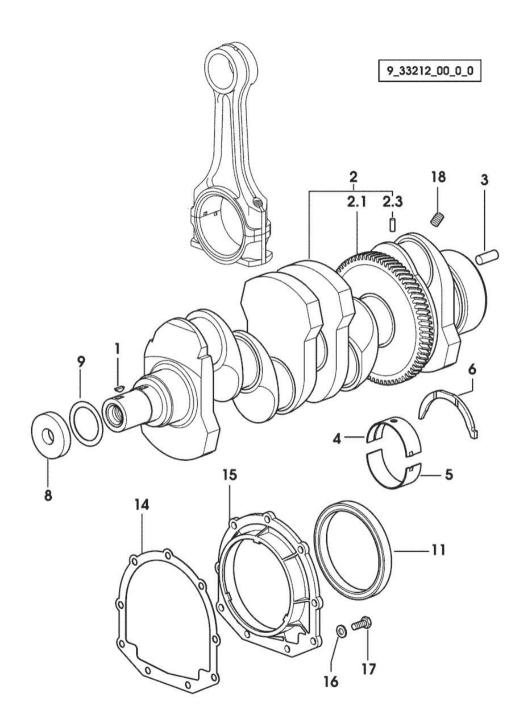

- 3.1

1,2

1.2.1

-1.2.3-

-1.2.2

9\_38712\_02\_0\_B

#### ROCK 70 M

Section: ENGINE Ref: 01.00.22

# CYLINDER - PISTON - CONNECTING ROD

Fig.	P/n	QTY	Name
Notes:			
71504 <= 3	X ROCK 70 [ROCK 70 M]		
1	0.336.0065.A	4	cyl. piston assembly "A" - CLASS A
1	0.336.0065.B	4	cyl. piston assembly "B" - CLASS B
1.1	0.A13.0355.0	1	engine cylinder "A" - CLASS A
1.1	0.B13.0355.0	1	engine cylinder "B" - CLASS B
1.2	0.086.0060.A	1	complete piston "A" - CLASS A
1.2	0.086.0060.B	1	complete piston "B" - CLASS B
1.2.1	0.086.0052.6/10	1	piston ring set
1.2.2	2.1411.014.1	2	circlip 35
1.2.3	0.078.1236.0	1	piston pin Ø $18 / Ø 35 / L = mm 86$
2	0.065.1225.0	8	con.rod half bushing STANDARD - $A = 28.75 \rightarrow 29.00$
2	0.065.1225.7	8	con.rod half bushing - mm 0.25
2	0.065.1225.8	8	con.rod half bushing - mm 0.50
3	0.078.1220.3/30	4	engine connecting rod
3.1	2.0399.213.0	2	screw m 12 p.1.25x61.5
3.2	2.1559.114.0/10	1	special bushing

- 3.1

1,2

1.2.1

-1.2.3-

-1.2.2

9\_38712\_02\_0\_A

#### ROCK 70 M

Section: ENGINE Ref: 01.00.25

### CYLINDER - PISTON - CONNECTING ROD


Fig.	P/n	QTY	Name
<b>Notes:</b> => 71505 X	K ROCK 70 [ROCK 70 M]		
1	0.379.0065.A	4	cyl. piston assembly "A" - CLASS A
1	0.379.0065.B	4	cyl. piston assembly "B" - CLASS B
1.1	0.A13.0355.0	1	engine cylinder "A" - CLASS A
1.1	0.B13.0355.0	1	engine cylinder "B" - CLASS B
1.2	0.379.0060.A	1	complete piston "A" - CLASS A
1.2	0.379.0060.B	1	complete piston "B" - CLASS B
1.2.1	0.086.0052.6/10	1	piston ring set
1.2.2	2.1411.014.1	2	circlip 35
1.2.3	0.078.1236.0	1	piston pin Ø $18 / Ø 35 / L = mm 86$
2	0.065.1225.0	8	con.rod half bushing STANDARD - $A = 28.75 -> 29.00$
2	0.065.1225.7	8	con.rod half bushing - mm 0.25
2	0.065.1225.8	8	con.rod half bushing - mm 0.50
3	0.078.1220.3/30	4	engine connecting rod
3.1	2.0399.213.0	2	screw m 12 p.1.25x61.5
3.2	2.1559.114.0/10	1	special bushing

Section: ENGINE


Ref: 01.00.29

# ENGINE FLYWHEEL

Fig.	P/n	QTY	Name	
Notes: [ROCK 70 M]				
1	0.007.9562.3/10	1	flywheel	
1.2	0.065.1242.0	1	crown wheel $Z = 123$	
2	2.0119.174.0/10	6	screw m 12 p.1.25x45	
3	2.2041.008.0	1	ball bearing 20x47x14	

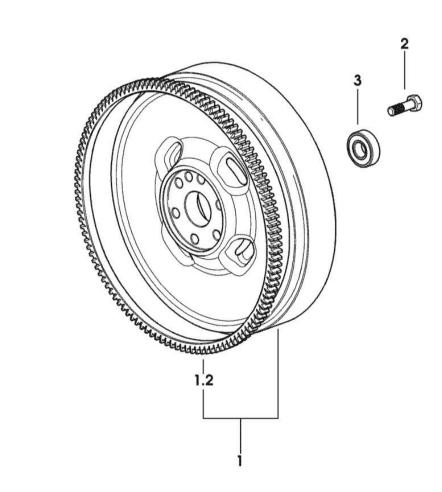

9\_33312\_03\_0\_0

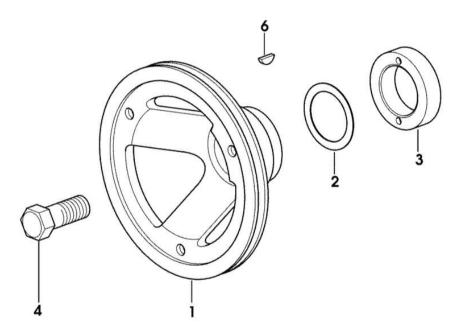

9\_33012\_02\_0\_0

### ROCK 70 M

Section: ENGINE Ref: 01.00.30


### CRANKSHAFT PULLEY


Fig.	P/n	QTY	Name
Notes: [ROCK 70 M]			
1	0.007.1330.0/40	1	pulley
2	2.1589.189.0	2	shoulder ring mm 1.00
3	0.085.1248.0/20	1	hub
4	2.0399.144.7/10	1	screw m 20 p.1.5x51
6	2.1720.006.0	1	key 4x6.5

Section: ENGINE Ref: 01.00.33

### **COUNTERWEIGHTS**

Fig.	P/n	QTY	Name	
Notes:	M			
[ROCK 70 N	VIJ			
25	2.1589.139.0	1	shoulder ring mm 0.3	
26	2.1589.140.0	3	shoulder ring mm 0.1	
29	2.1579.628.0	3	spacer 16.5x26x0.1	
33	2.1579.629.0	6	spacer 12.5x26x0.1	
34	2.1589.048.0	1	shoulder ring 16.5x26x0.3	
35	2.1589.049.0	1	shoulder ring 12.5x26x0.3	
40	0.086.1233.3/30	1	mass sx/lh/li	
40.2	2.1559.115.0	2	special bushing 26x30x30	
40.3	0.000.0000.1		cannot be supplied	
40.4	2.1651.302.0	1	roll pin 4x6	
41	0.065.1233.3/30	1	mass dx/rh/re	
41.2	2.1559.115.0	2	special bushing 26x30x30	
41.3	0.000.0000.1		cannot be supplied	
41.99	0.000.0000.1		cannot be supplied	
41.99.4	2.1651.302.0	1	roll pin 4x6	
41.99.5	2.1410.018.1	1	circlip 45	
42	0.000.0000.1		cannot be supplied	
42.1	0.086.1231.0/10	1	box	
42.2	2.3130.001.1	4	plug 1/8" gas	
43	2.1631.717.0	2	roll pin 8 x 40	
44	2.1579.626.0	2	spacer 13.2x16x11	
45	2.0139.028.2	4	screw m 12	
46	2.1699.191.0	1	bush 7x10x16	
47	0.000.0000.1		cannot be supplied	
47.1	0.065.1234.0/10	1	shaft	
47.2	2.3130.001.1	1	plug 1/8" gas	
48	2.1589.185.0	4	shoulder ring 26.1x34x1	

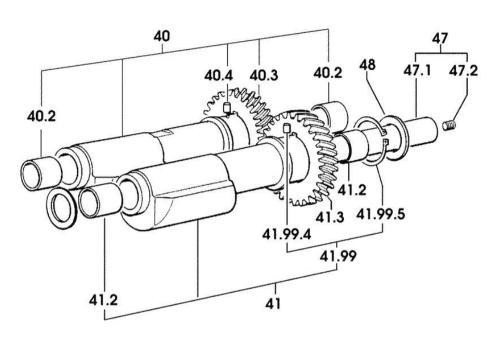

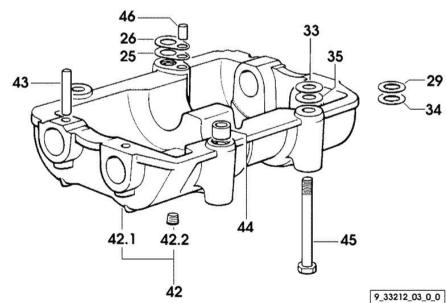


Section: ENGINE Ref: 01.00.38

CAMSHAFT

E:- P/n

Fig.	P/n	QTY	Name
Notes:			
	X ROCK 70 [ROCK 70 M]		
1	0.065.1331.2	8	rod
2	2.1569.114.0/10	16	gasket 14x18.5x8
3	0.065.1332.0	8	sleeve
4	2.4019.300.1/10	8	spring 18.5x52x2
5	2.1599.437.0	8	shoulder ring
6	0.065.1330.0	8	tappets
7	0.013.5017.0	1	gear z=58
8	2.0132.207.2	4	screw m 10 p.1 x 25
9	0.066.1310.3/40	1	camshaft
9.2	0.065.1324.0/10	1	gear Z = 32
10	0.065.1350.0	1	small disc
11	2.1410.016.1	1	circlip 40
12	0.065.1352.0	1	shim
13	0.065.1351.0	2	shoulder ring
14	0.065.1323.0/30	1	gear Z = 29
16	2.0312.205.2	2	screw
17	2.1480.014.1	2	washer 8
18	0.065.1353.0	1	small plate
19	0.007.1177.3/20		gear z = 57
			- WITH RED IDENTIFICATION STAMP
19.2	2.1559.185.0/10	1	bushing
20	0.007.1178.3/20		gear z = 57
			- WITH YELLOW IDENTIFICATION STAMP
20.2	2.1559.185.0/10	1	bushing
21	0.007.1179.3/20		gear z = 57
			- WITH GREEN IDENTIFICATION STAMP
21.2	2.1559.185.0/10	1	bushing
22	2.1559.398.0	1	bushing 10.5x13x12

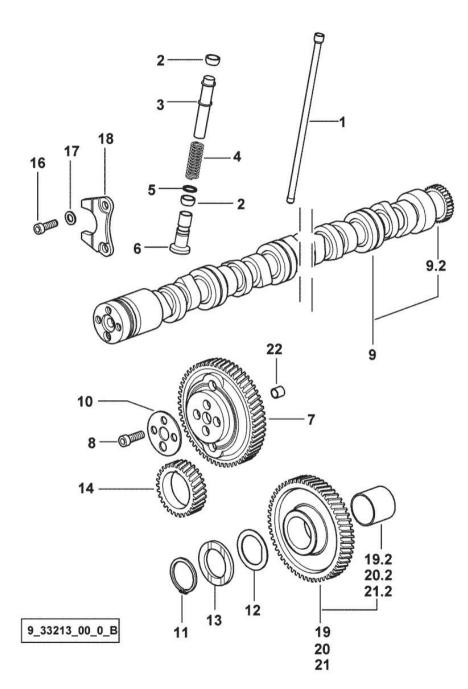


Section: ENGINE

Ref: 01.00.41




Fig.	P/n	QTY	Name
<b>B</b> T .			
<b>Notes:</b> => 71505 X	Z DOCK 70 IDOCK 70 MI	ī	
-> /1303 A	K ROCK 70 [ROCK 70 M]		
1	0.065.1331.2	8	rod
2	2.1569.114.0/10	16	gasket 14x18.5x8
3	0.065.1332.0	8	sleeve
4	2.4019.300.1/10	8	spring 18.5x52x2
5	2.1599.437.0	8	shoulder ring
6	0.065.1330.0	8	tappets
7	0.013.5017.0	1	gear z=58
8	2.0132.207.2	4	screw m 10 p.1 x 25
9	0.007.1712.3/10	1	camshaft
9.2	0.065.1324.0/10	1	gear Z = 32
10	0.065.1350.0	1	small disc
11	2.1410.016.1	1	circlip 40
12	0.065.1352.0	1	shim
13	0.065.1351.0	2	shoulder ring
14	0.065.1323.0/30	1	gear Z = 29
16	2.0312.205.2	2	screw
17	2.1480.014.1	2	washer 8
18	0.065.1353.0	1	small plate
19	0.007.1177.3/20		gear z = 57
			- WITH RED IDENTIFICATION STAMP
19.2	2.1559.185.0/10	1	bushing
20	0.007.1178.3/20		gear z = 57
			- WITH YELLOW IDENTIFICATION STAMP
20.2	2.1559.185.0/10	1	bushing
21	0.007.1179.3/20		gear z = 57
			- WITH GREEN IDENTIFICATION STAMP
21.2	2.1559.185.0/10	1	bushing
22	2.1559.398.0	1	bushing 10.5x13x12

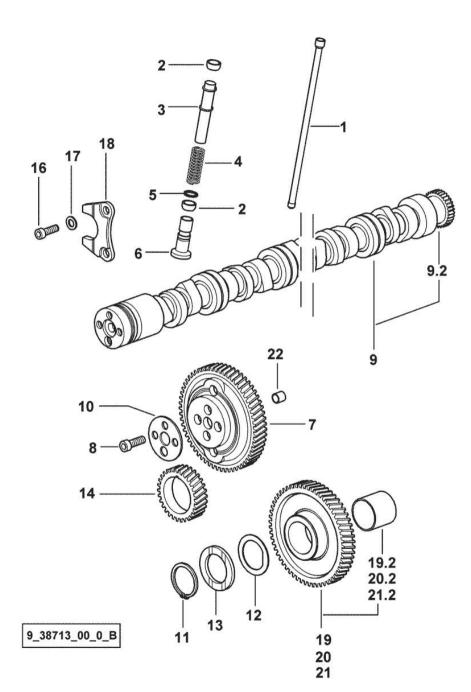

Section: ENGINE Ref: 01.00.45

### CYLINDER HEAD

Fig.	P/n	QTY	Name
<b>Notes:</b> [ROCK 70 M	ŋ		
1	2.0399.130.2/10	4	screw m 8x36x44 1328 <- X ROCK 70
1	2.0399.288.2/10	4	screw m 8x36x46 -> 1329 X ROCK 70
2	2.1539.151.0	4	special oil seal 9.19 x 2.62 -> 1329 X ROCK 70
2	2.1569.170.0/10	4	gasket 8.2 x 14 1328 <- X ROCK 70
3	0.007.1139.0/10	4	small cap
4	0.065.1450.0/30	1	tappet gasket
7	2.1011.421.2	8	nut m 10 p.1.25
8	2.0432.163.7	8	stud bolt m 10 p.1.5 / p.1.25 x 45
11	0.000.0000.1		cannot be supplied
11.1	0.066.1431.0	1	pin
11.2	0.021.1434.0	2	screw
11.10	0.000.0000.1		cannot be supplied
11.10.3	2.1011.405.2	2	nut m 8 p.1
11.10.4	0.066.1432.3	2	rocker arm
11.10.4.2	2.1559.021.0/40	1	bushing 15x19x22
11.10.5	2.1410.055.7	2	circlip 19
11.10.6	0.000.0000.1		cannot be supplied
11.10.6.2	0.066.1430.0/10	1	support
11.10.7	2.1599.432.0	2	shoulder ring
13	0.074.1423.0	16	conical valve cotter
14	0.066.1425.0	8	cup
15	2.0432.161.7	4	stud bolt m 10 p.1.5 / p.1.25 x 40
16	0.007.1122.0/10	4	bush $L = mm 6.4$
17	0.065.1443.0/20	16	screw
18	0.007.1110.3/60	4	engine head
18.1	0.007.1779.0/20	2	valve guide
18.3	0.066.1427.0	1	valve seat
18.4	0.078.1426.0	1	valve seat
22	0.085.1450.0/10	_	head gasket mm 0.50
23	0.085.1451.0/10	3	head gasket mm 0.7
24	0.085.1452.0/10	1	head gasket mm 1.0
25	0.085.1453.0/10	3	head gasket mm 0.8
26	0.013.4598.0	3	head gasket mm 1.3
30	2.1519.117.0	8	special oil seal

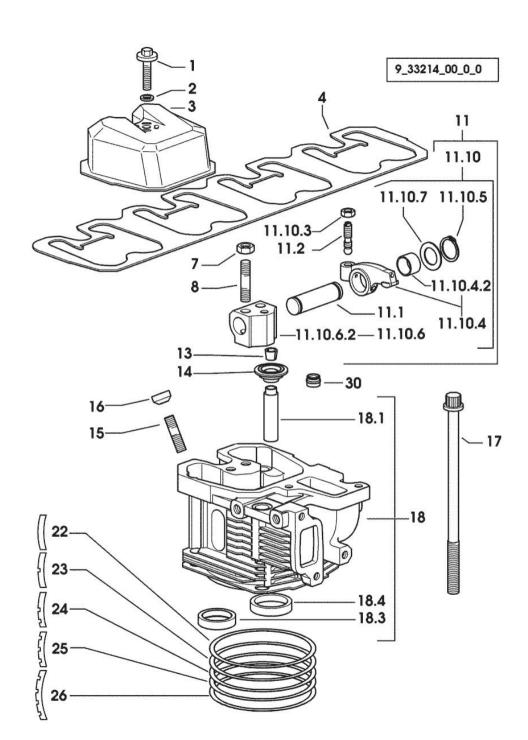

Thank you so much for reading.

Please click the "Buy Now!"

button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email: ebooklibonline@outlook.com