
Ref: B0.00.3 (1)

#### Section: B0 - ENGINE LIGHT ENGINE Fig. P/n QTY Name

1

Notes: [XA 85 -> ZKDCW40200TH10001]

1 I6.IF701.00.0 engine ON ORDERING PLEASE ENGINE NO. REQUIRED

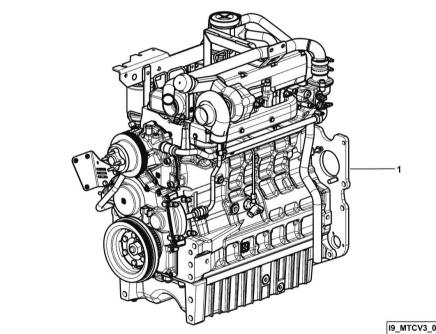

I9\_MTCV3\_00\_M-A-001

## Ref: B0.01.1 (1)

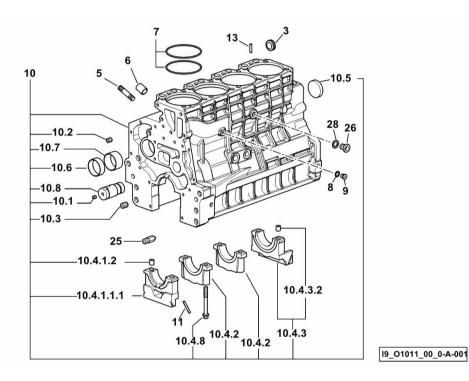


Fig.	P/n	QTY	Name
N. 4			
Notes: $1\times 85 > 71$	KDCW40200TH10001]		
[AA 05 ZI	XDC w402001H10001]		
3	2.3199.312.2/20	1	plug m 35x1.5x9.5
5	2.0439.279.7	8	stud bolt m 8 p.1 x 25
6	2.1559.188.2	4	bush 11.4 x 14 x16
7	2.1539.259.0	8	special oil seal 107.62x2.62
8	2.1560.010.0	1	gasket 14.2 x 20
9	2.3199.292.0	1	plug 1/4" gas
10	0.014.9655.4/30	1	crankcase
10.1	2.3130.001.1	14	plug 1/8" gas
10.2	2.3130.002.1	4	plug 1/4" gas
10.3	2.3130.003.1	6	plug 3/8" gas
10.4.1.1.1	0.065.1112.7/10	1	support
10.4.1.2	2.1699.165.0	1	bush 12.3x15x16
10.4.2	0.065.1114.0/10	3	support
10.4.3	0.065.1116.3	1	support
10.4.3.2	2.1699.165.0	1	bush 12.3x15x16
10.4.8	0.065.1117.0	10	screw m 12 x 100
10.5	2.3179.012.0	1	plug 60
10.6	0.065.1140.0	4	special bushing 59X55X20
10.7	0.065.1141.0	1	special bushing 59X55X30
10.8	0.014.1340.0/10	1	pin mm 85
11	0.066.1152.0/10	4	gasket
13	2.1549.154.2	4	bush 4.8x5.8x16
25	0.013.4946.0/10	1	sprayer nozzle
26	2.3120.101.0	1	plug m 18 p.1.5
28	2.1560.014.0	1	washer 18.2 x 24

Section: B0 - ENGINE


CRANKCASE

1/1

Ref: B0.01.2 (1)

## MONOBLOC ENGINE-GEARBOX CONNECTING FLANGE

Fig.	P/n	QTY	Name
Notes:	727003240200711100011		
[AA 83 ->	· ZKDCW40200TH10001]		
1	0.007.7752.0/30	1	flange
2	2.0112.511.2	8	screw m 14 p.2 x 30
3	2.1651.912.0	2	cylindrical plug 12x28
4	2.1651.917.0	1	cylindrical plug 12x40
5	2.0432.257.7	1	stud bolt m 12 p.1.75 - 1.25 x 30
6	2.0439.250.7	1	stud bolt m $12^{7}$ m $10 \ge 30$
7	0.011.9294.0/10	1	bush

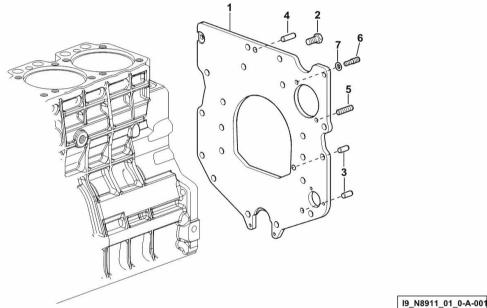

Section: B0 - ENGINE

	•	sere a minipiz a co
2.1651.912.0	2	cylindrical plug 12x28
2.1651.917.0	1	cylindrical plug 12x40
2.0432.257.7	1	stud bolt m 12 p.1.75 - 1.25
2.0439.250.7	1	stud bolt m $12/m$ 10 x 30
0.011.9294.0/10	1	bush

Ref: B0.01.3 (1)

### LOWER PLUG FOR CYLINDER BLOCKS


Fig.	P/n	QTY	Name

#### Notes:

[XA 85 -> ZKDCW40200TH10001]

Section: B0 - ENGINE

1 2.3130.003.1 2 plug 3/8" gas

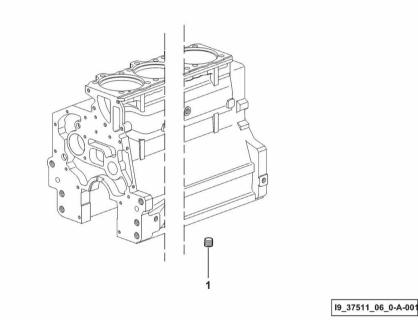


Ref: B0.01.4 (1)

## SIDE PLUG FOR CYLINDER BLOCK

Section: B0 - ENGINE

Fig.	P/n	QTY	Name
	·		
Notes:			
[XA 85 -> ZK	DCW40200TH10001]		

22	2.1560.017.0	1	gasket 22.2 x 27
23	2.3120.002.4	1	plug m 22 x 1.5

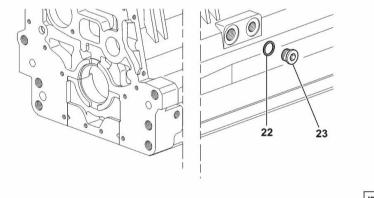

I9\_33211\_07\_0-A-001


Ref: B0.01.5 (1)

## ENGINE OIL AND TURBO PRESSURE SWITCH UNION

Fig.	P/n	QTY	Name
Notes: [XA 85 ->	ZKDCW40200TH10001]		
10	2.3339.787.0/10	1	pipe fitting 7/16"

11	2.3110.403.1	1	plug m 14 p.1.5x12
13	2.1019.129.2/10	1	nut m 18 p.1.5x12
14	2.1533.038.0	1	oil seal 15.45x2.62
15	2.1560.010.0	2	gasket 14.2 x 20

Section: B0 - ENGINE

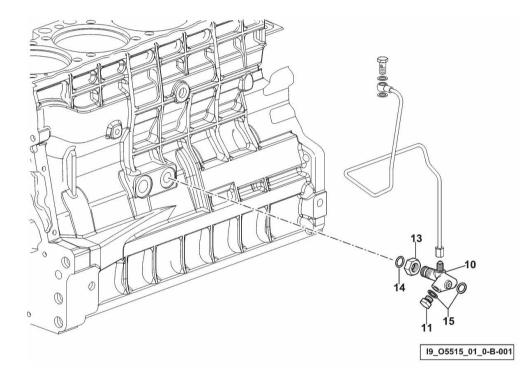

Ref: B0.02.3 (1)


## Section: B0 - ENGINE ENGINE FLYWHEEL

Fig.	P/n	QTY	Name

# Notes: [XA 95] > 7KDCW40

[XA 85 -> ZKDCW40200TH10001]


1	0.014.2693.3	1	flywheel
1.2	0.065.1242.0	1	crown wheel $Z = 123$
2	2.0139.036.2	6	screw m 12 p.1.25 x 35

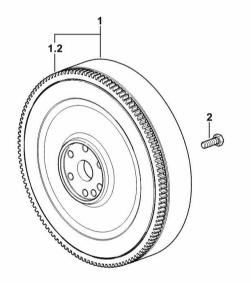

9\_N1312\_02\_0-A-001

Name

## Ref: B0.02.6 (2)

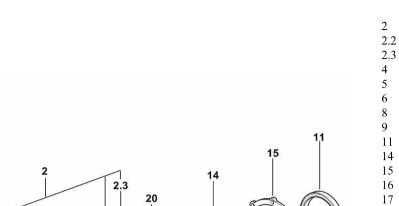

THOLES.			
[XA 85 ->	ZKDCW40200TH10001]		
2	0.021.8246.3	1	crankshaft
2.2	0.065.1211.0/10	1	crown wheel
2.3	2.1630.608.0	1	pin 6x16
4	0.019.5455.0	5	main half bushing STANDARD
5	0.019.5456.0	5	main half bushing STANDARD
6	0.065.1218.0	4	shim STANDARD
8	2.1599.524.7	1	washer 21x60x12
9	2.1589.189.0	2	shoulder ring mm 1.00
11	2.1529.073.0	1	special oil seal 110x130x13
14	0.065.1254.0/20	1	gasket
15	0.007.1711.0/10	1	cover
16	2.1475.002.2	9	conical washer 8
17	2.0112.207.2	9	screw m 8 p 1.25 x 20
18	2.1720.006.0	1	key 4x6.5
19	0.065.1323.0/30	1	gear Z = 29
20	2.1651.915.0	1	pin 12x35
601	0.065.1218.7		$shim + mm \ 0.10$
602	0.065.1218.8		$shim + mm \ 0.15$


ΟΤΥ

Section: B0 - ENGINE CRANKSHAFT

P/n

Fig.

Notes:

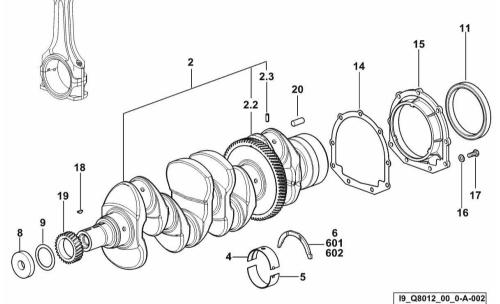

Ref: B0.02.7 (1)

## ENGINE CRANKSHAFT PULLEY WITH RING-FEEDER RINGS

Fig.	P/n	QTY	Name
Notes:			
[XA 85 ->	ZKDCW40200TH10001]		
1	0.015.6055.0	1	pulley
2	0.011.3515.0/20	1	hub $Z = 48$
3	0.065.1256.0	2	ring 45x52
4	2.1579.865.0	1	spacer 45.2x51.8x10
~	2.0439.195.7	1	stud bolt m 20 p.1.5x80




Section: B0 - ENGINE

6

7

8

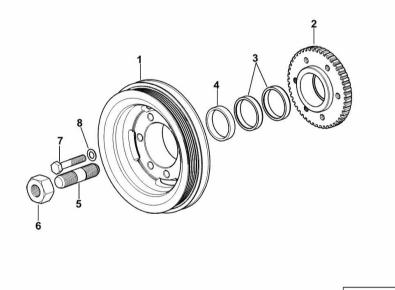

I9\_06312\_03\_0-A-001

Ref: B0.02.9 (1)

## **COOLANT PUMP DRIVEBELT**


Section: B0 - ENGINE

Fig. P/n QTY Name

Notes:

- FOR TYPES WITHOUT CONDITIONING [XA 85 -> ZKDCW40200TH10001]

1 2.4119.214.0 1 belt PV-K5 (mm 17.4x1245)

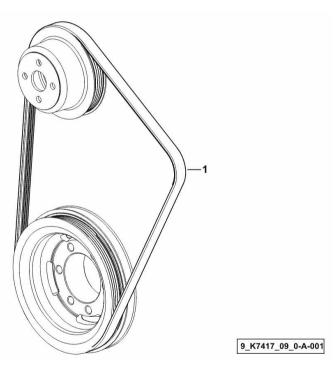

Ref: B0.02.10 (1)

### COOLANT PUMP AND ALTERNATOR DRIVEBELT


Fig.	P/n	QTY	Name

Notes:

Section: B0 - ENGINE

- FOR MODELS WITH COMPRESSOR [XA 85 -> ZKDCW40200TH10001]

1	2.4119.143.0	1	belt AV 12.7x1225 mm
2	2.4119.214.0	1	belt PV-K5 ( mm 17.4x1245 )

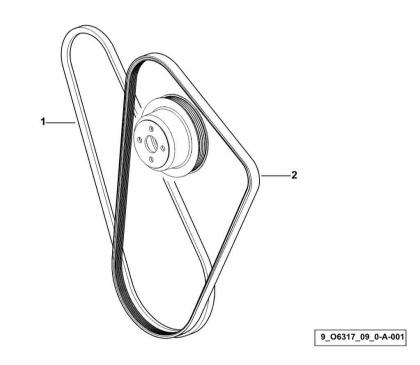

Name

#### Section: B0 - ENGINE COUNTERWEIGHTS

P/n

[XA 85 -> ZKDCW40200TH10001]

Fig.

Notes:

Ref: B0.02.12 (1)

#### 38.2.2 38.2.4 38.3 38,2 38.3.5 38.4.2 38.3.2 38.3.4 1 38.2.2 38.4.1 38.6 38.7 38.3.2 38.6 35 25 00 -29 0 38.5-38.1.1 45 38.1.2 6-I9\_33212\_03\_0-A-001

25	2.1589.139.0	1	shoulder ring mm 0.3
26	2.1589.140.0	3	shoulder ring mm 0.1
29	2.1579.628.0	3	spacer 16.5x26x0.1
33	2.1579.629.0	6	spacer 12.5x26x0.1
34	2.1589.048.0	1	shoulder ring 16.5x26x0.3
35	2.1589.049.0	1	shoulder ring 12.5x26x0.3
38.1.1	0.086.1231.0/10	1	box
38.1.2	2.3130.001.1	4	plug 1/8" gas
38.2	0.086.1233.3/30	1	mass sx/lh/li
38.2.2	2.1559.115.0	2	special bushing 26x30x30
38.2.4	2.1651.302.0	1	roll pin 4x6
38.3	0.065.1233.3/30	1	mass dx/rh/re
38.3.2	2.1559.115.0	2	special bushing 26x30x30
38.3.4	2.1651.302.0	1	roll pin 4x6
38.3.5	2.1410.018.1	1	circlip 45
38.4.1	0.065.1234.0/10	1	shaft
38.4.2	2.3130.001.1	1	plug 1/8" gas
38.5	2.1631.717.0	2	roll pin 8 x 40
38.6	2.1589.185.0	4	shoulder ring 26.1x34x1
38.7	2.0522.212.7	1	screw m 8 p.1.25 x 30
44	2.1579.626.0	2	spacer 13.2x16x11
45	2.0139.028.2	4	screw m 12
46	2.1699.191.0	1	bush 7x10x16

ΟΤΥ

1/1

Ref: B0.03.1 (1)

### **CYLINDER - PISTON - CONNECTING ROD**


]	Fig.	P/n	QTY	Name
_				

#### Notes:

Section: B0 - ENGINE

[XA 85 -> ZKDCW40200TH10001] 10002 <-


	1	0.068.0065.A	4	cyl. piston assembly "A"	
	1	0.068.0065.B	4	() <= - CLASS A cyl. piston assembly "B"	
	T	0.000.0005.D	7	$() \leq - CLASS B$	
	1	0.Q92.0065.A	4	cyl. piston assembly "A"	
				=> () - CLASS A	
	1	0.Q92.0065.B	4	cyl. piston assembly "B"	
mm 15				=> () - CLASS B	
= = = mm 7	1.2	0.A12.2675.0	1	engine cylinder "A"	
				- CLASS A	
	1.2	0.B12.2675.0	1	engine cylinder "B"	
				- CLASS B	
	1.3	0.068.0060.A	1	complete piston "A"	
-				() <= - CLASS A	
	1.3	0.068.0060.B	1	complete piston "B"	
	1.0	0.000.00(0.)		() <= - CLASS B	
	1.3	0.Q92.0060.A	1	complete piston "A"	
	1.2	0.00 <b>2</b> .00(0.D	1	=> () - CLASS A	
	1.3	0.Q92.0060.B	1	complete piston "B" $\rightarrow$ ( ) CLASS P	
= _mm 8.5 mm 13.5	1.3.1	0.081.0090.6/10	1	=> () - CLASS B piston ring set	
	1.3.1	0.081.0090.0/10	1	() <=	
	1.3.1	0.Q92.0052.6	1	piston ring set	
	1.5.1	0.Q92.0032.0	1	=> ()	
	1.3.2	2.1411.014.1	2	circlip 35	
	1.3.3	0.078.1236.0	1	piston pin Ø 18 / Ø 35 / L = mm 86	
	2	0.014.5175.3	4	engine connecting rod	
I9_Q7912_01_M-A-001				() <=	
	2	0.019.2226.3/10	4	engine connecting rod	
				=> ()	
	2.1	2.1559.255.0	1	special bushing 34.60x39.130x34.65	
				() <=	
	2.1	2.1559.532.0	1	special bushing 34.60x39.130x36.65	
				=>()	
	2.2	2.0399.213.0	2	screw m 12 p.1.25x61.5	
				() <=	
	2.2	2.0399.365.0	2	screw m 10 p.1.25x61.5	
	2	0.065.1005.0	0	=>()	
	3	0.065.1225.0	8	con.rod half bushing STANDARD - $A = 28.75 \rightarrow 29.00$	
	3	0.065.1225.7	8	() <= con.rod half bushing - mm 0.25	1/2
	3	0.003.1223.7	0	controu nan busining - min 0.23	

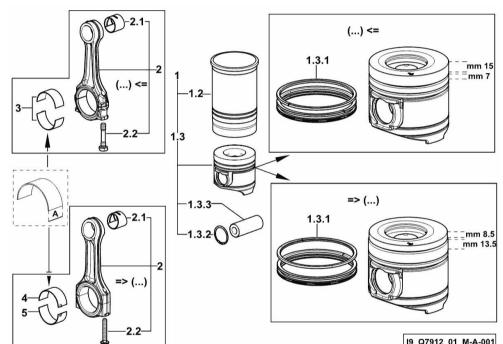

Ref: B0.03.1 (1)

#### Section: B0 - ENGINE CYLINDER - PISTON - CONNECTING ROD

Fig.	P/n	QTY	Name
			() <=
3	0.065.1225.8	8	con.rod half bushing - mm 0.50
			() <=
4	0.019.5453.0	4	con.rod half bushing STANDARD - $A = 29.85 \rightarrow 30.10$
			=> ()
5	0.019.5454.0	4	con.rod half bushing STANDARD - $A = 29.85 \rightarrow 30.10$
0		·	=>()

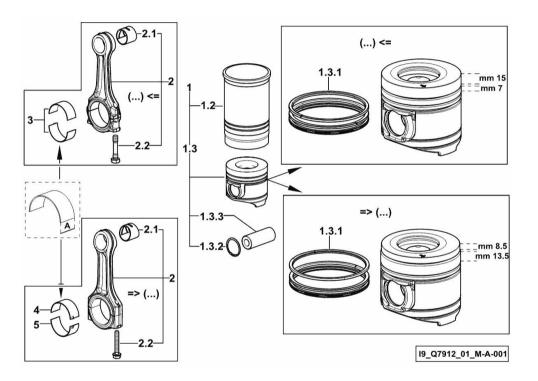

Name

QTY

## Ref: B0.04.0 (1)





Fig.

CAMSHAFT

P/n

Notes: [XA 85 -> ZKDCW40200TH10001]

1	0.065.1331.2	8	rod
2	0.013.9543.3	1	camshaft
2.2	0.065.1324.0/10	1	gear $Z = 32$
3	0.065.1330.0	8	tappets
4	2.1559.398.0	1	bushing 10.5x13x12
<del>1</del> 5	0.013.5017.0		*
-		1	gear z=58
6	0.065.1350.0	1	small disc
7	2.0132.207.2	4	screw m 10 p.1 x 25
8	2.1410.016.1	1	circlip 40
9	0.065.1352.0	1	shim
10	0.018.2233.0	2	shoulder ring
12	0.007.1177.3/20	1	gear z = 57
			- WITH RED IDENTIFICATION STAMP
12.2	2.1559.185.0/10	1	bushing
13	0.007.1178.3/20	1	gear z = 57
			- WITH YELLOW IDENTIFICATION STAMP
13.2	2.1559.185.0/10	1	bushing
14	0.007.1179.3/20	1	gear z = 57
- '	3.307.1175.20		- WITH GREEN IDENTIFICATION STAMP
14.2	2.1559.185.0/10	1	bushing
			6
15	2.0312.205.2	2	screw
16	2.1480.014.1	2	washer 8
17	0.065.1353.0	1	small plate

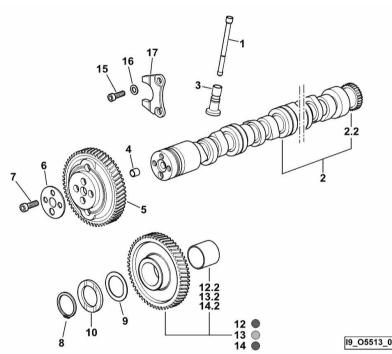

I9\_05513\_00\_0-A-001

XA 85 -	> ZKDCW40200TH1000	1
		-

Ref: B0.04.2 (1)

## 15 16 17 0 ° 🍥 (0) 20 21 0 0 00 23 19 22 17 18 І9\_01011\_00\_0-В-001

TIMING CASE					
Fig.	P/n	QTY	Name		
Notes:					
[XA 85 ->	ZKDCW40200TH100	01]			

Section: B0 - ENGINE

4	2.0432.009.7	1	stud bolt m 8 p.1.25 / p. 1 x 35
15	2.0432.003.7	1	stud bolt m 8 p.1.25 / p.1 x 20
16	2.0312.214.2	7	screw m 8 p.1.25 x 40
17	2.1480.014.1	15	washer 8
18	0.013.4981.0	1	guard
19	0.065.1150.0/30	1	gasket
20	2.1470.004.2	4	lock washer 8
21	2.1011.405.2	2	nut m 8 p.1
22	2.0312.208.2	8	screw m 8 p.1.25 x 25
23	2.1529.167.0	1	oil seal

Thank you so much for reading. Please click the "Buy Now!" button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email:

ebooklibonline@outlook.com