Name


QTY

Section: B0 - ENGINE CRANKCASE

P/n

Fig.

Ref: B0.01.0 (1)

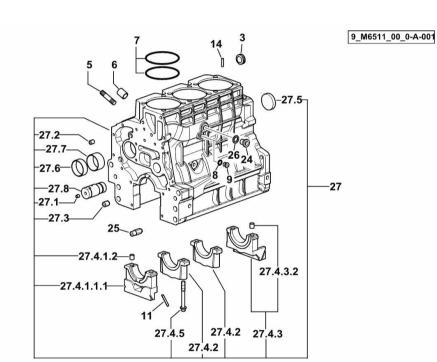


<b>Notes:</b> [XA-66 -> 30	001]		
3	2.3199.312.2/20	1	plug m 35x1.5x9.5
5	2.0439.273.7	6	stud bolt m 8
6	2.1559.188.2	3	bush 11.4 x 14 x16
7	2.1539.259.0	6	special oil seal 107.62x2.62
8	2.1560.010.0	1	gasket 14.2 x 20
9	2.3199.292.0	1	plug 1/4" gas
11	0.066.1152.0/10	4	gasket
14	2.1549.154.2	3	bush 4.8x5.8x16
24	2.3120.101.0	1	plug m 18 p.1.5
25	0.013.4946.0/10	1	sprayer nozzle
26	2.1560.014.0	1	washer 18.2 x 24
27	0.015.2793.4/10	1	crankcase
27.1	2.3130.001.1	9	plug 1/8" gas
27.2	2.3130.002.1	2	plug 1/4" gas
27.3	2.3130.003.1	2	plug 3/8" gas
27.4.1.1.1	0.065.1112.7/10	1	support
27.4.1.2	2.1699.165.0	1	bush 12.3x15x16
27.4.2	0.065.1114.0/10	2	support
27.4.3	0.065.1116.3	1	support
27.4.3.2	2.1699.165.0	1	bush 12.3x15x16
27.4.5	0.065.1117.0	8	screw m 12 x 100
27.5	2.3179.012.0	1	plug 60
27.6	0.065.1140.0	3	special bushing 59X55X20
27.7	0.065.1141.0	1	special bushing 59X55X30
27.8	0.014.1340.0/10	1	pin mm 85

Ref: B0.01.4 (1)

# MONOBLOC ENGINE-GEARBOX CONNECTING FLANGE

Section: B0 - ENGINE

Fig.	P/n	QTY	Name
Notes: [XA-66 ->	20011		
[AA-00 ->	5001]		
1	0.007.7752.0/30	1	flange
2	2.0112.511.2	8	screw m 14 p.2 x 30
3	2.1651.912.0	2	cylindrical plug 12x28
4	2.1651.917.0	1	cylindrical plug 12x40
5	2.0432.257.7	1	stud bolt m 12 p.1.75 - 1.25 x 30
6	2.0439.250.7	1	stud bolt m $12/m$ 10 x 30
7	0.011.9294.0/10	1	bush

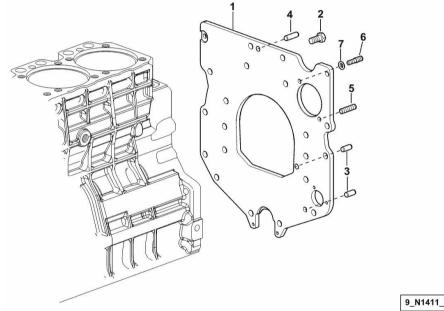

9\_N1411\_02\_0-A-001

Ref: B0.02.0 (1)


## Section: B0 - ENGINE CRANKSHAFT PULLEY Fig. P/n

QTY	Name

#### .

**Notes:** [XA-66 -> 3001]

3	0.007.1457.0/30	1	pulley
5	0.085.1248.0/20	1	hub
6	2.0399.144.7/10	1	screw m 20 p.1.5x51
8	2.1720.006.0	1	key 4x6.5

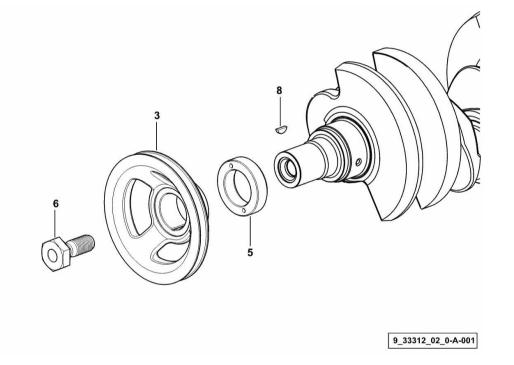

XA-66	-> 3001

Ref: B0.02.1 (1)


# Section: B0 - ENGINE CRANKSHAFT PULLEY

```
Fig. P/n QTY Name
```

### Notes:

- FOR TRACTORS WITH AIR CONDITIONING [XA-66 -> 3001]

3	0.007.1458.0/40	1	pulley
5	0.085.1248.0/20	1	hub
6	2.0399.144.7/10	1	screw m 20 p.1.5x51
8	2.1720.006.0	1	key 4x6.5

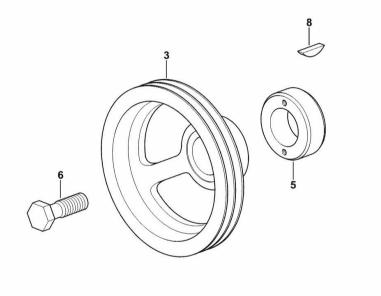

9\_37512\_06\_0-A-001

Ref: B0.02.2 (1)


# Section: B0 - ENGINE PULSE WHEEL

Fig. P/n QTY Name

# Notes:

- FOR MODELS WITHOUT FRONT P.T.O. [XA-66 -> 3001]

1 0.011.3531.0 1 gear Z = 48

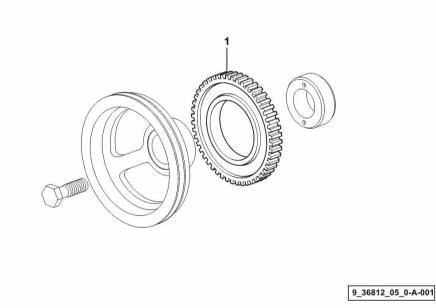


## Section: B0 - ENGINE Ref: B0.02.3 (1) ENGINE CRANKSHAFT PULLEY WITH RING-FEEDER RINGS

Fig.	P/n	QTY Name	

#### Notes:

- FOR MODELS EQUIPPED WITH FRONT P.T.O. [XA-66 -> 3001]

1	0.082.1244.0/10	1	pulley
2	0.011.3515.0/20	1	hub $Z = 48$
3	0.065.1256.0	2	ring 45x52
4	2.1579.865.0	1	spacer 45.2x51.8x10
5	2.0439.195.7	1	stud bolt m 20 p.1.5x80
6	2.1019.094.7	1	nut m 20 p.1.5

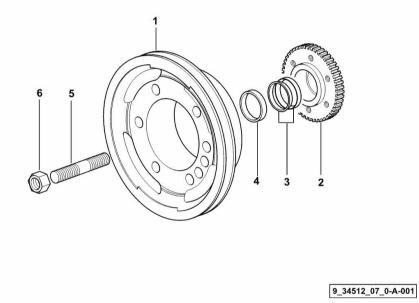


## Section: B0 - ENGINE Ref: B0.02.4 (1) ENGINE CRANKSHAFT PULLEY WITH RING-FEEDER RINGS

Fig.	P/n	QTY	Name

#### Notes:

- FOR TYPES WITH AIR CONDITIONING AND FRONT PTO [XA-66 -> 3001]

1	0.010.4274.0	1	pulley
2	0.011.3515.0/20	1	hub $Z = 48$
3	0.065.1256.0	2	ring 45x52
4	2.1579.865.0	1	spacer 45.2x51.8x10
5	2.0439.195.7	1	stud bolt m 20 p.1.5x80
6	2.1019.094.7	1	nut m 20 p.1.5
7	2.1589.137.0	3	shoulder ring 71x110x1
8	0.089.1253.0/10	1	spacer

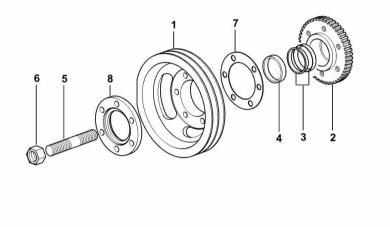

9\_37512\_03\_0-A-001


Ref: B0.02.5 (1)

## COOLANT PUMP AND ALTERNATOR DRIVEBELT

Section: B0 - ENGINE

	Name	QTY	P/n	Fig.
				Notes:
			001]	[XA-66 -> 3
			001]	[XA-66 -> 3

1 2.4119.193.0 1 vee belt AV 10 x 1254 mm

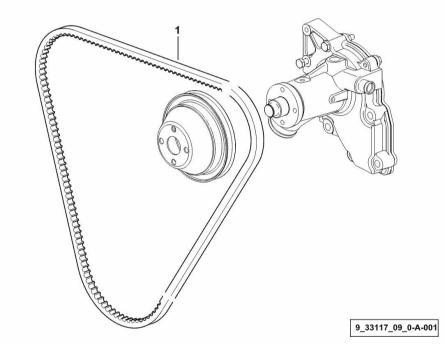

Ref: B0.02.6 (1)

## COOLANT PUMP AND ALTERNATOR DRIVEBELT


Fig.	P/n	QTY	Name

Notes:

Section: B0 - ENGINE

- FOR TRACTORS WITH AIR CONDITIONING [XA-66 -> 3001]

1	2.4119.138.0	2	belt AV 12.7x1380 mm
2	2.4119.134.0	1	belt AV 10x794 mm

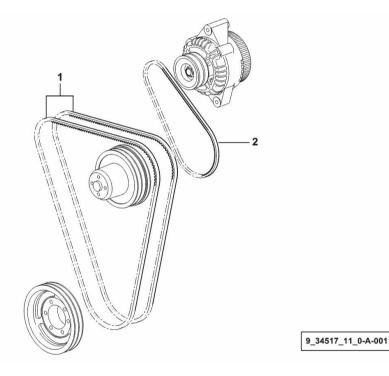

Name

QTY

Section: B0 - ENGINE CRANKSHAFT

P/n

Fig.

Ref: B0.02.7 (1)


### 7.5 7.1 7.3 10 1001 -1002 7.2 8 801-802 Ń C O) 6 7.4 9 -901 902 16 19 22 15 0 / 17 18 9\_34812\_00\_0-A-001

<b>Notes:</b> [XA-66 ->	3001]		
6 7.1	2.1720.006.0 0.007.1554.0/20	1 1	key 4x6.5 crankshaft
7.2	0.065.1323.0/30	1	gear Z = 29
7.3	2.1651.915.0	1	pin 12x35
7.4	2.1720.006.0	1	key 4x6.5
7.5	2.3130.001.1	3	plug 1/8" gas
8	0.065.1215.0/10	4	main half bushing STANDARD
9	0.065.1216.0/10	4	main half bushing STANDARD
10	0.065.1218.0	4	shim STANDARD
15	0.065.1254.0/20	1	gasket
16	0.007.1711.0/10	1	cover
17	2.1475.002.2	9	conical washer 8
18	2.0112.207.2	9	screw m 8 p 1.25 x 20
19	2.1529.073.0	1	special oil seal 110x130x13
22	2.1599.524.7	1	washer 21x60x12
801	0.065.1215.7		main half bushing - mm 0.25
802	0.065.1215.8		main half bushing - mm 0.50
901	0.065.1216.7		main half bushing - mm 0.25
902	0.065.1216.8		main half bushing - mm 0.50
1001	0.065.1218.7		$shim + mm \ 0.10$
1002	0.065.1218.8		shim $+$ mm 0.15

Ref: B0.02.10 (1)

### 

1	0.014.2774.3	1	flywheel
1.2	0.069.1242.0	1	crown wheel $Z = 121$
2	2.0139.036.2	6	screw m 12 p.1.25 x 35

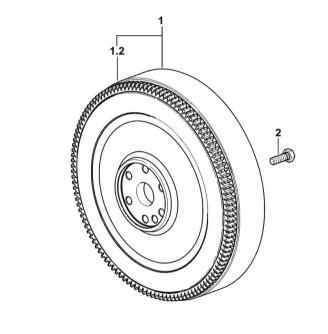

9\_N1112\_02\_0-A-001

Thank you so much for reading. Please click the "Buy Now!" button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email:

ebooklibonline@outlook.com