

Section: B0 - ENGINE

Ref: B0.01.2 (1)



Fig.	P/n	QTY	Name
••			
Notes: [XA-76]			
[AA-70]			
3	2.3199.312.2/20	1	plug m 35x1.5x9.5
5	2.0439.273.7	8	stud bolt m 8
6	2.1559.188.2	4	bush 11.4 x 14 x16
7	2.1539.259.0	8	special oil seal 107.62x2.62
8	2.1560.010.0	1	gasket 14.2 x 20
9	2.3199.292.0	1	plug 1/4" gas
11	0.066.1152.0/10	4	gasket
13	2.1549.154.2	4	bush 4.8x5.8x16
14	0.015.2988.4/10	1	crankcase
14.1	2.3130.001.1	10	plug 1/8" gas
14.2	2.3130.002.1	2	plug 1/4" gas
14.3	2.3130.003.1	6	plug 3/8" gas
14.4.1.1.1	0.065.1112.7/10	1	support
14.4.1.2	2.1699.165.0	1	bush 12.3x15x16
14.4.2	0.065.1114.0/10	3	support
14.4.3	0.065.1116.3	1	support
14.4.3.2	2.1699.165.0	1	bush 12.3x15x16
14.4.5	0.065.1117.0	10	screw m 12 x 100
14.5	2.3179.012.0	1	plug 60
14.6	0.065.1140.0	4	special bushing 59X55X20
14.7	0.065.1141.0	1	special bushing 59X55X30
14.8	0.014.1340.0/10	1	pin mm 85
25	0.013.4946.0/10	1	sprayer nozzle
26	2.3120.101.0	1	plug m 18 p.1.5
28	2.1560.014.0	1	washer 18.2 x 24

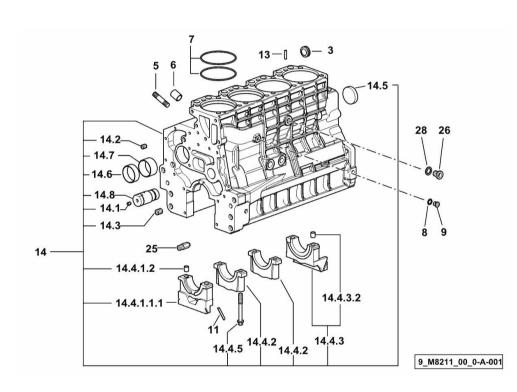

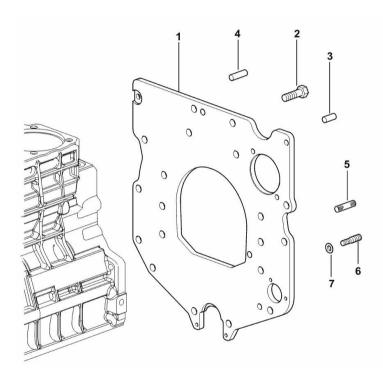

9_37311_01_0-A-001

XA-76

Section: B0 - ENGINE Ref: B0.01.4 (1)

MONOBLOC ENGINE-GEARBOX CONNECTING FLANGE


Fig.	P/n	QTY	Name
Notes: [XA-76]			
1	0.007.7752.0/30	1	flange
2	2.0112.511.2	8	screw m 14 p.2 x 30
3	2.1651.912.0	2	cylindrical plug 12x28
4	2.1651.917.0	1	cylindrical plug 12x40
5	2.0432.257.7	1	stud bolt m 12 p.1.75 - 1.25 x 30
6	2.0439.250.7	1	stud bolt m 12 / m 10 x 30
7	0.011.9294.0/10	1	bush

Section: B0 - ENGINE

Ref: B0.01.6 (1)

SIDE PLUG FOR CYLINDER BLOCK

	od i on cilii	DEIX DE	oek	
Fig.	P/n	QTY	Name	
Notes: [XA-76]				
22 23	2.1560.017.0 2.3120.002.4	1 1	gasket 22.2 x 27 plug m 22 x 1.5	

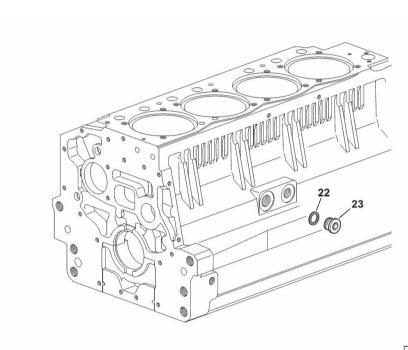


9_33211_07_0-A-001

Section: B0 - ENGINE


Ref: B0.01.7 (1)

FITTING FOR ENGINE OIL PRESSURE SWITCH

	D/m		
Fig.	P/n	QTY	Name
Notes: [XA-76]			
100 101	2.3339.353.2/20 2.1560.014.0	1 1	pipe fitting 12 p.1.5-18 p.1.5 washer 18.2 x 24

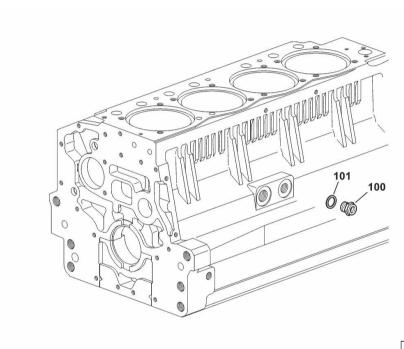

9_33215_12_0-A-001

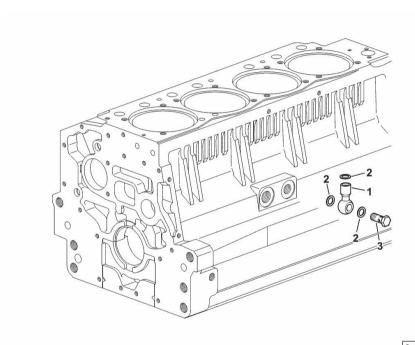

9_32315_07_0-A-001

XA-76

Section: B0 - ENGINE Ref: B0.01.8 (1)

FITTING FOR ENGINE OIL PRESSURE SWITCH


Fig.	P/n	QTY	Name
Notes: [XA-76]			
1 2 3	2.3249.014.2 2.1560.008.0 2.3335.052.2	1 3 1	pipe fitting m 12 p.1.5 gasket 12.2 x 18 pipe union m 12 p.1.5

Section: B0 - ENGINE

Ref: B0.01.10 (1)

LOWER PLUG FOR CYLINDER BLOCKS

Fig.	P/n	QTY	Name
Notes: [XA-76]			
1	2.3130.003.1	2	plug 3/8" gas

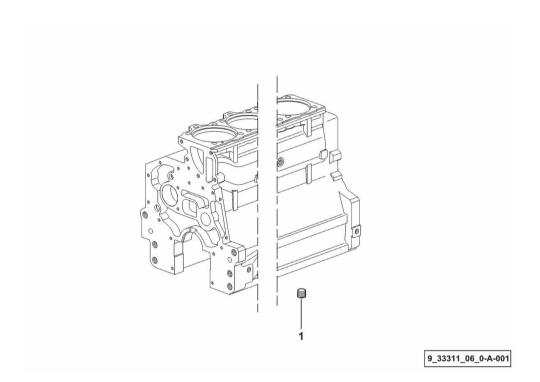


Section: B0 - ENGINE

Ref: B0.02.0 (1)

CRANKSHAFT PULLEY

Fig.	P/n	QTY	Name
Notes: [XA-76]			
3	0.007.1457.0/30	1	pulley
5	0.085.1248.0/20	1	hub
6	2.0399.144.7/10	1	screw m 20 p.1.5x51
8	2.1720.006.0	1	key 4x6.5

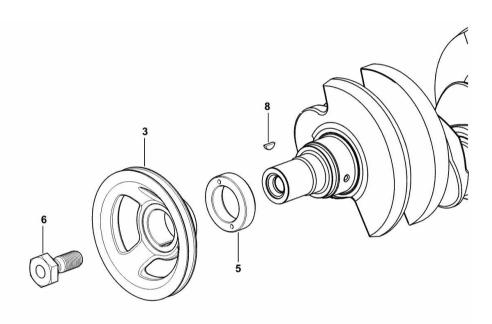


9_33312_02_0-A-001

Section: B0 - ENGINE

Ref: B0.02.1 (1)

CRANKSHAFT PULLEY

Fig.	P/n	QTY	/ Name
Notes:			
	ACTORS WITH AIR COND	DITIONING	G [XA-76]
3	0.007.1458.0/40	1	pulley
5	0.085.1248.0/20	1	hub
6	2.0399.144.7/10	1	screw m 20 p.1.5x51
			key 4x6.5

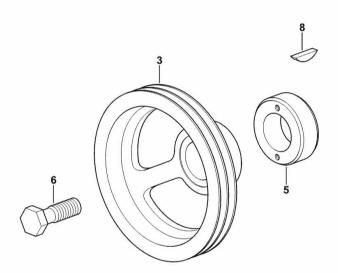

9_37512_06_0-A-001

Section: B0 - ENGINE

Ref: B0.02.2 (1)

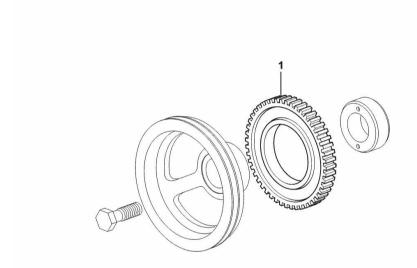


Fig. P/n QTY Name				
	Fig.	P/n	QTY	Name

Notes:

- FOR MODELS WITHOUT FRONT P.T.O. [XA-76]

1 0.011.3531.0 gear Z = 48




9_36812_05_0-A-001



Fig.

P/n

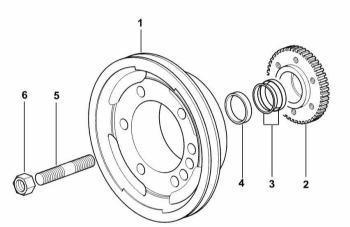

9_34512_07_0-A-001

XA-76


Section: B0 - ENGINE Ref: B0.02.3 (1)

Name

ENGINE CRANKSHAFT PULLEY WITH RING-FEEDER RINGS

QTY

Notes: - FOR M	ODELS EQUIPPED WITH FI	RONT P.T	Г.О. [ХА-76]	
1	0.082.1244.0/10	1	pulley	
2	0.011.3515.0/20	1	hub $Z = 48$	
3	0.065.1256.0	2	ring 45x52	
4	2.1579.865.0	1	spacer 45.2x51.8x10	
5	2.0439.195.7	1	stud bolt m 20 p.1.5x80	
6	2.1019.094.7	1	nut m 20 p.1.5	

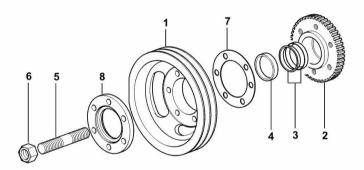

9_37512_03_0-A-001

Fig.

P/n

0.089.1253.0/10

XA-76

Section: B0 - ENGINE Ref: B0.02.4 (1)

Name

ENGINE CRANKSHAFT PULLEY WITH RING-FEEDER RINGS

QTY

1

Notes: - FOR TY	PES WITH AIR CONDITIO	NING AN	D FRONT PTO [XA-76]	
1	0.010.4274.0	1	pulley	
2	0.011.3515.0/20	1	hub Z = 48	
3	0.065.1256.0	2	ring 45x52	
4	2.1579.865.0	1	spacer 45.2x51.8x10	
5	2.0439.195.7	1	stud bolt m 20 p.1.5x80	
6	2.1019.094.7	1	nut m 20 p.1.5	
7	2.1589.137.0	3	shoulder ring 71x110x1	

spacer

Section: B0 - ENGINE Ref: B0.02.5 (1)


COOLANT PUMP AND ALTERNATOR DRIVEBELT


Fig.	P/n	QTY	Name

Notes:

- FOR TRACTORS WITHOUT AIR CONDITIONING [XA-76]

2.4119.193.0 1 vee belt AV 10 x 1254 mm

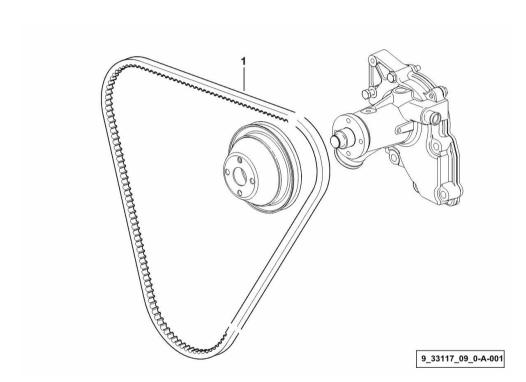


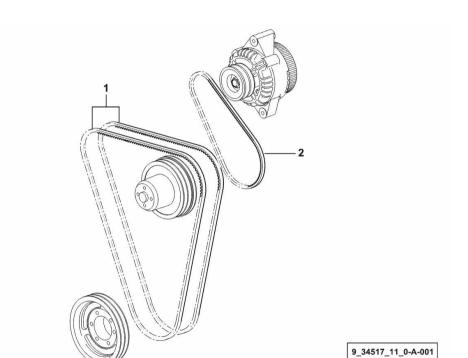

Section: B0 - ENGINE Ref: B0.02.6 (1)

COOLANT PUMP AND ALTERNATOR DRIVEBELT

Fig.	P/n	QTY	Name					
Notes: - FOR TRACTORS WITH AIR CONDITIONING [XA-76]								

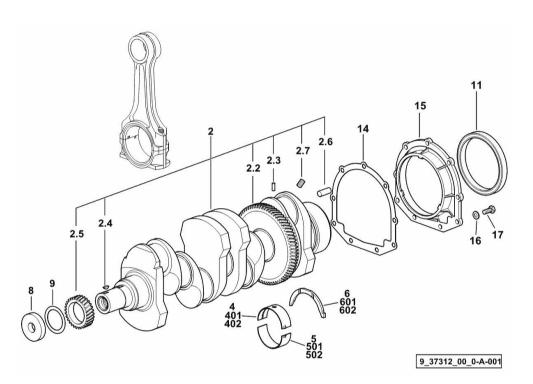

XA-76


Section: B0 - ENGINE CRANKSHAFT Ref: B0.02.8 (1)


Fig.	P/n	QTY	Name
Notes: [XA-76]			
2	0.086.1210.3/40	1	crankshaft
2.2	0.065.1211.0/10	1	crown wheel
2.3	2.1630.608.0	1	pin 6x16
2.4	2.1720.006.0	1	key 4x6.5
2.5	0.065.1323.0/30	1	gear Z = 29
2.6	2.1651.915.0	1	pin 12x35
2.7	2.3130.001.1	4	plug 1/8" gas
4	0.065.1215.0/10	5	main half bushing STANDARD
5	0.065.1216.0/10	5	main half bushing STANDARD
6	0.065.1218.0	4	shim STANDARD
8	2.1599.524.7	1	washer 21x60x12
9	2.1589.189.0	2	shoulder ring mm 1.00
11	2.1529.073.0	1	special oil seal 110x130x13
14	0.065.1254.0/20	1	gasket
15	0.007.1711.0/10	1	cover
16	2.1475.002.2	9	conical washer 8
17	2.0112.207.2	9	screw m 8 p 1.25 x 20
401	0.065.1215.7		main half bushing - mm 0.25
402	0.065.1215.8		main half bushing - mm 0.50
501	0.065.1216.7		main half bushing - mm 0.25
502	0.065.1216.8		main half bushing - mm 0.50
601	0.065.1218.7		$shim + mm \ 0.10$
602	0.065.1218.8		$shim + mm \ 0.15$

Section: B0 - ENGINE

Ref: B0.02.12 (1)



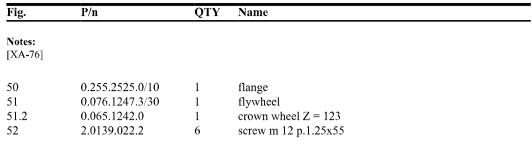

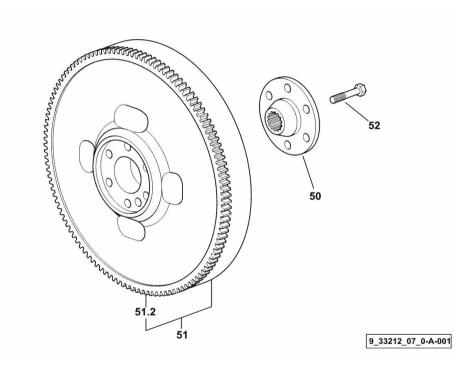

Thank you so much for reading.

Please click the "Buy Now!"

button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email: ebooklibonline@outlook.com