Section: B0 - ENGINE

Ref: B0.00.0 (1)

LIGHT ENGINE Fig. P/n QTY Name

1


Notes:

1

- EUROPE [XB 105 TB ->ZKDCR60200TH10001]

I6.IG601.00.0

engine ON ORDERING PLEASE ENGINE NO. REQUIRED

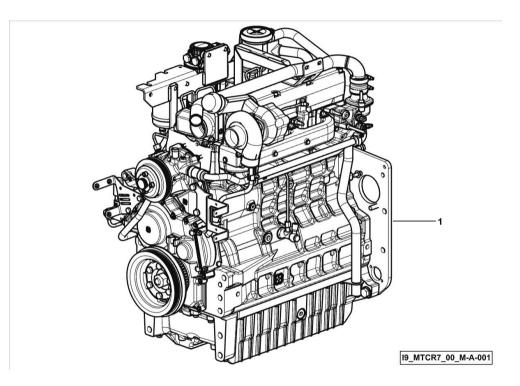

Section: B0 - ENGINE CRANKCASE

Ref: B0.01.0 (1)

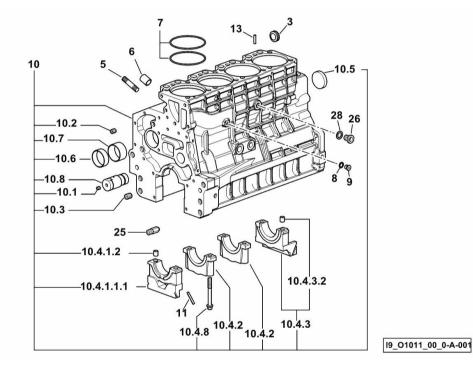


Fig.	P/n	QTY	Name
NT 4			
Notes:	>ZKDCR60200TH10001	1	
LVD 102 LD -	~ZKDCR0020011110001	1	
3	2.3199.312.2/20	1	plug m 35x1.5x9.5
5	2.0439.279.7	8	stud bolt m 8 p.1 x 25
6	2.1559.188.2	4	bush 11.4 x 14 x16
7	2.1539.259.0	8	special oil seal 107.62x2.62
8	2.1560.010.0	1	gasket 14.2 x 20
9	2.3199.292.0	1	plug 1/4" gas
10	0.014.9655.4/30	1	crankcase
10.1	2.3130.001.1	14	plug 1/8" gas
10.2	2.3130.002.1	4	plug 1/4" gas
10.3	2.3130.003.1	6	plug 3/8" gas
10.4.1.1.1	0.065.1112.7/10	1	support
10.4.1.2	2.1699.165.0	1	bush 12.3x15x16
10.4.2	0.065.1114.0/10	3	support
10.4.3	0.065.1116.3	1	support
10.4.3.2	2.1699.165.0	1	bush 12.3x15x16
10.4.8	0.065.1117.0	10	screw m 12 x 100
10.5	2.3179.012.0	1	plug 60
10.6	0.065.1140.0	4	special bushing 59X55X20
10.7	0.065.1141.0	1	special bushing 59X55X30
10.8	0.014.1340.0/10	1	pin mm 85
11	0.066.1152.0/10	4	gasket
13	2.1549.154.2	4	bush 4.8x5.8x16
25	0.013.4946.0/10	1	sprayer nozzle
26	2.3120.101.0	1	plug m 18 p.1.5
28	2.1560.014.0	1	washer 18.2 x 24

1/1

Ref: B0.01.1 (1)

MONOBLOC ENGINE-GEARBOX CONNECTING FLANGE

2

1

1

Section: B0 - ENGINE

27

28

29

2.1651.912.0

2.1651.917.0


2.0432.257.7

Fig.	P/n	QTY	Name	
Notes:				
[XB 105 T	B ->ZKDCR60200TH10001]		
1	2.1475.005.2	2	washer 14	
2	2.0112.524.2	2	screw m 14 p.2 x 75	
3	2.0112.624.2	2	screw m 16 p.2 x 75	
4	2.1475.006.2	2	spring washer 16	
6	2.0439.250.7	1	stud bolt m 12 / m 10 x 30	
7	0.011.9294.0/10	1	bush	
25	0.019.1488.0	1	flange	
26	2.0112.511.2	8	screw m 14 p.2 x 30	
~ 7	0.1 (51.010.0	•	1. 1. 1. 10.00	

cylindrical plug 12x28

cylindrical plug 12x40

stud bolt m 12 p.1.75 - 1.25 x 30

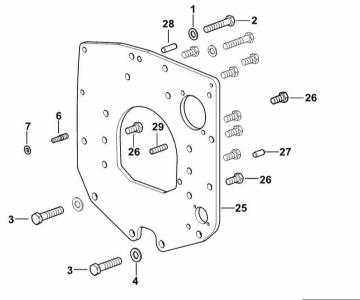

I9_K7411_01_0-A-001

Ref: B0.01.2 (1)

LOWER PLUG FOR CYLINDER BLOCKS


Fig. P/n QTY Name

Notes:

[XB 105 TB ->ZKDCR60200TH10001]

Section: B0 - ENGINE

1 2.3130.003.1 2 plug 3/8" gas

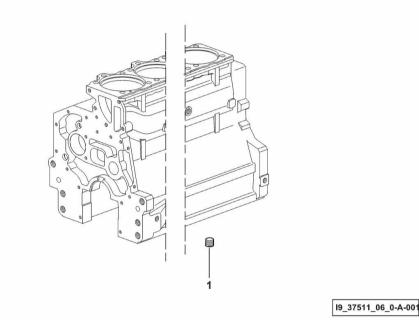

Ref: B0.01.3 (1)


SIDE PLUG FOR CYLINDER BLOCK

Fig.	P/n	QTY	Name

Notes: [XB 105 TB ->ZKDCR60200TH10001]

Section: B0 - ENGINE

22	2.1560.017.0	1	gasket 22.2 x 27
23	2.3120.002.4	1	plug m 22 x 1.5

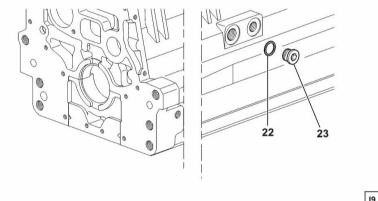

I9_33211_07_0-A-001

Ref: B0.01.4 (1)


ENGINE OIL AND TURBO PRESSURE SWITCH UNION

Fig.	P/n	QTY	Name
Notes:			

1100	,,
[XB	105 TB ->ZKDCR60200TH10001]

Section: B0 - ENGINE

10	2.3339.574.2	1	pipe fitting
11	2.3249.014.2	1	pipe fitting m 12 p.1.5
12	2.1560.008.0	4	gasket 12.2 x 18
13	2.3335.005.2	1	pipe union m 12 p.1.5 x 24

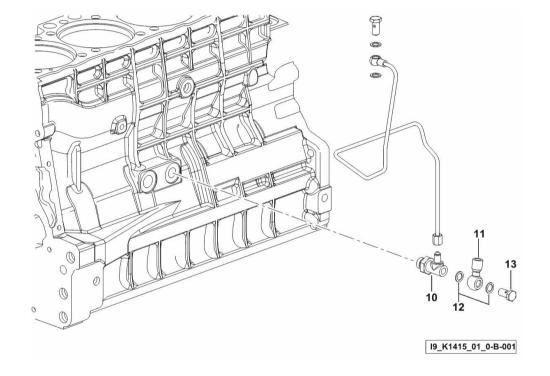

Ref: B0.02.0 (1)


Section: B0 - ENGINE ENGINE FLYWHEEL Fig. P/n

P/n QTY Name

Notes:

[XB 105 TB ->ZKDCR60200TH10001]

1	0.019.2098.3	1	flywheel
1.2	0.065.1242.0	1	crown wheel $Z = 123$
2	0.255.2525.0/10	1	flange
3	2.0139.022.2	6	screw m 12 p.1.25x55

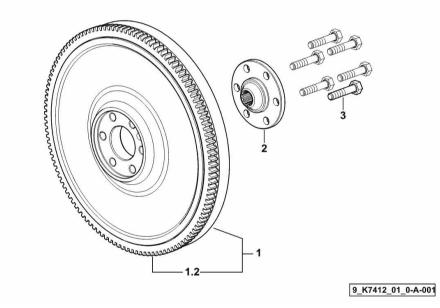


Name

Section: B0 - ENGINE CRANKSHAFT

Fig.

Ref: B0.02.2 (2)

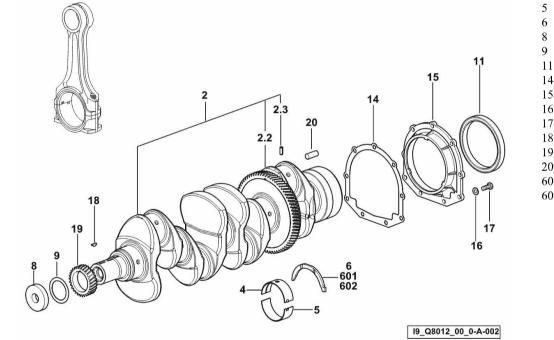

Notes:	
[XB 105 TB ->ZKDCR60200TH10001]	

P/n

2	0.021.8246.3	1	crankshaft
2.2	0.065.1211.0/10	1	crown wheel
2.3	2.1630.608.0	1	pin 6x16
4	0.019.5455.0	5	main half bushing STANDARD
5	0.019.5456.0	5	main half bushing STANDARD
6	0.065.1218.0	4	shim STANDARD
8	2.1599.524.7	1	washer 21x60x12
9	2.1589.189.0	2	shoulder ring mm 1.00
11	2.1529.073.0	1	special oil seal 110x130x13
14	0.065.1254.0/20	1	gasket
15	0.007.1711.0/10	1	cover
16	2.1475.002.2	9	conical washer 8
17	2.0112.207.2	9	screw m 8 p 1.25 x 20
18	2.1720.006.0	1	key 4x6.5
19	0.065.1323.0/30	1	gear Z = 29
20	2.1651.915.0	1	pin 12x35
601	0.065.1218.7		shim $+ \text{ mm } 0.10$
602	0.065.1218.8		shim + mm 0.15

QTY


Ref: B0.02.3 (1)

ENGINE CRANKSHAFT PULLEY WITH RING-FEEDER RINGS

Fig.	P/n	QTY	Name
NT /			
Notes:	->ZKDCR60200TH10	0011	

1	0.015.6055.0	1	pulley
2	0.011.3515.0/20	1	hub $Z = 48$
3	0.065.1256.0	2	ring 45x52
4	2.1579.865.0	1	spacer 45.2x51.8x10
5	2.0439.195.7	1	stud bolt m 20 p.1.5x80
6	2.1019.094.7	1	nut m 20 p.1.5
7	2.0112.320.2	6	screw m 10 p.1.5 x 55
8	2.1470.006.2	6	lock washer 10

Section: B0 - ENGINE

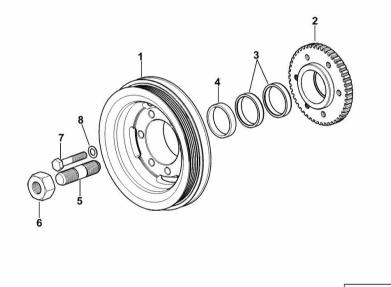

I9_06312_03_0-A-001

Ref: B0.02.4 (1)

COOLANT PUMP AND ALTERNATOR DRIVEBELT


Fig.	P/n	QTY	Name

Notes:

Section: B0 - ENGINE

[XB 105 TB ->ZKDCR60200TH10001]

1 2.4119.188.0 1 belt PV-K5 17.4x1275 mm

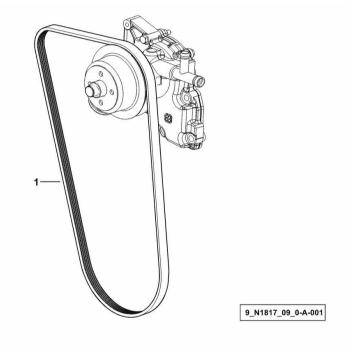

Name

Section: B0 - ENGINE COUNTERWEIGHTS

P/n

[XB 105 TB ->ZKDCR60200TH10001]

Fig.

Notes:

Ref: B0.02.5 (1)

38.2.2 38.2.4 38.3 38,2 38.3.5 38.4.2 38.3.2 1 38.3.4 38.2.2 38.4.1 38.6 38.7 38.3.2 38.6 25 00 29 0 38.5-38.1.1 45 8 6-38.1.2 I9_33212_03_0-A-001

25	2.1589.139.0	1	shoulder ring mm 0.3
26	2.1589.140.0	3	shoulder ring mm 0.1
29	2.1579.628.0	3	spacer 16.5x26x0.1
33	2.1579.629.0	6	spacer 12.5x26x0.1
34	2.1589.048.0	1	shoulder ring 16.5x26x0.3
35	2.1589.049.0	1	shoulder ring 12.5x26x0.3
38.1.1	0.086.1231.0/10	1	box
38.1.2	2.3130.001.1	4	plug 1/8" gas
38.2	0.086.1233.3/30	1	mass sx/lh/li
38.2.2	2.1559.115.0	2	special bushing 26x30x30
38.2.4	2.1651.302.0	1	roll pin 4x6
38.3	0.065.1233.3/30	1	mass dx/rh/re
38.3.2	2.1559.115.0	2	special bushing 26x30x30
38.3.4	2.1651.302.0	1	roll pin 4x6
38.3.5	2.1410.018.1	1	circlip 45
38.4.1	0.065.1234.0/10	1	shaft
38.4.2	2.3130.001.1	1	plug 1/8" gas
38.5	2.1631.717.0	2	roll pin 8 x 40
38.6	2.1589.185.0	4	shoulder ring 26.1x34x1
38.7	2.0522.212.7	1	screw m 8 p.1.25 x 30
44	2.1579.626.0	2	spacer 13.2x16x11
45	2.0139.028.2	4	screw m 12
46	2.1699.191.0	1	bush 7x10x16

ΟΤΥ



(...) <-

->(...)

->(...)

4

4

con.rod half bushing STANDARD - $A = 29.85 \rightarrow 30.10$

con.rod half bushing STANDARD - $A = 29.85 \rightarrow 30.10$

Ref: B0.03.0 (1)

CYLINDER - PISTON - CONNECTING ROD

Section: B0 - ENGINE


4

5

			DER - FISTON - C		
		Fig.	P/n	QTY	Name
		Notes: [XB 105 TH	3 ->ZKDCR60200TH10001]	
		1	0.O55.0065.A	4	cyl. piston assembly "A" - CLASS A
		1	0.O55.0065.B	4	cyl. piston assembly "B" - CLASS B
[<u>∭</u> -2.1	1.2	0.A12.2675.0	1	engine cylinder "A" - CLASS A
		1.2	0.B12.2675.0	1	engine cylinder "B" - CLASS B
	2	1.3	0.055.0060.A	1	complete piston "A" - CLASS A
	() <-	1.3	0.055.0060.B	1	complete piston "B" - CLASS B
115		1.3.1	0.338.0052.6/20	1	piston ring set
4VD		1.3.2	2.1411.014.1	2	circlip 35
	₫2.2_	1.3.3	0.078.1236.0	1	piston pin Ø 18 / Ø 35 / L = mm 86
		2	0.014.5175.3	4	engine connecting rod
ſ					() <-
		2	0.019.2226.3/10	4	engine connecting rod $\rightarrow ()$
	2	2.1	2.1559.255.0	1	special bushing 34.60x39.130x34.65 () <-
	-> ()	2.1	2.1559.532.0	1	special bushing 34.60x39.130x36.65
-2)		2.2	2.0399.213.0	2	screw m 12 p.1.25x61.5 () <-
S	2.2	2.2	2.0399.365.0	2	screw m 10 p.1.25x61.5 -> ()
	.	3	0.065.1225.0	8	con.rod half bushing STANDARD - $A = 28.75 \rightarrow 29.00$ () <-
		3	0.065.1225.7	8	con.rod half bushing - mm 0.25 $() \leq -$
		3	0.065.1225.8	8	con.rod half bushing - mm 0.50

0.019.5453.0

0.019.5454.0

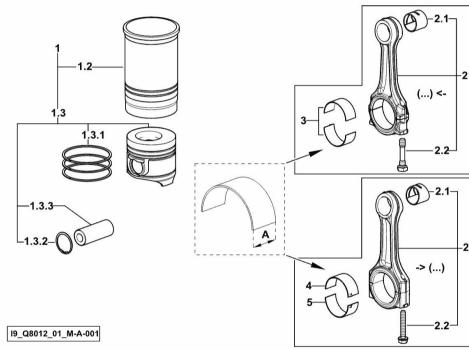

Name


QTY

Section: B0 - ENGINE CAMSHAFT

P/n

Fig.

Ref: B0.04.0 (1)

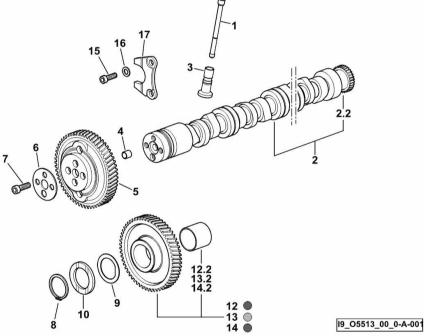

Notes: [XB 105 T	B ->ZKDCR60200TH10001]	
1	0.065.1331.2	8	rod
2	0.013.9543.3	1	camshaft
2.2	0.065.1324.0/10	1	gear Z = 32
3	0.065.1330.0	8	tappets
4	2.1559.398.0	1	bushing 10.5x13x12
5	0.013.5017.0	1	gear z=58
6	0.065.1350.0	1	small disc
7	2.0132.207.2	4	screw m 10 p.1 x 25
8	2.1410.016.1	1	circlip 40
9	0.065.1352.0	1	shim
10	0.018.2233.0	2	shoulder ring
12	0.007.1177.3/20	1	gear $z = 57$
			- WITH RED IDENTIFICATION STAMP
12.2	2.1559.185.0/10	1	bushing
13	0.007.1178.3/20	1	gear $z = 57$
			- WITH YELLOW IDENTIFICATION STAMP
13.2	2.1559.185.0/10	1	bushing
14	0.007.1179.3/20	1	gear z = 57
			- WITH GREEN IDENTIFICATION STAMP
14.2	2.1559.185.0/10	1	bushing
15	2.0312.205.2	2	screw
16	2.1480.014.1	2	washer 8
17	0.065.1353.0	1	small plate

Name

QTY

Ref: B0.04.1 (1)

15 **16** 17 0 00 (0) 20 21 0 0 00 23 19 17 18 22 І9_01011_00_0-В-001

Notes: [XB 105 TB ->ZKDCR60200TH10001]

P/n

Section: B0 - ENGINE

TIMING CASE

Fig.

4	2.0432.009.7	1	stud bolt m 8 p.1.25 / p. 1 x 35
15	2.0432.003.7	1	stud bolt m 8 p.1.25 / p.1 x 20
16	2.0312.214.2	7	screw m 8 p.1.25 x 40
17	2.1480.014.1	15	washer 8
18	0.013.4981.0	1	guard
19	0.065.1150.0/30	1	gasket
20	2.1470.004.2	4	lock washer 8
21	2.1011.405.2	2	nut m 8 p.1
22	2.0312.208.2	8	screw m 8 p.1.25 x 25
23	2.1529.167.0	1	oil seal

Ref: B0.04.2 (1)


Section: B0 - ENGINE TIMING COVER FIXING

Fi	lg.	P/n	QTY	Name

Notes:

[XB 105 TB ->ZKDCR60200TH10001]

4	0.016.7791.0	2	small column
5	2.0112.317.2	2	screw m 10 p.1.5 x 45
6	2.1470.006.2	2	lock washer 10

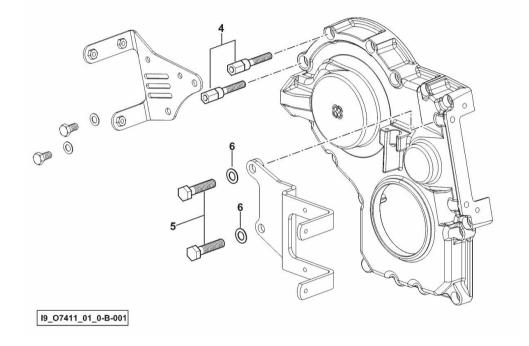

Section: B0 - ENGINE CASING COVER


Ref: B0.04.3 (1)

Fig. P/n QTY Name				
	Fig.	P/n	QTY	Name

Notes:

[XB 105 TB ->ZKDCR60200TH10001]

30	0.065.1152.0	1	gasket
31	0.007.0623.2	1	cover
32	2.0112.205.2	2	screw m 8 p.1.25 x 16
33	2.0432.003.7	2	stud bolt m 8 p.1.25 / p.1 x 20

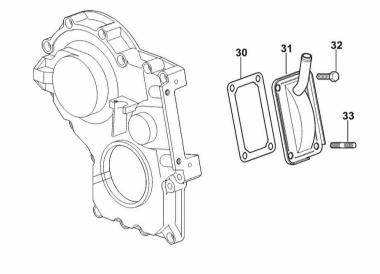

I9_08311_01_0-A-001

Thank you so much for reading. Please click the "Buy Now!" button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email:

ebooklibonline@outlook.com