
Section: D0 - TRANSMISSION PTO PACKAGE WITHOUT GROUNDSPEED

Ref: D0.09.6 (1)

PTO PACKAGE WITHOUT GROUNDSPEED

Fig.	P/n	QTY	Name		
Notes:					
[XM 130 T4	4i V-DRIVE]				

1	0.018.7501.0	1	cover
2	2.1539.025.0/10	1	special oil seal 88.57 x 2.62

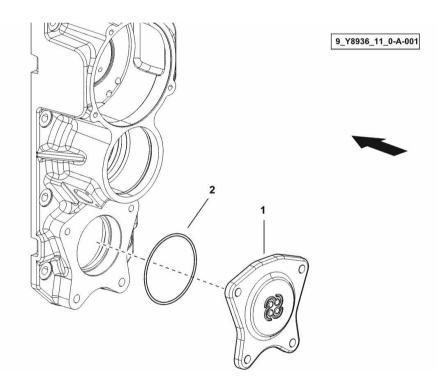


Ref: D0.10.0 (1)

CONTROL FOR HEAVY DUTY RANGE REDUCTION GEAR


Section: D0 - TRANSMISSION

Fig.	P/n	QTY	Name
Notes: [XM 130 T	'4i V-DRIVE]		
26	0.018.4916.0/10	1	fork
27	2.0399.019.1	1	screw m 8 p.1 x 16
28	0.016.0604.0	1	rod
29	2.2999.156.0	1	ball Ø 10
30	2.4019.622.1	1	spring 6.3 x 9.5 x 1.6 x 22.4
31	2.1560.008.0	1	gasket 12.2 x 18
32	2.3199.164.2/20	1	plug m 12 p.1.5

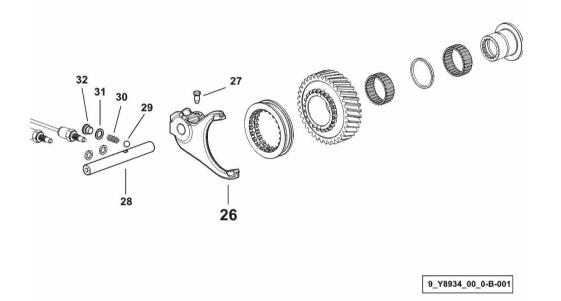

Section: D0 - TRANSMISSION Ref: D0.10.1 (2) CONTROL FOR HEAVY DUTY RANGE REDUCTION GEAR

Fig.	P/n	QTY	Name
Notes:			
[XM 1307	Γ4i V-DRIVE]		
6	2.1475.102.2	4	washer 8.4 x 16
7	2.0112.219.2	4	screw m 8 p.1.25x55
8	0.018.5099.0/10	1	support
9	0.018.7554.0	1	lever
10	2.2725.030.0	2	roller cage 22 x 28 x 16
11	2.1530.129.0	1	oil seal 52.07x2.62
12	2.1423.019.7	1	ring 28
13	2.1532.091.0	1	ring 34.60 x 2.62
14	0.018.7557.0/10	1	support
15	2.1655.305.0	1	pin
16	2.1519.075.0	1	oil seal 22 x 35 x 6
17	0.016.0583.3	1	lever
18	2.1011.406.2	1	nut m 10 p.1
19	2.0399.050.2	1	screw m 10 p.1 x 30

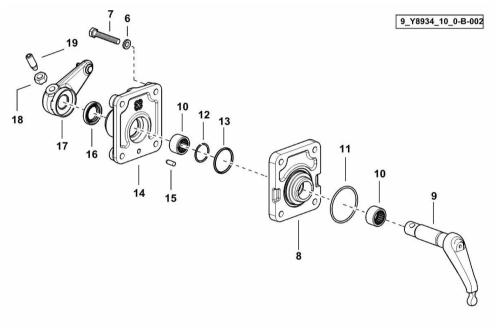

Ref: D0.11.0 (1)

RANGE REDUCTION GEAR - HEAVY DUTY

P/n	ΟΤΥ	Name

Notes: [XM 130 T4i V-DRIVE]

Fig.

Section: D0 - TRANSMISSION

$ \begin{array}{c} 22 \\ 24 \\ 37 \\ 25 \\ 25 \\ 37 \\ 36 \\ 37 \\ 4 \\ 37 \\ 6 \\ 9 \\ 10 \\ 9 \\ 10 \\ 10 \\ 10 \\ 10 \\ 10 \\ 10 \\ 10 \\ 10$
8 7 6 9_Y8934_00_0-A-001

0.016.0156.0	1	bushing
2.2770.245.0	2	roller cage
2.1549.413.0	1	spacer 47x52.8x4
0.016.0155.0/10	1	gear Z = 36
0.014.3116.0/10	1	sleeve
0.016.0154.0	1	hub
2.1412.013.7	1	ring Ø 35
0.016.0168.0	1	ring
2.1411.042.7	2	circlip 110
2.2040.016.0	2	ball bearing
2.1423.030.7	1	circlip 40
2.1549.648.0	1	spacer 32x40x7.5
2.2999.452.0	1	roller cage
0.018.6589.0/10	1	gear Z = 24
2.1530.082.0	1	oil seal 31.34 x 3.53
0.018.6831.0/10	1	sleeve
2.0399.333.0/10	1	screw
0.016.0147.0/20	1	bushing
2.2999.504.0	2	roller cage
0.016.0145.0/10	1	gear
0.016.0148.0/20	1	pin
2.1411.030.7	1	circlip 75x2.5
2.1532.024.0	1	oil seal 10.77x2.62
2.3249.715.2/10	1	pipe fitting m 16x1.5
2.1560.012.0	1	gasket 16.2 x 22
2.1530.114.0	1	oil seal 44.45x3.53
2.1549.200.0/10	1	spacer
2.1423.039.7	1	circlip
		-

Ref: D0.11.1 (1)


Section: D0 - TRANSMISSION BEVEL WHEEL GEAR

F	ig.	P/n	QTY	Name

Notes: [XM 130 T4i V-DRIVE]

1

0.018.7500.3/20 1 bevel drive z=11 z=62




9_Y8935_00_0-A-001

Ref: D0.11.2 (1)

Section: D0 - TRANSMISSION BEVEL DRIVE PINION BEARING

Fig.	P/n	QTY	Name
Notes: [XM 130 7	[4i V-DRIVE]		
	-		
21	2.1499.061.1	1	circlip 120x3.4
22	2.1499.062.1	1	circlip 120x3.5
23	2.1499.063.1	1	circlip 120x3.6
24	2.1499.064.1	1	circlip 120x3.7
25	2.1499.065.1	1	circlip 120x3.8
26	2.1499.066.1	1	circlip 120x3.9
27	2.1499.067.1	1	circlip 120x4
28	2.1499.068.1	1	circlip 120x4.1
29	2.2999.502.0/10	1	special bearing
30	2.1589.167.0	1	shoulder ring 105 x 112 x 0.15
31	2.1589.168.0	1	shoulder ring 105 x 112 x 0.1
32	2.1589.169.0	1	shoulder ring 105 x 112 x 0.5
33	2.1219.070.1/20	1	ring nut m 45 p.1.5 x 19

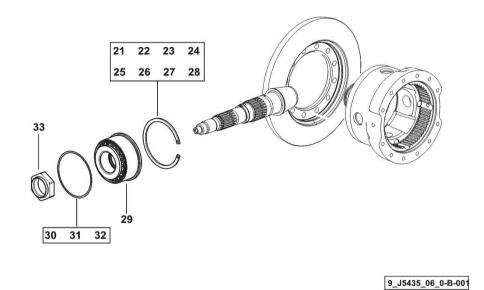


Ref: D0.11.4 (1)

Section: D0 - TRANSMISSION RANGE GEARBOX COMPLETION - 4WD

Fig.	P/n	QTY	Name

Notes: [XM 130 T4i V-DRIVE]

1 0.018.4530.0 1 gear Z = 20

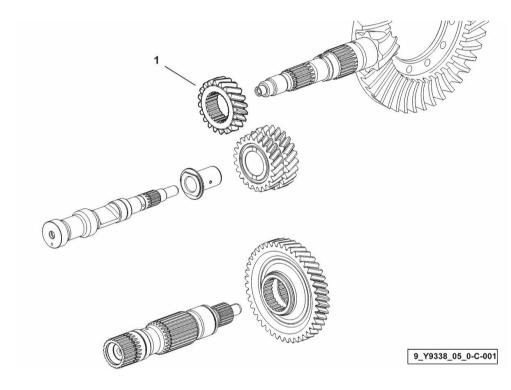


Name

Section: D0 - TRANSMISSION P.T.O. - HYDRAULIC CLUTCH Fig. P/n QTY

Ref: D0.12.0 (1)

Notes: [XM 130 T4i V-DRIVE]

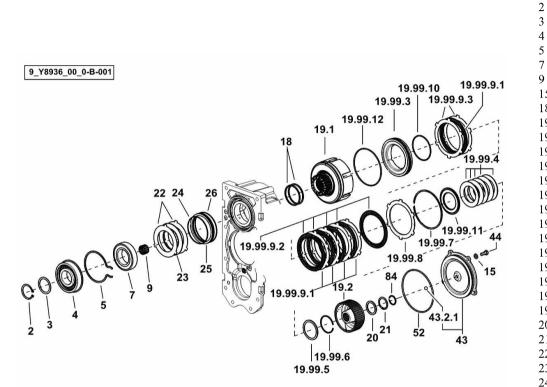

2	2.1410.018.7	1	circlip 45
3	2.1599.541.0	1	shoulder ring 45x55x2
4	2.2062.013.0	1	ball bearing 45x100x25
5	2.1419.125.7	1	circlip 100
7	2.2041.017.0	1	ball bearing 50 x 90 x 20
9	2.2999.312.0	1	roller cage
15	2.1475.002.7	4	washer 8.4
18	2.1499.126.0/10	2	oil seal 62x68x3
19.1	0.019.0622.3	1	box
19.2	0.019.0623.0	1	hub
19.99.3	0.016.9055.0/10	1	piston
19.99.4	2.1499.252.7	5	spring
19.99.5	2.1549.678.0	1	ring
19.99.6	2.1422.036.7	1	circlip
19.99.7	2.1423.127.7	1	circlip 127
19.99.8	0.016.9068.0/10	1	disc
19.99.9.1	0.016.9060.2	6	clutch plate
19.99.9.2	0.013.9453.0	4	disc mm 1.75
19.99.9.3	0.017.9828.0	2	disc mm 1.55
19.99.10	2.1532.505.0	1	oil seal 77.50 x 2.62
19.99.11	0.016.9065.0	1	cup
19.99.12	2.1532.502.0	1	oil seal 120.32x2.62
20	2.1579.130.0	1	slewing ring
21	2.1419.067.0	1	circlip 35 x 1.5
22	0.007.7102.0	2	disc mm 1.5
23	0.008.9946.2	1	clutch plate
24	2.1532.510.0	1	oil seal 88.62x1.78
25	0.013.8039.0/10	1	piston
26	2.1532.511.0	1	oil seal 94.97x1.78
43	0.013.8035.3	1	cover
43.2.1	2.2810.006.0	1	ball 3/8"
44	2.0112.207.2	4	screw m 8 p 1.25 x 20
52	2.1532.236.0	1	oil seal
84	2.1422.022.7	1	circlip 28

Name

Section: D0 - TRANSMISSION HYDRAULIC PUMP CONTROL

ΟΤΥ

Fig.

Notes:

P/n

Ref: D0.13.0 (1)


18-P 40 4 22.7 22.6 ^{22.3} 22.4 22.5 22.2 9_Y8939_00_0-A-001

Notes:			
[XM 130 14	i V-DRIVE]		
1	0.019.0341.0	1	hody
2	2.1655.508.0	2	body pin 10x24
3	0.019.0356.0	2	spacer
4	2.2040.007.0	4	ball bearing 25x52x15
5	0.019.0389.0	2	gear (10007 < -)
5	0.019.0389.0/10	2	gear ($-> 10008$)
6	0.019.0388.3	2	shaft (10007 <-)
6	0.019.0388.3/10	2	shaft ($-> 10008$)
7	2.1411.025.1	2	circlip 62
8	2.2021.011.0	4	bearing
9	0.014.9837.0/20	1	sleeve
10	0.018.0697.0	1	gear
11	0.013.4696.0/10	1	pin
12	2.1530.079.0	1	oil seal 29.82 x 2.62
13	2.2030.007.0	2	ball bearing 30x55x13
14	0.014.4866.0	1	spacer
15	0.013.4695.0	1	gear Z = 50
16	2.1411.022.1	1	circlip 55
17	0.015.6014.0	1	spacer
18	2.0522.307.7	1	screw m 10
19	2.1530.071.0	1	oil seal 26.64x2.62
20	2.1530.134.0	1	oil seal 53.98x3.53
21	2.1539.103.0/10	1	oil seal 101.32 x 1.78
22	0.014.2153.4/10	1	pump
22.2	0.014.2154.0/20	1	cover
22.3	0.009.2229.0/20	1	crown wheel
22.4	0.009.2230.0/20	1	pinion
22.5	2.1539.103.0/10	1	oil seal 101.32 x 1.78
22.6	2.0112.209.2	2	screw m 8 p 1.25 x 25
22.7	2.1475.102.7	2	washer 8
23	2.1410.004.1	1	circlip 16
24	2.1422.022.7	1	circlip 28
25	0.014.2172.0	1	shaft
29	2.1475.102.7	13	washer 8
30	2.0112.221.2	4	screw m 8 p.1.25 x 60
31	2.0112.225.2	2	screw m 8 p.1.25 x 80
32	2.0112.213.2	5	screw m 8 p.1.25 x 35
33	2.0112.235.2	2	screw m 8 p.1.25 x 130
36	0.014.9842.0/10	1	hub
37	0.018.0696.0	1	gear
38	2.1560.017.0	2	gasket 22.2 x 27

Ref: D0.13.0 (1)

Section: D0 - TRANSMISSION HYDRAULIC PUMP CONTROL

Fig.	P/n	QTY	Name
39	2.3120.002.4	2	plug m 22 x 1.5
40	2.1539.173.0	2	special oil seal 47.35x1.78

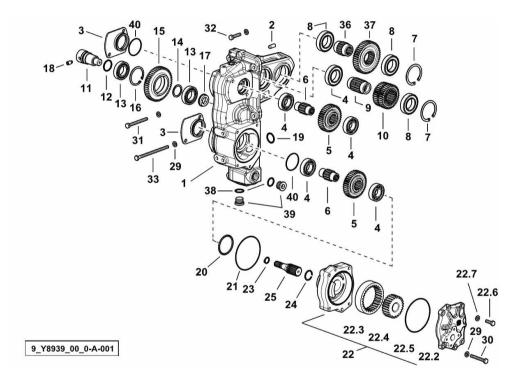

Name

Section: D0 - TRANSMISSION P.T.O. - POWER TAKE OFF

P/n

Ref: D0.14.0 (2)

18¹⁶ 9 Y8936 00 0-A-001 - - - 14.2 -40 27<0 DOO. 81 82 94 95

Notes:	

[XM 130 T4i V-DRIVE]

Fig.

6	2.0112.311.2	2	screw m 10 p.1.5 x 30
14	0.018.5150.3/10	1	box
14.2	2.1890.002.2	2	plug 5
16	2.0112.313.2	2	screw m 10 p.1.5 x 35
17	2.0112.309.2	6	screw m 10 p.1.5 x 25
18	2.1499.126.0/10	2	oil seal 62x68x3
27	2.1531.021.0	2	oil seal 9.66x1.78
40	2.1539.025.0/10	1	special oil seal 88.57 x 2.62
54	0.255.3661.0	1	ring nut m 35x1.5
55	2.2060.011.0	1	ball bearing 35 x 80 x 21
56	2.1599.502.0/10	1	shoulder ring 35x60x3
57	0.015.0269.0/10	1	gear z=58
58	2.1579.129.0	1	spacer 35x45x10.5
59	2.1559.459.0	2	bushing 35x40x30
60	2.2999.218.0	2	roller cage 40 x 45 x 30
61	2.2999.391.0	2	roller cage 55x60x30
62	0.018.7809.0	1	bushing
63	0.013.8018.3	1	hub
64	0.018.4565.0	1	sleeve
65	0.013.8016.0/10	1	hub
68	0.018.7810.3	1	shaft
69	2.2999.204.0	1	special bearing 50 x 90 x 20
70	0.018.8412.0/10	1	bushing
71	0.016.0734.0/10	1	spacer
72	2.1655.505.0	1	pin
77	0.017.1287.0	1	power take-off shaft $Z = 21$
78	0.014.5725.0	1	guard
79	2.1651.811.0	2	cylindrical plug 10x24
80	2.0432.161.7	6	stud bolt m 10 p.1.5 / p.1.25 x 40
81	2.1475.003.2	15	washer 10
82	2.1011.421.2	7	nut m 10 p.1.25
83	0.017.1311.0	1	power take-off shaft $Z = 6$
94	2.1560.009.0	1	gasket 14.2x18
95	2.3120.109.0	1	plug m 14
97	2.0432.167.2	2	stud bolt m 10x1.25x60
99	2.3139.029.2	1	plug

ΟΤΥ

Name


ΟΤΥ

Section: D0 - TRANSMISSION **COMPLETION - 4WD**

P/n

Ref: D0.14.1 (1)


Fig. Notes: [XM 130 T4i V-DRIVE] bushing 6 0.018.7420.0/10 1 roller cage 32x40x25 7 2.2999.119.0 2 8 0.018.5491.0/10 1 bushing 9 2.1411.018.7 circlip 45 1 10 0.018.4539.3/10 1 pin 11 2.3249.592.2/10 pipe fitting 1

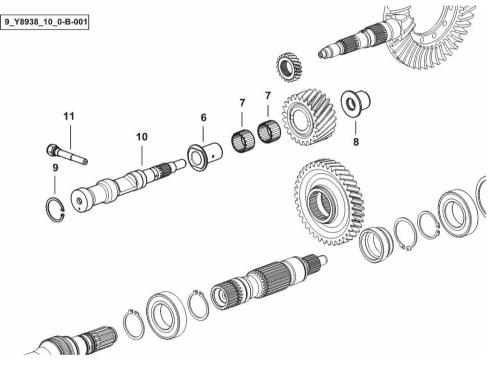

Section: D0 - TRANSMISSION Ref: D0.14.3 (1) COMPLETION - 4WD QTY Name

Notes: [XM 130 T4i V-DRIVE]

2 0.018.4540.0 1 pulley guide

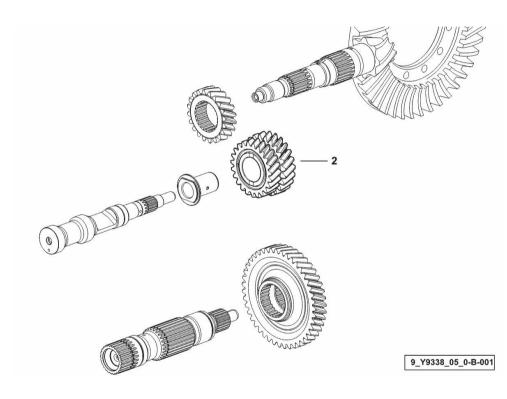


Ref: D0.14.5 (1)

Section: D0 - TRANSMISSION 3-SPEED + GROUNDSPEED PTO

Fig.	P/n	QTY	Name	
Notes:				
[XM 130 T4i V-	-DRIVE]			

3	0.015.0270.0/10	1	gear z = 59
4	0.015.0271.0	1	gear Z = 49

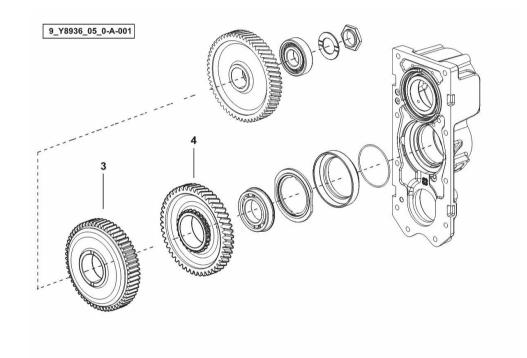


Ref: D0.14.6 (1)

Section: D0 - TRANSMISSION 3-SPEED + GROUNDSPEED PTO

Fig.	P/n	QTY	Name	
Notes:	T4i V-DRIVE]			
[7.07 150				
1	0.018.3731.0	1	shaft	

1	0.018.3731.0	1	shaft
2	0.018.3732.0	1	gear

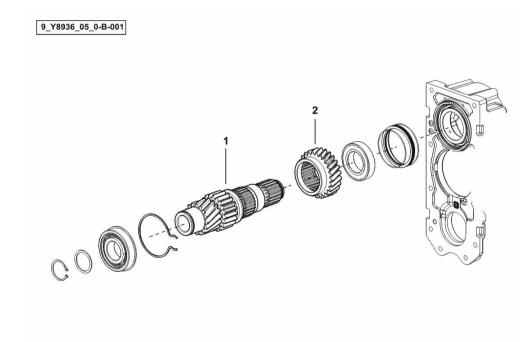

Thank you so much for reading. Please click the "Buy Now!" button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email:

ebooklibonline@outlook.com