48" Front Blade GT65, GT75, GT85 & GT95 Tractors





# 48" FRONT BLADE OPERATOR'S MANUAL P/N 42680150 dated 9/95


### **ASSEMBLY INSTRUCTION CORRECTIONS**

The following corrections and clarifications are necessary to insure the 48 inch Front Blade is set up properly. Follow the infoprmation below, rather than those noted instructions and illustrations in the operator's manual.

#### PAGE 10

#### Step 4 & Center Illustration


4. Assemble the push rod and adjust its length to 22 inches, ± 1/8 inch, from the centerline of the hole in the adjustment stud to the front of the slot in the rod yoke end. Do not tighten jam nut "A" at this time.

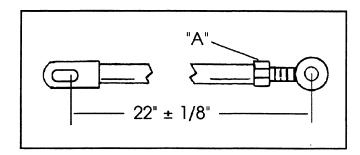

#### PAGE 11

#### Step 1 & Top Illustration

 Fasten the cutting edge/skid bar to the moldboard with the flat edge forward as illustrated with 3/8-16 x 1 carriage bolts, flat and lockwashers and nuts. Adjust the cutting edge to the center of the slots in the moldboard and tighten the fasteners.

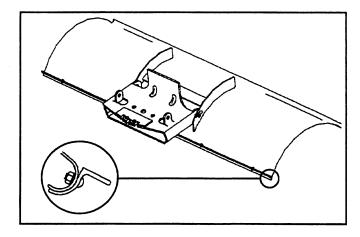

### INTRODUCTION

#### TO THE OWNER & OPERATOR

Congratulations on your decision to purchase a NEW HOLLAND GT Blade. May we recommend you read this manual before operating your 48 inch front mounted blade.

This blade has been designed to give many years of satisfactory service. Successful operation and long life depends on proper maintenance and correct operating technique.

This Operator's Manual has been printed to provide you with safe operating techniques, proper maintenance procedures, correct unit assembly, and parts identification on your blade. Please read this manual carefully, following all instructions. Keep this manual handy for future reference.

All references to right and left, forward or rearward, used in this manual refer to that direction when seated on the tractor seat facing forward.

Should any assistance be required in understanding any section of this manual, contact your NEW HOLLAND Dealer.

#### **IDENTIFICATION NUMBERS**

Locate the Serial Number plate and record the numbers from it on the pictured plate below. Always refer to this information when requesting service repair parts or dealer service.



Contact your NEW HOLLAND Dealer for authorized service parts. Substitute repair parts will void the product warranty, and will not meet the standards required for safe operation.

## — TABLE OF CONTENTS ——

| INTRODUCTION   | 1                     |
|--|-----------------------|
| To the Owner & Operator Identification Numbers   | 1                     |
| SPECIFICATIONS   | 3                     |
| SAFETY PRECAUTIONS   | 4                     |
| The Blade  | 4<br>4<br>4<br>5<br>5 |
| OPERATING INSTRUCTIONS   | 6                     |
| Operating the Blade Blade Control Snow Removal Leveling-Grading-Backfilling Transporting | 6<br>6<br>7<br>7      |
| BLADE REMOVAL & STORAGE  | 8                     |
| Front Blade RemovalStoring the Front Blade   | 8<br>8                |
| ASSEMBLY INSTRUCTIONS  | 9                     |
| Subframe Assembly Sub & Lift Frame Installation  | 9<br>9<br>11          |
| PARTS ILLUSTRATIONS  | 13                    |
| Subframe & Lift Frame Components   | 14<br>16<br>18        |
| PRE-DELIVERY CHECKLIST   | 19                    |
| OWNED ACCICTANCE   | 00                    |

Thank you so much for reading. Please click the "Buy Now!" button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email: ebooklibonline@outlook.com