OPERATOR'S MANUAL

T8.320

T8.350

T8.380

T8.410

T8.435

T8.380 SmartTrax™

T8.410 SmartTrax[™]

T8.435 SmartTrax[™]

Tractor

PIN ZJRE04001 and above



Contents

NOTE: The Operator's Manual consists of two volumes. The first volume contains operating information, the second volume the maintenance and diagnostic information.

| 1 GENERAL INFORMATION | |
|--|-------|
| Note to the owner | 1-1 |
| Engine tampering | 1-2 |
| Intended use | 1-3 |
| Electro-Magnetic Compatibility (EMC) | |
| ISOBUS certification. | |
| Product identification | |
| Operator's manual storage on the machine | |
| Machine orientation | |
| Machine components | |
| 2 SAFETY INFORMATION | |
| Safety rules and signal word definitions | 2-1 |
| Safety rules - General | |
| Safety rules - General maintenance safety | 2-5 |
| Safety rules - Wheels and tires | 2-5 |
| Safety rules - Driving on public roads and general transportation safety | y 2-5 |
| Safety rules - Fire and explosion prevention | - |
| Safety rules - General battery safety | |
| Safety rules - Hydraulic system safety | |
| Safety rules - Instructional seat safety | |
| Safety rules - Operator presence system | |
| Safety rules - Power Take-Off (PTO) | |
| Safety rules - Reflectors and warning lights | |
| Safety rules - Seat belts | |
| Safety rules - Roll Over Protective Structure (ROPS) | |
| Safety rules - Cab protection | |
| Safety rules - Air conditioning system | |
| Safety rules - Personal Protective Equipment (PPE) | |
| Safety rules - Do Not Operate tag | |
| Safety rules - Hazardous chemicals | 2-12 |
| Safety rules - Utility safety | |
| Safety rules - Electrical storm safety | 2-13 |
| Safety rules - Mounting and dismounting | 2-13 |
| Safety rules - Working at heights | 2-13 |
| Safety rules - Lifting and overhead loads | |
| Safety rules - Implements, tools and trailers | 2-14 |
| Safety rules - Roll over and tip over | |
| Ecology and the environment | |
| Safety signs | |
| Informational signs | 2-28 |

| 3 CONTROLS AND INSTRUMENTS | |
|--|------|
| ACCESS TO OPERATOR'S PLATFORM | |
| Tractor access | 3-1 |
| Lower step | 3-3 |
| OPERATOR'S SEAT Control identification | 3-4 |
| | |
| INSTRUCTOR'S SEAT Overview | 2 0 |
| Overview | |
| FORWARD CONTROLS | • • |
| Steering column | |
| Front console | |
| | |
| LEFT-HAND SIDE CONTROLS | |
| Hand brake, if equipped | |
| Pneumatic trailer brake | 3-17 |
| RIGHT-HAND SIDE CONTROLS | |
| Armrest console | |
| Multi function handle | |
| Engine speed control | |
| Control panel | |
| Joystick | |
| Rear hitch controls | |
| Armrest compartment | |
| Adjusting the armrest console | |
| REARWARD CONTROLS | |
| Fender console | 3_42 |
| Automatic temperature controls | 3-46 |
| Automatic temperature control system | |
| Ventilation | |
| OVERHEAD CONTROLS | |
| Interior lamps | 3-52 |
| | |
| EXTERIOR CONTROLS | 0.50 |
| Rear fenderFront hitch | |
| INSTRUMENT CLUSTER | |
| Overview | |
| Gauges | 3-57 |

| | Status and warning icons | |
|---|---|-------|
| | Upper display | |
| | Lower display | |
| | Keypad | |
| | Setup menu | |
| | Rear tire radius and track radius charts | |
| | Adjust menu Performance features | |
| | renormance realures | 3-03 |
| 1 | OPERATING INSTRUCTIONS | |
| • | | |
| | COMMISSIONING THE UNIT Engine - Safety rules | 11 |
| | Eligilie - Salety fules | . 4-1 |
| | | |
| | STARTING THE UNIT | |
| | Normal engine starting | |
| | Cold starting aids | |
| | Cold temperature operation | 4-10 |
| | | |
| | STOPPING THE UNIT | |
| | Stopping the engine | 4-12 |
| | | |
| | MOVING THE UNIT | |
| | FULL POWERSHIFT TRANSMISSION | |
| | Powershift transmission | |
| | Best practices for prolonged transmission life | |
| | Inching pedal and throttle | |
| | Powershift transmission controls | |
| | Driving the Powershift vehicle | |
| | Setting default gears | |
| | Ground Speed Management (GSM) | |
| | ECO power mode | |
| | CONTINUOUSLY VARIABLE TRANSMISSION (CVT) | |
| | Introduction | |
| | Auto Command™ brake, pedal and throttle operation | |
| | Auto Command™ controls | |
| | Upper display | |
| | Auto Command™ operation | |
| | Eco-Draft or Shuttle mode | 4-59 |
| | Driving the Auto Command™ transmission | |
| | ECO power mode | |
| | Transmission messages | |
| | POWERSHIFT AND CVT TRANSMISSIONS | |
| | Mechanical Front Drive (MFD) | |
| | Differential lock system | |
| | Suspended axle | |
| | Engine power boost | |
| | | |

| | Constant engine speed 4 | 1-83 |
|---|--|------------|
| | Suspended cab4 | 1-86 |
| | Headland management system 4 | |
| | | |
| | | |
| | PARKING THE UNIT | |
| | Automatic park lock4 | 1-93 |
| | • | |
| | | |
| 5 | TRANSPORT OPERATIONS | |
| | | |
| | ROAD TRANSPORT | - 1 |
| | Tractor warning lamps and Slow Moving Vehicle (SMV) symbol | |
| | Wide transport marker light | 5-2 |
| | Wide transport marker light - Russia only | 5-4 |
| | Turn signal lamps | 5-5 |
| | Safe transport speed | |
| | Implement warning lamps and Slow Moving Vehicle (SMV) symbol | |
| | | |
| | Safety chain | 5-8 |
| | | |
| | SHIPPING TRANSPORT | |
| | Securing the tractor for shipping | 5 0 |
| | Securing the tractor for shipping | 5-9 |
| | | |
| | RECOVERY TRANSPORT | |
| | Safety rules | : 10 |
| | | |
| | Towing the tractor 5 | 0-11 |
| | | |
| a | WORKING OPERATIONS | |
| U | WORKING OF ERATIONS | |
| | GENERAL INFORMATION | |
| | Overview | 6-1 |
| | | |
| | REAR POWER TAKE-OFF (PTO) | |
| | Safety rules | 6-2 |
| | Connecting the Power Take-Off (PTO) | 6-5 |
| | Interchangeable Power Take-Off (PTO) shaft | |
| | Rear Power Take-Off (PTO) operation | |
| | · · · | |
| | Power Take-Off (PTO) fender switch operation | |
| | Auto Power Take-Off (PTO) operation6 | 5-1/ |
| | | |
| | EDONT DOMED TAKE OFF (DTO) | |
| | FRONT POWER TAKE-OFF (PTO) | |
| | Overview 6 | 3-20 |
| | Front Power Take-Off (PTO) operation | 3-21 |
| | | |
| | DEAD LUTOU | |
| | REAR HITCH | |
| | Identification | |
| | Link adjustment6 | |
| | Hitala bish alaggapa adimeterat | 2-20 |
| | Hitch high clearance adjustment 6 | 7-23 |
| | Hitch high clearance adjustment | |

| Sway limiter adjustment | 6-34 |
|---|----------------|
| Lower link block adjustment | 6-35 |
| Mechanical float adjustment | 6-37 |
| Hitch quick coupler - Category III/IIIN | 6-38 |
| Hitch quick coupler - Category IVN | 6-43 |
| Hitch operation | 6-48 |
| Hitch remote switch operation | 6-53 |
| Position control operation | 6-54 |
| | 6-56 |
| Slip control operation | 6-58 |
| Hitch set point | 6-60 |
| FRONT HITCH | |
| | 6-62 |
| Front hitch operation | 6-63 |
| DRAWBARS AND TOWING ATTAC | CHMENTS |
| Safety rules | 6-70 |
| Drawbar capacity/position | 6-71 |
| Adjusting the drawbar | 6-75 |
| TRAILER HITCHES | |
| Clevis and special drawbars | 6-77 |
| Automatic rotation trailer hitch | 6-79 |
| | 6-82 |
| Manual trailer hitch | 6-84 |
| TRAILER BRAKING SYSTEMS | |
| | 6-86 |
| Trailer brake connections | 6-87 |
| Air pressure monitoring | 6-88 |
| AUXILIARY CONNECTIONS | |
| | |
| | |
| | 6-93 |
| • | 6-94 |
| | 6-95 |
| Telematics | 6-95 |
| HYDRAULIC REMOTE CONTROL | |
| | 6-96 |
| | 6-100 6-101 |
| | |
| | |
| | |
| operating the controls | |

| | Remote valve display screens | 6-108 |
|---|---|--------|
| | Remote hydraulic auto mode | 6-111 |
| | Auto depth control | 6-114 |
| | Joystick operation | 6-116 |
| | | |
| | BALLASTING THE TRACTOR | |
| | Guidelines | 6-120 |
| | Tire load and inflation charts | |
| | Weights, cast metal | |
| | Wheel slip and power hop performance | |
| | | |
| | MECHANICAL FRONT DRIVE (MFD) AXLES | |
| | , | C 474 |
| | Front axle identification Tire combinations and tread positions | |
| | · | |
| | Steering and oscillation stops | |
| | Tread and fender settings - Class 4.75 and 5.0 fixed front axles | |
| | Tread and fender settings - Class 4.75 and 5.0 saddle suspended front axles | |
| | Tread and fender settings - Class 5.0 wide front axles | |
| | Front wheel fenders | |
| | Front wheel narrow fenders - Class 4.75 and 5.0 fixed and suspended axles | |
| | Wide tire fender kit | |
| | Front wheel wide and extra wide fenders - Class 5.0 fixed and suspended axles | |
| | All front wheel fenders – Class 5.0 wide fixed and suspended axles | 0-243 |
| | | |
| | REAR AXLE | |
| | Rear wheel installation | |
| | Rear wheel tread settings | |
| | Dual/triple wheel setup for 508 mm (20 in)/559 mm (22 in) row spacing | |
| | Adjustable rear wheel | 6-268 |
| | | |
| | REAR TRACKS | |
| | Tire load and inflation charts Tractors with rear tracks | 6-270 |
| | Maximum front ballast recommendations | 6-273 |
| | Track preconditioning | |
| | Factory and field track settings | 6-276 |
| | | |
| 7 | MAINTENANCE | |
| | GENERAL INFORMATION | |
| | Safety rules | 7-1 |
| | Maintenance guidelines | |
| | Opening the hood | |
| | Closing the hood | |
| | 5 | |
| | Filling the fuel tank | |
| | Battery disconnect switch | |
| | Battery access and service | |
| | Tire and rim service Tractor jacking points | |
| | riadioi jadiing pointo | . ,-12 |

| Capacities | . 7-14 |
|---|--------------------|
| Consumables - Engine oil | . 7-15 |
| Consumables - Transmission/hydraulic system fluid | . 7-16 |
| Consumables - Diesel fuel | |
| Consumables - Organic Acid Technology (OAT) coolant | . 7-18 |
| Maintenance chart notes | |
| Maintenance summary decal | . 7-21 |
| | |
| Maintenance planning | |
| Maintenance chart | . 7-22 |
| At warning message display | |
| Air filter service icon/message* | . 7-24 |
| Water in fuel message | |
| Transmission oil filter switch | |
| Hydraulic oil filter switch | |
| | |
| First 10 to 50 hours | |
| Wheel bolt torque | |
| Weight bolt torque | . 7-37 |
| Differential and planetary oil | . 7-38 |
| | |
| Every 10 hours or daily | |
| Engine oil level | . 7-39 |
| Transmission oil level | . 7-40 |
| Engine coolant level | |
| Air reservoir | . 7-41 |
| Rear hitch and front axle | . 7-41 |
| Firem, 50 become an organish. | |
| Every 50 hours or weekly | |
| Engine auxiliary fuel filter | . 7-42 |
| E: 1400 l | |
| First 100 hours or at warning message | |
| Transmission and regulated system oil filters | . 7-44 |
| First 400 barre | |
| First 100 hours Powershift transmission clutch calibration | 7 45 |
| Powershill transmission dutch calibration | . 7-45 |
| Every 100 hours | |
| Front hitch | 7 51 |
| Front Power Take-Off (PTO) drive shaft | 7-53 |
| Input shaft for the front Power Take-Off (PTO) dropbox | |
| πρατοπαιτίοι της ποιττίονοι τακο-οπ (ε το) αιορυόλ | . ı-J 1 |
| Every 200 hours | |
| Track alignment | 7 EG |
| Hack allylillelit | . 1-30 |

| Every 300 hours | |
|--|---------|
| Battery water level (Note B) | 7-57 |
| Engine air intake and exhaust hoses | 7-59 |
| Engine coolant level - deaeration tank | 7-61 |
| Weight bolt torque | 7-62 |
| Front axle (Note A) | 7-63 |
| Rear hitch (Note A) | 7-65 |
| Fuel tank | |
| Differential and planetary oil level (Note B) | |
| Transmission oil pressure | 7-69 |
| Front Power Take-Off (PTO) oil level | 7-70 |
| Every 400 hours | |
| Cab air filter* | 7-71 |
| Every 600 hours | |
| Engine oil and filter* | 7-74 |
| Engine coolant antifreeze protection | |
| Engine coolant hoses and clamps | |
| Engine fuel filter* | |
| Engine auxiliary fuel filter* | |
| Fuel system bleeding | |
| Changeable Power Take-Off (PTO) internal splines | 7-85 |
| Engine air precleaner* | 7-86 |
| Every 1000 hours or annually | |
| Pneumatic brake system dryer | 7-87 |
| Powershift transmission clutch calibration | |
| Front Power Take-Off (PTO) oil and filter* | |
| Front Power Take-Off (PTO) dropbox oil | |
| Fuel tank breather | 7-97 |
| Every 1200 hours or annually | |
| Differential and planetary oil | 7-98 |
| Engine air filters* | |
| Every 1500 hours | |
| Transmission oil | 7-105 |
| Regulated system oil filter* | |
| Main transmission oil filter* | |
| Idler/roller wheel oil | |
| Engine crankcase filter* | / - 111 |

| Every 3000 hours | |
|--|-------|
| Engine valve adjustment (Note C) | 7-115 |
| Every 4000 hours or every four veers | |
| Every 4000 hours or every four years | 7.440 |
| Engine coolant | |
| As required | |
| Vehicle fire prevention | 7-118 |
| Track inspection and bolt torque | |
| Track rotation | |
| Track drive wheel and idler bolt torque | |
| Track tension release | 7-120 |
| Track alignment | |
| Cab air filter*Grille screen and radiator area | |
| Transmission clutch and accumulator | |
| Tire pressure | |
| Fan belt | 7-130 |
| Remote valve collection bottle | |
| Remote valve couplers | |
| Cab fabric and carpetSeat belt | |
| | |
| Fuse and relay locations | |
| Electrical component location | 7-139 |
| CTODACE | |
| STORAGE | 7 145 |
| Preparing for storage | |
| Removal from storage | 7-140 |
| ELECTRICAL SYSTEM | |
| Radio or audio system | |
| Battery removal and installation | |
| Auxiliary battery connections | |
| Headlight | |
| LED work lights | |
| Grille work light | |
| Fender tail light and warning light | |
| Roof warning light | |
| Work light | |
| High intensity work light | |
| Wide transport marker light | |
| Rotating beacon light | |
| Interior light | 7-159 |

8 TROUBLESHOOTING

| ALA | ARM(S) | |
|-------|---|------|
| | Display warnings overview | 8-1 |
| | Display warnings - Level 1 | |
| | Display warnings - Level 2 | |
| | Display warnings - Level 3 | |
| | Display warnings - Level 4 | |
| SYI | MPTOM(S) | |
| | Engine symptoms | 8-10 |
| | Transmission symptoms | |
| | Hydraulic symptoms | |
| | Hitch symptoms | |
| | Brake symptoms | |
| | Cab environment symptoms | |
| | Electrical power system symptoms | 8-16 |
| 9 SPF | ECIFICATIONS | |
| | ine specifications | 9-1 |
| • | ver train specifications | |
| | erating speeds - Wheeled tractors | |
| Ope | erating speeds - SmartTrax™ tractors | 9-7 |
| Max | kimum angle (tilt) of operation | 9-9 |
| Vehi | icle dimensions and shipping weight - Wheeled tractors | 9-10 |
| Vehi | icle dimensions and shipping weight - SmartTrax™ tractors | 9-17 |
| Maxi | kimum operating weight | 9-20 |
| 10 AC | CCESSORIES | |
| _ | ming system displays | 10-1 |
| | ar view mirrors | |
| | emical tank mounting | |
| | der connection and operation | |
| Gen | neral accessories | 10-7 |

1 - GENERAL INFORMATION

Note to the owner

This manual contains important information about the safe operation, adjustment and routine maintenance of your T8. or T8. **SmartTrax™** series tractor. The manual is divided into 10 chapters as outlined in the table of contents. Refer to the index at the end of this manual for locating specific items about your tractor.

Do NOT operate or permit anyone to operate or service this machine until you or the other persons have read this manual. Use only trained operators who have demonstrated the ability to operate and service this machine correctly and safely.


All persons who will be operating this machine shall possess a valid local vehicle operating permit and/or other applicable local age work permits.

Tractors equipped with rear tracks

On SmartTrax[™] models, refer to the information starting on page Operating speeds - SmartTrax[™] tractors for transport speed weight limitations.

This Operator's Manual is to be stored in the manual compartment behind the operator's seat in the vehicle. Make sure this manual is in good condition. Contact your dealer to obtain additional manuals.

Your NEW HOLLAND dealer will instruct you in the general operation of your new equipment. Your dealer's staff of factory-trained service technicians will be glad to answer any questions that may arise regarding the operation of your machine. They will also provide any after-sales service you may need, and genuine NEW HOLLAND parts, your guarantee of quality and match.

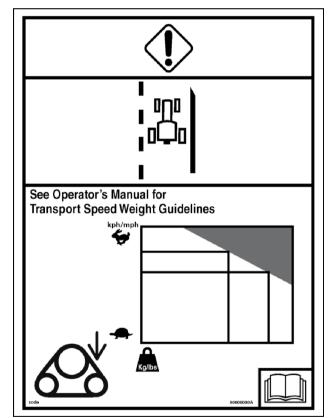

RAIL14TR03870BA

Engine tampering

The fuel system and engine on your machine are designed and built to government emissions standards. Tampering by dealers, customers, operators, and users is strictly prohibited by law.

Failure to comply could result in government fines, rework charges, invalid warranty, legal action, and possible con-

fiscation of the machine until rework to original condition is completed. Engine service and/or repairs must be done by a certified technician only!

Intended use

T8. or T8. SmartTrax™ series tractors, with standard equipment and authorized attachments, are intended to be used for customary farming, land leveling and related agriculture operations (intended use). Installation of utility (dozer) blades, tile plows, or push bars on the tractor is not recommended. Any tractor damage resulting from the installation and/or use of such equipment is not covered by the tractor warranty.

Consult an authorized dealer or CNH Industrial America LLC on changes, additions or modifications that can be required for this machine to comply with various regulations and safety requirements. Unauthorized modifications will cause serious injury or death. Anyone making such unauthorized modifications is responsible for the consequences.

The tractor is not designed for light/heavy forestry applications; usage is prohibited for forestry applications.

Do not use this machine for any purpose or in any manner other than as described in the manual, decals, or other product safety information provided with the machine. These materials define the machine's intended use.

Use in any other way is considered as contrary to the intended use. The manufacture accepts no liability for any damage or injury resulting from this misuse and these risks must be born solely by the user.

Thank you so much for reading. Please click the "Buy Now!" button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email: ebooklibonline@outlook.com