
OPERATOR'S MANUAL

T5.95

T5.105

T5.115

Tractor

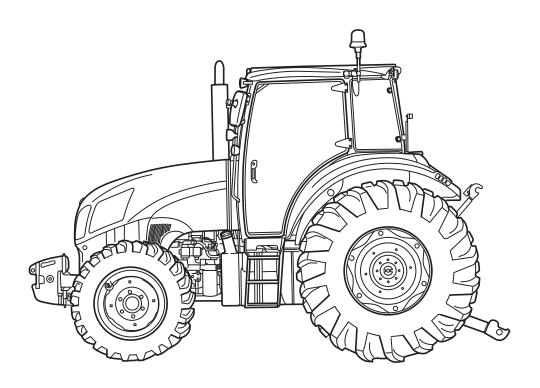

Part number 84495713 Ist edition English May 2012



Contents

ı	GENERAL INFORMATION	
	Note to the Owner	
	Proposition 65	
	Electro-magnetic interference (EMC)	
	International symbols	
	Introduction	1-6
	Operator's manual storage	
	Tractor intended use	
	Ecology and the Environment	
	Identification plates	
	Approval data plate	
	Component identification	. 1-13
2	SAFETY INFORMATION	0.4
	Safety rules and signal word definitions	
	Safety information	
	Air conditioning safety regulations	
	Vehicle vibration levels	2-7
	Cab guard Personal protective equipment (PPE)	
	Tractor jacking points	
	Hazardous chemicals	
	Burn prevention.	
	Getting in and out of the machine	
	Wheel chocks	
	Safety signs	
3	CONTROLS/INSTRUMENTS	
	ACCESS TO OPERATOR'S PLATFORM	
	General Information	3_1
	Cab	
	Heating, ventilation or air-conditioning control	3-6
	OPERATOR'S SEAT	
	Standard seat	3-8
	Air seat "DELUXE" model	3-9
	Air seat "PREMIUM" model	
	Seat belt	. 3-14
	INSTRUCTOR'S SEAT	0.45
	Instructor's seat	. 3-15
	FORWARD CONTROLS	0.45
	Instrument panel	
	Front controls	. 3-21

	LEFT-HAND SIDE CONTROLS Console Left-hand console - Localisation overview	
	RIGHT-HAND SIDE CONTROLS Console Right-hand console - Localisation overview	3-26
	EXTERIOR CONTROLS Cab controls - Control identification	3-29
	DISPLAY SETTINGS Programmable display. Adjusting the dashboard/display brightness. Calibrating speed. Calibrating tool width Programming maintenance work Activating/deactivating buzzer. Setting units of measurement Manually regenerating the diesel particulate filter (DPF) Resetting the oil change counter Viewing error codes	3-31 3-33 3-35 3-36 3-38 3-39 3-40 3-45
4 (OPERATING INSTRUCTIONS COMMISSIONING THE UNIT Basic operating safety rules	. 4-1
4 (COMMISSIONING THE UNIT	. 4-3
4 (COMMISSIONING THE UNIT Basic operating safety rules STARTING THE UNIT Starting the engine	. 4-3 . 4-5

5 TRANSPORT OPERATIONS

ROAD TRANSPORT Transporting the machine	5-1
RECOVERY TRANSPORT Towing the tractor	5-1
6 WORKING OPERATIONS	
2WD or 4WD Four-wheel drive with electro-hydraulic control	6-1
DIFFERENTIAL LOCK Differential lock hydraulic control - Operating	6-2
REMOTE VALVES General safety rules	6.3
Operation	
Configurable valves with detent	
Single/double action hydraulic valves	
POWER TAKE OFF (PTO)	
Safety rules	
General	
ELECTRONICALLY CONTROLLED HYDRAULIC LIF	
Safety precautions	
Header/Attachment height system - Operating Operating Instructions	
THREE POINT HITCH	
Three-point linkage	6-27
Three-point linkage	
Additional equipment attachment points	6-33
TOWBAR	0.24
Safety rulesSwinging drawbar	
Swinging drawbar	
MAXIMUM PERMITTED LOADS Front and rear axle	6-35
WHEELS AND TIRES	
Wheels and tires	6-37

	Tyre dimensions	6-41
WH	EEL TRACK ADJUSTMENT Track adjustment Adjustment of the front mudguards Adjustment of the steering angles Tire combinations and tread positions	6-42 6-43
BAL	LAST Safety rules Metal ballast Liquid Ballast	6-46 6-46
7 MAIN	NTENANCE	
G Ir V B F B O	NERAL INFORMATION General safety before you service Introduction Garious controls Garious c	. 7-3 . 7-4 . 7-5 . 7-6 . 7-7 . 7-8 7-10
	NTENANCE CHART Iaintenance Chart	7-12
R A H D R B C C	required Radiator expansion tank Vindscreen washer tank Lir conditioning - Dehydration filter Randbrake Distributor oil recovery pan Radiator - Check Lirakes - Adjust Clutch adjustment Compressor belt Rachine lights Syre pressure	7-14 7-15 7-15 7-15 7-16 7-16 7-17
D B	varning message display Ory air filter - External cartridge Trake fluid level uel filter water drain	7-18

Engine oil level	7-20
Every 50 hours	
Rear wheel hub	7-21
Lift and linkage	7-21
Front axle	7-21
Every 100 hours	
Air conditioning condenser	7-22
Transmission oil heat exchanger Models with hydrostatic transmissions only	7-22
Intercooler	
Cab air filters	7-23
Cab recirculated air filter	7-23
Every 300 hours	
Hydraulic circuit oil filter	7-24
Auxiliary services oil filter	7-24
Dry air filter - External cartridge	
Alternator belt	
Transmission and hydraulic lift	7-26
Front Axle Oil	7-26
Front axle final drives	
Front axle spindle	
Towing hitch	
Battery electrolyte level	7-27
Every 600 hours	
Change engine oil and filter	7-28
Replacing the fuel filters	7-29
Fuel prefilter	
Wheel bolt torque	
Every 1200 hours or annually	
Replacing cab air filters	7 31
Replacing air filters	
Fuel tank	
Every 1200 hours or two years	
Replacing front axle final drive oil	7-32
Engine valve adjustment	
Replacing transmission oil	
Washing cooling system	
1800 hours Service	

Fuel Injectors - Check	-35
Every 3000 hours Diesel particulate filter (DPF)	-35
ELECTRICAL SYSTEMBattery service	-37 -38 -44
STORAGE Tractor storage	-45
FLUIDS AND LUBRICANTS Lubrication system - Change fluid	-46
PTO Clutch calibration	-50
8 TROUBLESHOOTING	
FAULT CODE RESOLUTION TROUBLESHOOTING ENGINE Electrical system - Troubleshooting ELECTRICAL SYSTEM Hydraulic systems - Troubleshooting HYDRAULIC SYSTEM Rear three-point hitch - Troubleshooting HYDRAULIC LIFT AND 3-POINT LINKA	8-4 GE 8-5
Cab climate control - Troubleshooting	
ALARM(S) Alarms Display warnings overview	
SYMPTOM(S) Viewing error codes	-13

9 SPECIFICATIONS

Dimensions and weights	9-1
Technical data	9-3
10 ACCESSORIES	
Radio	10-1
Front-end loader	
Joystick for control valves	10-10
Hydraulic valve for trailer brakes	
Trailer brake connections	10-13

1 - GENERAL INFORMATION

Note to the Owner

This manual contains information concerning the adjustment and maintenance of your new equipment. You have purchased a dependable machine, but only by proper care and operation can you expect to receive the performance and long service built into this equipment. Please have all operators read this manual carefully and keep it available for ready reference.

Your NEW HOLLAND AGRICULTURE dealer will instruct you in the general operation of your new equipment. Your dealer's staff of factory-trained service technicians will be glad to answer any questions that may arise regarding the operation of your machine.

New Holland Top Service is also available. Call 1-866-NEWHLND (1-866-639-4563) or email: na.topservice@cnh.com.

Your NEW HOLLAND AGRICULTURE dealer carries a complete line of genuine NEW HOLLAND AGRICULTURE service parts. These parts are manufactured and carefully inspected to insure high quality and accurate fitting of any necessary replacement parts. Be prepared to give your dealer the model and product identification number of your new equipment when ordering parts. Locate these numbers now and record them below. Refer to the 'General Information' section of this manual for the location of the model and product identification numbers of your machine.

PLEASE RECORD THE FOLLOWING INFORMATION

Model:

Product Identification Number (PIN):



This is the safety alert symbol. It is used with and without signal words to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible death or injury.

▲ WARNING

Illustrations in this manual may show protective shielding open or removed to better illustrate a particular feature or adjustment.

Replace all shields before operating the machine.

Failure to comply could result in death or serious injury.

W0012A

Engine tampering statement:

ATTENTION: The fuel system and engine on your machine are designed and built to government emissions standards. Tampering by dealers, customers, operators and users is strictly prohibited by law. Failure to comply could result in government fines, rework charges, invalid warranty, legal action and possible confiscation of the machine until rework to original condition is completed. Engine service and/or repairs must be done by a certified technician only!

Improvements

CNH America LLC is continually striving to improve its products. We reserve the right to make improvements or changes when it becomes practical and possible to do so, without incurring any obligation to make changes or additions to the equipment sold previously.

Proposition 65

CALIFORNIA Proposition 65 Warning

Diesel engine exhaust and some of its constituents are known to the State of California to cause cancer, birth defects and other reproductive harm.

Battery posts, terminals and related accessories contain lead and lead compounds.

Wash hands after handling.

Electro-magnetic interference (EMC)

Interference may arise as a result of add-on equipment which may not necessarily meet the required standards. As such interference can result in serious malfunction of the unit and/or create unsafe situations, you must observe the following:

- The maximum power of emission equipment (radio, telephones, etc.) must not exceed the limits imposed by the national authorities of the country where you use the machine.
- The electro-magnetic field generated by the add-on system should not exceed **24 V/m** at any time and at any location in the proximity of electronic components.
- The add-on equipment must not interfere with the functioning of the on board electronics.

Failure to comply with these rules will render the [brand] warranty null and void.

International symbols

TYPICAL	RECOMMENDED SI (METRIC) UNITS		IMPERIAL UNIT	
APPLICATIONS	NAME	SYMBOL	NAME	SYMBOL
			•	
AREA				
	hectare	ha	acre	ha
	square meter	m²	square foot	ft²
			square inch	in²
	square millimetre	mm²	square inch	in²
ELECTRICITY				
	ampere	Α	ampere	Α
	volt	٧	volt	V
	microfarad	μF	microfarad	μF
	ohm	Ω	ohm	Ω
FORCE				
	kilonewton	kN	pound	lb
	newton	N	pound	lb
FORCE PER LENGT				
	Newton metres	Nm	pound inch	lb in
FREQUENCY				
	megahertz	MHz	megahertz	MHz
	kilohertz	kHz	kilohertz	kHz
	hertz	Hz	hertz	Hz
FREQUENCY - ROTA				
	revolution per minute	r/min	revolution per minute	r/min ^a
		rpm		rpm
LENGTH	T	-	_	
	kilometre	km	mile	mi
	meter	m	foot	ft
	centimetre	cm	inch	in
	millimetre	mm	inch	in
	micrometer	μm		
MASS	T	Т.	T .	T
	kilogram	kg	pound	lb
	gram	g	ounce	OZ
	milligram	mg		
POWER	T	T	T.	1
	kilowatt	kW	horsepower	Нр
	watt	W	Btu/hour	Btu/hr
		• •	Btu/minute	Btu/min
PRESSURE or STRE	SS (FORCE PER ARE	,	1	1 -
	kilopascal	kPa	pound per square inch	
		T	inch of mercury	inHg
	pascal	Pa	inch of water	inH2O
	megapascal	MPa	pound per square inch	psi

1 - GENERAL INFORMATION

TYPICAL	RECOMMENDED SI (METRIC) UNITS		IMPERIAL UNIT	
APPLICATIONS	NAME	SYMBOL	NAME	SYMBOL
TEMPERATURE (other than THERMODYNAMIC)				
	degrees Celsius	°C	degrees Fahrenheit	°F
TIME	ī			
	hour	h	hour	h
	minute	min	minute	min
	second	S	second	S
TORQUE (includes BE			d MOMENT OF A COU	
	newton meter	N m	feet-pounds	lb ft
			inch-pound	lb in
VELOCITY				
	kilometre per hour	km/h	mile per hour	mph
	meter per second	m/s	foot per second	ft/s
	millimetre per second	mm/s	inch per second	in/s
	meter per minute	m/min	foot per minute	ft/min
VOLUME (includes CA	APACITY)			
	cubic meter	m³	cubic yard	yd³ (cu yd)
	litre		cubic inch	in ³
	litre	I	US gallon	US gal
			U.K. gallon	UK gal
			US quart	US qt
			U.K. quart	UK qt
	millilitre	ml	fluid ounce	fl oz
VOLUME PER TIME (includes DISCHARGE	and FLOW RATE)		
	cubic meter per	m³/min	cubic foot per minute	ft³/min
	minute .		·	
	litre per minute	I/min	US gallon per minute	
	millilitre per minute	ml/min	UK gallon per minute	UK gal/min
SOUND POWER LEV	EL and SOUND PRES	SURE LEVEL		
	decibel	dB	decibel	dB

Introduction

About this manual

▲ DANGER

Improper operation or service of this machine can result in an accident.

Do not operate this machine or perform any lubrication, maintenance, or repair on it until you have read and understood the operation, lubrication, maintenance, and repair information.

Failure to comply will result in death or serious injury.

D0010A

This manual gives information for use of your machine, as intended and under the conditions foreseen by the manufacturer during normal operat ion and routine service and maintenance. Read and understand; keep it in good conditions and always safely store it in the provided pocket in the back of your seat for later easy retrieval. This manual does not contain all the information related to periodical service, converting and repairs to be carried out by professional service personnel. The Table of Contents page(s) are proviced to have an overview of main manual's topics. A detailed alphabetic index is available at the end of this manual for locating specific items.

Normal operation

- Normal operation means the use of the tractor for the purpose intended by the manufacturer by an operator familiar with the tractor and the mounted or towed equipment and complying with the information for operation and safe practices, as specified by the manufacturer in this manual and by the decals on the tractor and the equipment.
- Normal operation includes the preparation and storage of the tractor, swinging components into work position and vice versa, adding or removing ballast and picking up and setting off attachments.
- Normal operation includes the adjustment and setting of the tractor and equipment, for the specific condition of the field and/or the crop.

Routine service

Routine service and maintenance means activities that must be done daily by an operator familiar with the tractor characteristics and complying with the information for routine service and safe practices, as specified by the manufacturer in this manual and by decals on the tractor, in order to maintain its proper function. Routine service includes activities such as fueling, cleaning, washing, topping up fluid levels, greasing, replacing of consumable articles such as lamp bulbs.

Converting, periodical service and repair

 Periodical service means activities that must be done at defined intervals by trained personnel familiar with the tractor characteristics and which are complying with the information for periodical service and safe practices, as partly specified by the

- manufacturer in this manual and in other Company literature, in order to maintain the expected life time of the tractor.
- Converting means activities that must be done by professional service personnel familiar with the tractor characteristics and complying with the information for converting, as partly specified by the manufacturer in this manual, in assembly instructions or in other Company literature, in order to fit the tractor to a specific configuration.
- Repair means activities that must be done by professional service personnel only familiar with the tractor characteristics and complying with the information for repair, as specified by the manufacturer in the dealer's workshop manual, in order to restore the proper function of the tractor after a failure or degradation of performance.

Spare Parts

"Non-original" spare parts have not been tested or authorised by the Manufacturer. Installment and/or use of such products may adversely affect the tractor's design specifications, thereby compromising operational safety. The manufacturer cannot be held responsible for any damage resulting from the use of "non-original" spare parts. No modifications may be made to the tractor without written authorisation from the Manufacturer.

Warranty

The tractor is guaranteed in accordance with current legislation in your country and in line with contractual agreements reached with the dealer at the time of sale. However, the warranty is no longer valid if the rules and instructions for the use and maintenance of the tractor, described in this Manual, are not observed.

Cleaning the tractor

Your tractor is an advanced machine, fitted with an electrohydraulic control system. Care must be taken when cleaning the tractor, especially if a pressurized water cleaner is used.

Never stand too close to the tractor or direct the water jet on electrical components, seals or intake openings, etc. Never direct jets of cold water at the hot engine or exhaust. Thank you so much for reading. Please click the "Buy Now!" button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email: ebooklibonline@outlook.com