# **OPERATOR'S MANUAL**

T8.275

T8.300


T8.330

T8.360

T8.390

**Tractor** 

from PIN ZBRC07000 and after

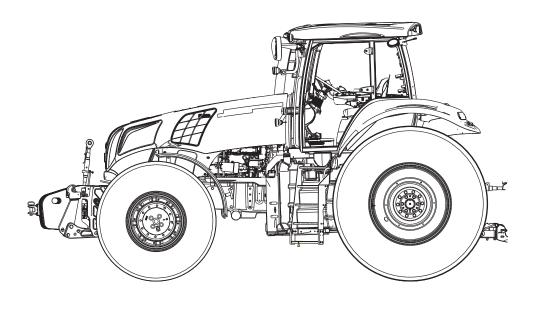

Part number 84516821 1st edition English September 2011



# Contents

1 GENERAL INFORMATION	
	1-1
•	1-2
•	
Component location	
2 SAFETY INFORMATION	
•	
•	
· · · · · · · · · · · · · · · · · · ·	
·	
•	
· · · · · · · · · · · · · · · · · · ·	lers 2-7
	j 2-8
·	า 2-8
· · · · · · · · · · · · · · · · · · ·	
· · · · · · · · · · · · · · · · · · ·	
•	
Safety rules - Wheels and tires	
Roll over protective structure (ROPS)	2-12
Selective catalytic reduction (SCR) deca	al 2-23
Ecology and the environment	
3 CONTROLS/INSTRUMENTS	
ACCESS TO ODEDATODIS F	
ACCESS TO OPERATOR'S F	LATFORIVI 3-1
OPERATOR'S SEAT	
Control identification	3-3

INSTRUCTOR'S SEAT Overview	2.6
Overview	3-0
FORWARD CONTROLS	
Steering column	
Front console	
Pedal controls	3-12
LEFT-HAND SIDE CONTROLS	
Pneumatic trailer brake	3-14
RIGHT-HAND SIDE CONTROLS	
Armrest console	3-15
Multi function handle	
Hand throttle lever	
Control panel	
Remote valve controls	
Joystick	
Rear hitch controls	
Adjusting the armrest console	
Adjusting the armiest console	
REARWARD CONTROLS	
Fender console	3-36
Automatic temperature controls	
Automatic temperature control system	
Ventilation	3-43
OVERHEAD CONTROLS	
Interior lamps	3-45
EVTEDIOD CONTDOLO	
EXTERIOR CONTROLS  Rear fender controls	2.46
Front hitch	
T TOTIC TILLOTT	
INSTRUMENT CLUSTER	
Overview	3-48
Gauges	
Status and warning icons	
Upper display	
Lower display	
Keypad	
Setup menu	3-59
Rear tire radius chart	
Adjust menu	
Performance instrumentation	3-73

4 (	COMMISSIONING THE UNIT	
	Before starting the engine	4-1
	STARTING THE UNIT	
	Normal engine starting	4-4
	Cold starting aids	4-7
	Cold temperature operation	4-9
	Cold temperature operation	4-11
	STOPPING THE UNIT	
	Stopping the engine	4-13
	MOVING THE UNIT	
	Powershift transmission	4-14
	Best practices for prolonged transmission life	
	Inching pedal and throttle	
	Transmission controls	
	Driving the vehicle	
	Setting default gears	
	Ground speed management (GSM)	
	Selective catalytic reduction (SCR) system	
	SCR inducement strategy - 2011	4-37
	SCR inducement strategy - 2012	
	Mechanical front drive (MFD)	
	Differential lock system	
	Suspended axle	
	Ride control Constant engine speed	
	Headland management system	
	ricadiana managoment oyotom	
5 -	TRANSPORT OPERATIONS	
O		
	ROAD TRANSPORT	E 1
	Tractor warning lamps and SMV symbol	
	Tractor warning lamps	
	Safe transport speed	
	Implement warning lamps and SMV symbol	
	Safety chain	
	SHIPPING TRANSPORT	
	Securing the tractor for shipping	5-8

RECOVERY TRANSPORT	
Safety rules	5-9
Towing the tractor	5-10
6 WORKING OPERATIONS	
GENERAL INFORMATION	
Product overview	6-1
REAR PTO	
Safety rules	6-2
Connecting the PTO	6-5
Interchangeable PTO shaft	
Reversible PTO shaft	
Rear PTO operation	
PTO fender switch operation	
Auto PTO operation	6-19
FRONT PTO	
Overview	
Front PTO operation	6-23
REAR HITCH	
Identification	6-26
Link adjustment	
Hitch high clearance adjustment	
Hydraulic links	
Sway limiter adjustment	
Lower link block adjustment	
Mechanical float adjustment	
Hitch quick coupler - Category III/IIIN	
Hitch quick coupler - Category IVN	
Hitch operation	
Hitch remote switch operation  Position control operation	
Load control operation	
Slip control operation	
Hitch set point	
FRONT HITCH	
Overview	
Front hitch operation	b-b2
DRAWBARS AND TOWING ATTACHMENTS	
Rear towing - Safety rules	6-70
Drawbar capacity/position	

AUXILIARY POWER CONNECTIONS Cab power connections	Adjusting the drawbar	6-75
Cab power connections 6-77  HYDRAULIC REMOTE CONTROL VALVES  Valve couplers and connections 6-79  Motor return circuit 6-82 Power beyond circuit 6-83 Flow capacity 6-83 Hydraulic transport lock 6-85 Operating the controls 6-86 Remote valve display screens 6-90 Remote hydraulic auto mode 6-94 Auto depth control 6-96 Joystick operation 6-98  BALLASTING THE TRACTOR Guidelines 6-102 Tire load and inflation charts 6-107 Weights, cast metal and liquid 6-119 Wheel slip and power hop performance 6-131  MECHANICAL FRONT DRIVE (MFD) AXLES Tire combinations and tread positions 6-144 Tread and fender settings - standard MFD axles 6-141 Tread and fender settings - heavy duty MFD axles 6-141 Tread and fender settings - heavy duty class 5 MFD axles 6-141 Tread and fender settings - heavy duty class 5 MFD axles 6-186  REAR AXLE Rear wheel installation 8-186 REAR AXLE Rear wheel installation 8-198 Rear wheel tread settings - 6-201  MAINTENANCE  GENERAL INFORMATION Safety rules 7-2 Opening the hood 7-4 Filling the fuel tank 7-5 Filling the DEF/AdBlue® tank 7-7	ALIXILIARY POWER CONNECTIONS	
Valve couplers and connections       6-79         Motor return circuit       6-83         Power beyond circuit       6-83         Flow capacity       6-83         Hydraulic transport lock       6-85         Operating the controls       6-86         Remote valve display screens       6-90         Remote hydraulic auto mode       6-94         Auto depth control       6-96         Joystick operation       6-98         BALLASTING THE TRACTOR       6-98         Guidelines       6-102         Tire load and inflation charts       6-102         Weights, cast metal and liquid       6-119         Wheel slip and power hop performance       6-131         MECHANICAL FRONT DRIVE (MFD) AXLES         Tire combinations and tread positions       6-134         Steering and oscillation stops       6-141         Tread and fender settings - standard MFD axles       6-144         Tread and fender settings - heavy duty MFD axles       6-149         Tread and fender settings - heavy duty dass 5 MFD axles       6-181         Tread and fender settings - heavy duty dass 5 suspended MFD axles       6-181         Tread and fender settings - scissors suspension MFD axles       6-186         REAR AXLE       6-198		6-77
Valve couplers and connections       6-79         Motor return circuit       6-83         Power beyond circuit       6-83         Flow capacity       6-83         Hydraulic transport lock       6-85         Operating the controls       6-86         Remote valve display screens       6-90         Remote hydraulic auto mode       6-94         Auto depth control       6-96         Joystick operation       6-98         BALLASTING THE TRACTOR       6-98         Guidelines       6-102         Tire load and inflation charts       6-102         Weights, cast metal and liquid       6-119         Wheel slip and power hop performance       6-131         MECHANICAL FRONT DRIVE (MFD) AXLES         Tire combinations and tread positions       6-134         Steering and oscillation stops       6-141         Tread and fender settings - standard MFD axles       6-144         Tread and fender settings - heavy duty MFD axles       6-149         Tread and fender settings - heavy duty dass 5 MFD axles       6-181         Tread and fender settings - heavy duty dass 5 suspended MFD axles       6-181         Tread and fender settings - scissors suspension MFD axles       6-186         REAR AXLE       6-198		
Motor return circuit		6 70
Power beyond circuit	·	
Flow capacity		
Hydraulic transport lock		
Operating the controls         6-86           Remote valve display screens         6-90           Remote hydraulic auto mode         6-94           Auto depth control         6-96           Joystick operation         6-98           BALLASTING THE TRACTOR         6-98           Guidelines         6-102           Tire load and inflation charts         6-107           Weights, cast metal and liquid         6-119           Wheel slip and power hop performance         6-131           MECHANICAL FRONT DRIVE (MFD) AXLES           Tire combinations and tread positions         6-134           Steering and oscillation stops         6-141           Tread and fender settings - heavy duty MFD axles         6-144           Tread and fender settings - heavy duty Class 5 MFD axles         6-161           Tread and fender settings - heavy duty class 5 suspended MFD axles         6-161           Tread and fender settings - scissors suspension MFD axles         6-174           Tread and fender settings - scissors suspension MFD axles         6-186           REAR AXLE         Rear wheel installation         6-198           Rear wheel tread settings         6-201           MAINTENANCE         GENERAL INFORMATION         Safety rules         7-2           Closing the hood		
Remote hydraulic auto mode		
Auto depth control	Remote valve display screens	6-90
BALLASTING THE TRACTOR Guidelines	Remote hydraulic auto mode	6-94
BALLASTING THE TRACTOR  Guidelines Tire load and inflation charts Ge-102 Tire load and inflation charts Wheel slip and power hop performance Ge-119 Wheel slip and power hop performance Ge-131  MECHANICAL FRONT DRIVE (MFD) AXLES Tire combinations and tread positions Ge-134 Steering and oscillation stops Ge-141 Tread and fender settings - standard MFD axles Ge-144 Tread and fender settings - heavy duty MFD axles Ge-149 Tread and fender settings - heavy duty class 5 MFD axles Ge-161 Tread and fender settings - heavy duty class 5 suspended MFD axles Ge-174 Tread and fender settings - scissors suspension MFD axles Ge-186  REAR AXLE Rear wheel installation Rear wheel tread settings Ge-198 Rear wheel tread settings Ge-201  MAINTENANCE  GENERAL INFORMATION Safety rules Opening the hood T-2 Closing the hood T-2 Closing the hood T-4 Filling the Gel-1AdBlue® tank T-5 Battery disconnect switch		
Guidelines	Joystick operation	6-98
Guidelines		
Tire load and inflation charts 6-107 Weights, cast metal and liquid 6-119 Wheel slip and power hop performance 6-131  MECHANICAL FRONT DRIVE (MFD) AXLES  Tire combinations and tread positions 6-134 Steering and oscillation stops 6-141 Tread and fender settings - standard MFD axles 6-144 Tread and fender settings - heavy duty MFD axles 6-149 Tread and fender settings - heavy duty class 5 MFD axles 6-161 Tread and fender settings - heavy duty class 5 suspended MFD axles 6-174 Tread and fender settings - scissors suspension MFD axles 6-186  REAR AXLE Rear wheel installation 6-198 Rear wheel tread settings 6-201  MAINTENANCE  GENERAL INFORMATION Safety rules 7-1 Opening the hood 7-2 Closing the hood 7-2 Closing the hood 7-4 Filling the fuel tank 7-5 Filling the DEF/AdBlue® tank 7-5 Battery disconnect switch 7-7		6_102
Weights, cast metal and liquid	Tire load and inflation charts	6-102
MECHANICAL FRONT DRIVE (MFD) AXLES  Tire combinations and tread positions		
Tire combinations and tread positions       6-134         Steering and oscillation stops       6-141         Tread and fender settings - standard MFD axles       6-144         Tread and fender settings - heavy duty MFD axles       6-149         Tread and fender settings - heavy duty class 5 MFD axles       6-161         Tread and fender settings - heavy duty class 5 suspended MFD axles       6-174         Tread and fender settings - scissors suspension MFD axles       6-186         REAR AXLE       Rear wheel installation       6-198         Rear wheel tread settings       6-201         MAINTENANCE       GENERAL INFORMATION         Safety rules       7-1         Opening the hood       7-2         Closing the hood       7-4         Filling the fuel tank       7-5         Filling the DEF/AdBlue® tank       7-6         Battery disconnect switch       7-7	Wheel slip and power hop performance	6-131
Tire combinations and tread positions		
Steering and oscillation stops 6-141 Tread and fender settings - standard MFD axles 6-144 Tread and fender settings - heavy duty MFD axles 6-149 Tread and fender settings - heavy duty class 5 MFD axles 6-161 Tread and fender settings - heavy duty class 5 suspended MFD axles 6-174 Tread and fender settings - scissors suspension MFD axles 6-186  REAR AXLE Rear wheel installation 6-198 Rear wheel tread settings 6-201  MAINTENANCE  GENERAL INFORMATION Safety rules 7-1 Opening the hood 7-2 Closing the hood 7-2 Filling the fuel tank 7-5 Filling the DEF/AdBlue® tank 7-6 Battery disconnect switch 7-7		
Tread and fender settings - standard MFD axles	·	
Tread and fender settings - heavy duty MFD axles	·	
Tread and fender settings - heavy duty class 5 MFD axles 6-161 Tread and fender settings - heavy duty class 5 suspended MFD axles 6-174 Tread and fender settings - scissors suspension MFD axles 6-186  REAR AXLE Rear wheel installation 6-198 Rear wheel tread settings 6-201  MAINTENANCE  GENERAL INFORMATION Safety rules 7-1 Opening the hood 7-2 Closing the hood 7-4 Filling the fuel tank 7-5 Filling the DEF/AdBlue® tank 7-6 Battery disconnect switch 7-7	<u> </u>	
Tread and fender settings - heavy duty class 5 suspended MFD axles 6-174 Tread and fender settings - scissors suspension MFD axles 6-186  REAR AXLE Rear wheel installation 6-198 Rear wheel tread settings 6-201  MAINTENANCE  GENERAL INFORMATION Safety rules 7-1 Opening the hood 7-2 Closing the hood 7-2 Filling the fuel tank 7-5 Filling the DEF/AdBlue® tank 7-6 Battery disconnect switch 7-7	en de la companya de	
Tread and fender settings - scissors suspension MFD axles 6-186  REAR AXLE Rear wheel installation 6-198 Rear wheel tread settings 6-201  MAINTENANCE  GENERAL INFORMATION Safety rules 7-1 Opening the hood 7-2 Closing the hood 7-4 Filling the fuel tank 7-5 Filling the DEF/AdBlue® tank 7-6 Battery disconnect switch 7-7		
REAR AXLE       Rear wheel installation       6-198         Rear wheel tread settings       6-201         MAINTENANCE         GENERAL INFORMATION         Safety rules       7-1         Opening the hood       7-2         Closing the hood       7-4         Filling the fuel tank       7-5         Filling the DEF/AdBlue® tank       7-6         Battery disconnect switch       7-7		
Rear wheel installation 6-198 Rear wheel tread settings 6-201  MAINTENANCE  GENERAL INFORMATION Safety rules 7-1 Opening the hood 7-2 Closing the hood 7-2 Filling the fuel tank 7-5 Filling the DEF/AdBlue® tank 7-6 Battery disconnect switch 7-7	Tread and fender settings - scissors suspension MFD axies	6-186
Rear wheel installation 6-198 Rear wheel tread settings 6-201  MAINTENANCE  GENERAL INFORMATION Safety rules 7-1 Opening the hood 7-2 Closing the hood 7-2 Filling the fuel tank 7-5 Filling the DEF/AdBlue® tank 7-6 Battery disconnect switch 7-7	ΡΕΔΡ ΔΥΙ Ε	
Rear wheel tread settings 6-201  MAINTENANCE  GENERAL INFORMATION  Safety rules 7-1 Opening the hood 7-2 Closing the hood 7-4 Filling the fuel tank 7-5 Filling the DEF/AdBlue® tank 7-6 Battery disconnect switch 7-7		6-198
GENERAL INFORMATION         Safety rules       7-1         Opening the hood       7-2         Closing the hood       7-4         Filling the fuel tank       7-5         Filling the DEF/AdBlue® tank       7-6         Battery disconnect switch       7-7		
GENERAL INFORMATION         Safety rules       7-1         Opening the hood       7-2         Closing the hood       7-4         Filling the fuel tank       7-5         Filling the DEF/AdBlue® tank       7-6         Battery disconnect switch       7-7		
GENERAL INFORMATION         Safety rules       7-1         Opening the hood       7-2         Closing the hood       7-4         Filling the fuel tank       7-5         Filling the DEF/AdBlue® tank       7-6         Battery disconnect switch       7-7	MAINTENANCE	
Safety rules       7-1         Opening the hood       7-2         Closing the hood       7-4         Filling the fuel tank       7-5         Filling the DEF/AdBlue® tank       7-6         Battery disconnect switch       7-7		
Opening the hood7-2Closing the hood7-4Filling the fuel tank7-5Filling the DEF/AdBlue® tank7-6Battery disconnect switch7-7		7 1
Closing the hood 7-4 Filling the fuel tank 7-5 Filling the DEF/AdBlue® tank 7-6 Battery disconnect switch 7-7		
Filling the fuel tank		
Filling the DEF/AdBlue® tank		
Battery disconnect switch 7-7		

	Fire and rim service     Fractor jacking points	
	Capacities	
	Consumables - Engine oil	
	Consumables - Diesel fuel	
	Consumables - Biodiesel fuels	
Č	Consumables - Diesel exhaust fluid (DEF)/AdBlue®	7-21
	Consumables - Coolant solutions	
	Electrical component location	
	amps and bulbs	
٨	Maintenance chart notes	7-30
ΜΔ	INTENANCE CHART	
1417 (	Maintenance Chart	7-31
•••		
At v	warning message display	
Α	Air filter service icon/message	7-33
F	Fuel filter water separator	7-34
	Fransmission oil filter switch	
H	Hydraulic oil filter switch	7-38
⊏iro	at 40 to 50 hours	
	st 10 to 50 hours	7 11
	Differential and planetary oil	
	Wheel bolt torque	
V	Veight bolt torque	7-41
Eve	ery 10 hours or daily	
	Engine oil level	7-42
	Fransmission oil level	
	Engine coolant level	
	Engine auxiliary fuel filter	
	Air reservoir	
	Rear hitch and front axle	
Evo	ory 50 bours or wooldy	
	ery 50 hours or weekly	<b>,</b> , ,
E	Engine fuel pre-filter	7-48
Fve	ery 100 hours	
	Front hitch	7 40
	Front PTO drive shaft	
_	000 h	
	ery 300 hours	
	Battery water level (Note E)	
	Engine air intake hoses	
	Engine coolant level - deaeration tank	
	Wheel bolt torque	
V	Veight bolt torque	7-57


Front axle (Note A)	
Rear hitch (Note A)	
Fuel tank	7-69
Differential and planetary oil level (Note B)	
Transmission oil pressure	
Front PTO oil level	7-73
Every 400 hours	
Cab air filter	7-74
Every 600 hours	
Engine oil and filter	7_77
Engine coolant antifreeze protection	
Engine coolant drifficeze protection	
Engine primary fuel filter	
Engine fuel pre-filter	
Fuel system bleeding	
Changeable PTO internal splines	
DEF/AdBlue® in-line filter	
Front PTO oil and filter	
Every 1000 hours or annually Pneumatic brake system dryer	7-94
Every 1200 hours or annually	
Differential and planetary oil	7-94
Engine air filters	
Engine air precleaner	7-103
Every 1500 hours	
Transmission oil	7-105
Transmission oil filter	
Regulated transmission filter	
Engine crankcase filter	7-109
Every 1800 hours	
DEF/AdBlue® supply module filter	7-113
Every 2000 hours	
Engine coolant	7-114
Engine valve adjustment (Note C)	
Every 3000 hours	
Engine vibration damper (Note C)	7 117
Emergency steering system	
	<i>1</i> = 1 10

Every 5000 hours	
Fuel injector nozzles (Note C)	7-119
A a wa ay ina d	
As required	7.400
Vehicle fire prevention	
Engine primary air filter	
Grille screen and radiator area	
Transmission clutch and accumulator	7-126
Tire pressure	
Fan belt	7-127
Cab suspension, if equipped	7-130
Remote valve collection bottle	
Engine auxiliary fuel filter	
Cab fabric and carpet	
Seat belt	7-134
STORAGE	
Tractor storage	7-135
Removal from storage	
ELECTRICAL SYSTEM	
Radio or audio system	7-137
Battery removal and installation	7-138
Auxiliary battery connections	7-140
Head light - Replace	7-141
Grille work light	7-145
Fender tail light and warning light	7-147
Roof warning light	7-149
Roof work light	7-151
Belt line, roof or fender work light	7-153
High intensity work light	7-155
Wide transport marker light	7-157
Rotating beacon light	7-158
Interior light - Replace	7-159
TROUBLESHOOTING	
ALARM(S)	
Display warnings overview	8-1
Display warnings - Level 1	
Display warnings - Level 2	
Display warnings - Level 3	
Display warnings - Level 4	

	SYMPTOM(S)  Engine symptoms 8-12  Transmission symptoms 8-14  Hydraulic symptoms 8-15  Hitch symptoms 8-16  Brake symptoms 8-17  Cab environment symptoms 8-18  Electrical power system symptoms 8-19	4 5 6 7 8
9	SPECIFICATIONS  Engine specifications 9-7  Power train specifications 9-7  Operating speeds 9-8  Vehicle dimensions and shipping weight 9-16  Maximum operating weight 9-16	2 5 3
10	ACCESSORIES Front wheel fenders - Dynamic fenders	8 9 1 2
11	FORMS AND DECLARATIONS  Delivery report - owner copy 11-2  Delivery report - dealer copy 11-2  First service - owner copy 11-6  First service - dealer copy 11-6	2 4

## 1 - GENERAL INFORMATION

## Your tractor

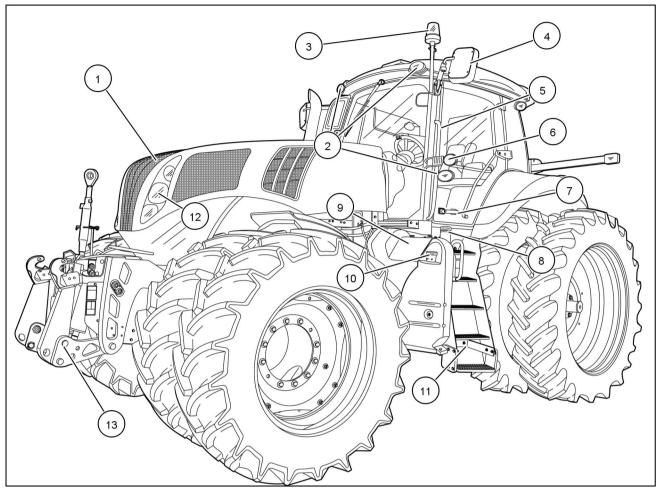

RCPH11CCH027GAA

### **Emissions warranty**

#### U.S. EPA and California Emissions Control Warranty Statement

NEW HOLLAND AGRICULTURE warrants to the ultimate purchaser and each subsequent purchaser that the engine is designed, built and equipped so as to conform with U.S. Environmental Protection Agency regulations applicable at the time of manufacture and that it is free from defects in workmanship or material which would cause it not to meet these regulations for a period of:

- 2 years or 1,500 hours of operation, whichever occurs first, for engines less than 19kW/25HP
- 5 years or 3,000 hours of operation, whichever occurs first, for engines greater than or equal to 19kW/25HP

NOTE: This warranty applies to all units operated in the United States or Canada.

#### Coverage

The model year, class of diesel engine, and emission application determination for your engine are identified on the Emission Control Information Label. This label is affixed to one of the following areas of the engine: the top of engine's rocker arm cover, the right-hand side of the oil pan, and the right-hand side of the engine front gear cover. The warranty period begins on the date the new equipment is sold to the first retail purchaser. The presence of the emission control label is the indication that the engine conforms to the applicable standards. Any emission control system parts which are proven defective during normal use will be repaired or replaced during the warranty period.

The engine owner has responsibility to perform all the required maintenance listed in the Owner's Manual. NEW HOLLAND AGRICULTURE will not deny an emission warranty claim solely because no record of maintenance exists; however, a claim may be denied if failure to perform maintenance resulted in the failure of a warranted part.

It is recommended that replacement parts used for maintenance or repairs be NEW HOLLAND AGRICULTURE Service Parts to maintain the quality originally designed into your emission certified engine. The use of non- NEW HOLLAND AGRICULTURE parts does not invalidate the warranty on other components unless the use of such parts causes damage to warranted parts.

The manufacturer is liable for damages to other engine components caused by the failure of any warranted emission control system part. NEW HOLLAND AGRICULTURE is not responsible for failures resulting from improper repair or the use of parts that are not genuine NEW HOLLAND AGRICULTURE or NEW HOLLAND AGRICULTURE approved parts.

#### Component coverage

New engines certified for sale and registered will have the following items covered by the emission warranty, depending on the emission level of the engine, if the items were first installed on the new engine as original equipment:

Fuel injection system

- Fuel injection pump
- Fuel injectors
- Fuel injection lines

Air induction system

- Intake manifold
- Turbocharger system (includes exhaust manifold)
- Charge air cooler

Positive crankcase ventilation system (if applicable)

- PVC valve
- Oil fill cap

Exhaust after treatment Devices (if applicable)

- Catalytic converter (DOC)
- Diesel particulate filter (DPF)
- Selective catalytic reduction (SCR)
- Diesel Exhaust Fluid (DEF) tank and dispensing systems

Exhaust Gas Recirculation Systems (EGR)

- EGR valve assembly
- EGR cooler

Cold Start Enrichment Systems

Electronic Control Units, Sensors, Solenoids, and Wiring harnesses used in above systems

#### **Emissions warranty does not cover**

- Repairs arising from storage deterioration, failure to maintain the equipment, negligence, alteration, improper
  use of the equipment, collision or other accident, vandalism, or other casualty, or operation beyond rated capacity or specification.
- Repairs arising from abuse or neglect, including but not limited to: operation without adequate coolant or lubricants, adjustments to the fuel system outside equipment specifications, over-speeding, improper storage, starting, warm-up, or shutdown practices, incorrect fuel or contaminated fuel, oil or other fluids.
- Normal maintenance services, such as engine tune-ups, engine fuel system cleaning, checks, adjustments, shimming, etc.
- Items replaced due to customer demand.
- Labor charges performed by anyone except a dealer authorized by contract to repair the equipment, unless they
  qualify under special provisions (i.e. outside labor).
- Any and all travel costs for items such as towing, service calls, or transporting a unit to and from the place where
  the warranty service is performed.
- Normal maintenance costs, including but not limited to: lubricants, coolants, fluids, fuel, filters, and associated labor. Lubricants, filters, and coolants may qualify for warranty reimbursement if they require replacement as a DIRECT RESULT of a defect in material or workmanship.
- Claims involving the inspection or reconditioning of units after storage or prior use.
- Repairs arising from service performed by agents not approved by NEW HOLLAND AGRICULTURE.
- Repairs arising from any unauthorized modification to the product or the use of non- NEW HOLLAND AGRI-CULTURE parts, implements or attachments.
- Removal, replacement, or installation of non- NEW HOLLAND AGRICULTURE optional equipment, attachments or components.
- Premiums charged for overtime labor costs or out of shop expenses.
- Economic loss including lost profits, crop loss, equipment rental, or other expense.
- Unauthorized modification or updating machines without a warrantable failure.
- Any and all costs of dealer shop supplies incurred with repairs, including but not limited to: solvents, cleaners, anti-seize lubricants, loctite, sealant, adhesive, oil-dry, shop towels, etc.
- Failure of the machine, its implements or attachments caused by improper field application or loading.
- Any and all costs for coolant, fuel, or lube (oil) analysis including supplies and lab recommendations.
- Cost associated with cleaning of machine in preparation for servicing.

#### Note to the Owner

This manual contains important information about the safe operation, adjustment and routine maintenance of your T8. series tractor. The manual is divided into eleven chapters as outlined in the table of contents. Refer to the index at the end of this manual for locating specific items about your tractor.

Do NOT operate or permit anyone to operate or service this machine until you or the other persons have read this manual. Use only trained operators who have demonstrated the ability to operate and service this machine correctly and safely.


This Operator's Manual is to be stored in the manual compartment behind the operator's seat in the vehicle. Make

sure this manual is in good condition. Contact your dealer to obtain additional manuals.

Your NEW HOLLAND AGRICULTURE dealer will instruct you in the general operation of your new equipment. Your dealer's staff of factory-trained service technicians will be glad to answer any questions that may arise regarding the operation of your machine. They will also provide any after-sales service you may need, and genuine NEW HOLLAND AGRICULTURE parts, your guarantee of quality and match.

New Holland Top Service is also available. Call 1-866-NEWHLND (1-866-639-4563) or email na.topservice@cnh.com.

## Manual storage

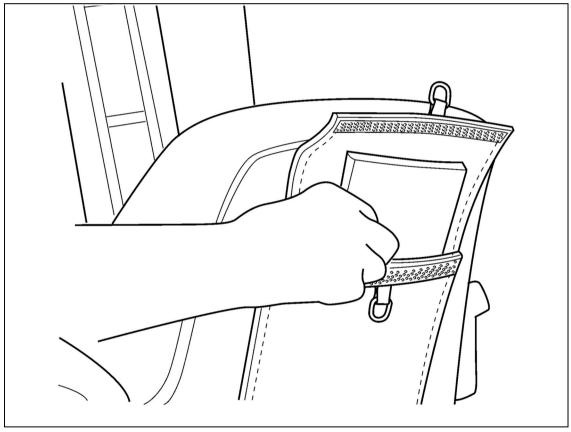

RCPH08CCH001FAB

Keep the Operator's Manual in the storage compartment provided on your tractor. The Operator's Manual must be available for use by all operators.

Thank you so much for reading. Please click the "Buy Now!" button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email: ebooklibonline@outlook.com