

1275 FARM WAGON



JOHN DEERE


OPERATORS MANUAL

1275
FARM WAGON

OMW21488 A0 English

WELLAND WORKS
OMW21488 A0

LITHO IN THE U.S.A.
ENGLISH





Introduction




This safety alert symbol identifies important safety messages in this manual. When you see this symbol be alert to the possibility of personal injury and carefully read the message that follows.

“Right” and “left-hand” sides are determined by facing the direction of forward travel.

The warranty appears on your copy of the purchase order which you should have received from your dealer.

Record your wagon serial number in the space provided on page 25. Your dealer needs this information to give you prompt efficient service.

This operator's manual contains SI metric equivalents which follow immediately after the U.S. customary units of measure.

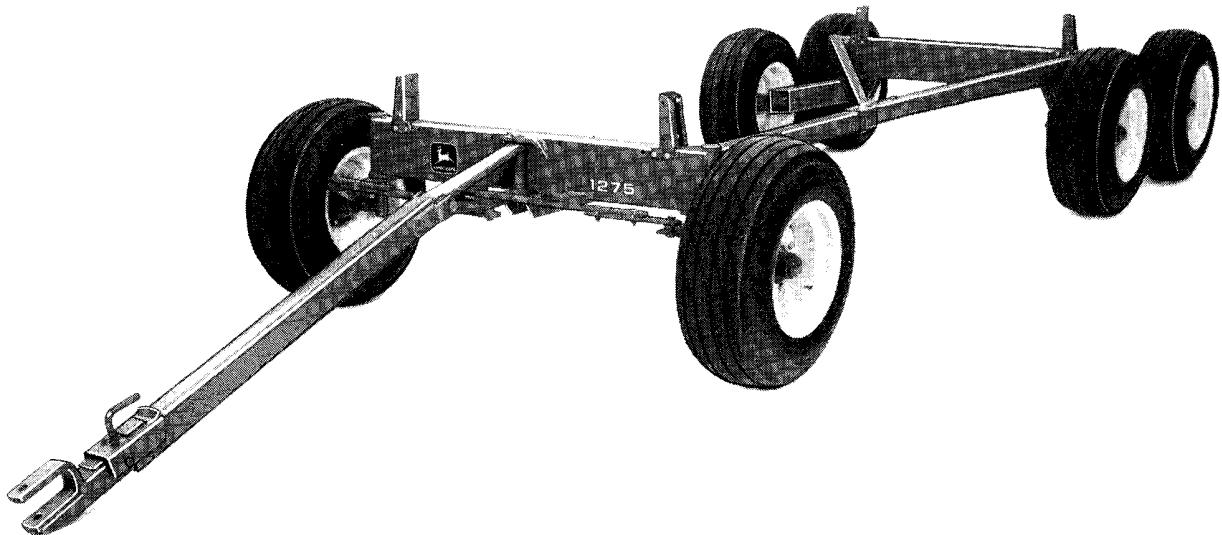


W79288F1

1275 FARM WAGON (13201-)


USE A SAFETY CHAIN

A safety chain will help control drawn equipment (B) should it accidentally separate from the drawbar (A) while transporting. Using the appropriate adapter parts, attach the chain to the tractor drawbar support or other specified anchor location. Provide only enough slack in the chain to permit turning. See your John Deere dealer for a chain with a strength rating greater than the gross weight of the towed machine.

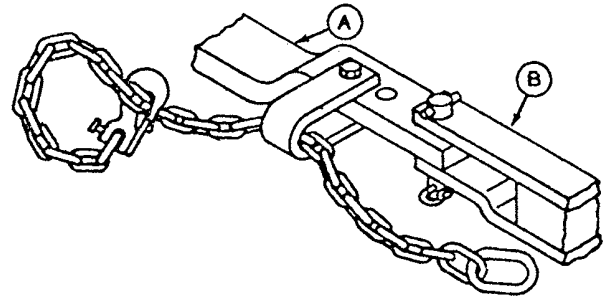


INSTALL SAFETY CHAIN

1. Attach connecting link (A) to inner hitch pole using one 3/4 x 5-1/4 in. cap screw, spacer, flat washer, and locknut (B).
2. Tighten to 407 Nm (300 lb-ft) torque.

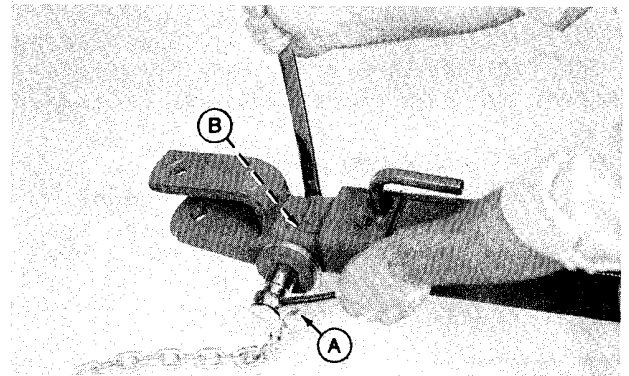


ATTACHING SAFETY CHAIN

1. Route chain through intermediate support (A) and tractor (B).
Note: Attach chain to tractor according to instructions provided in your tractor Operator's Manual.
IMPORTANT: Adjust chain length to remove all slack except what is required for turns.
2. Secure chain with hook (C) and engage lock.

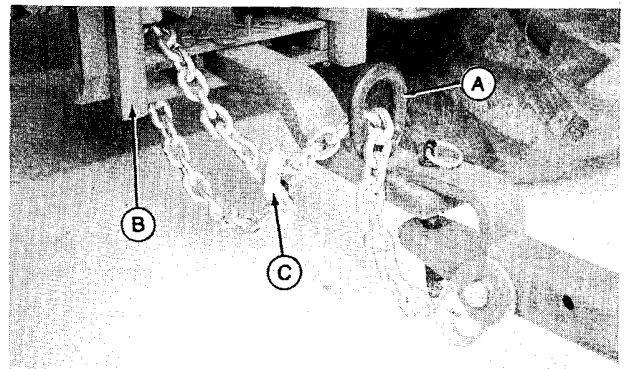


Note: Location of intermediate support (A) is dependent on whether PTO driven equipment is mounted on wagon gear. If PTO driven equipment is mounted, support should be on bottom of drawbar.

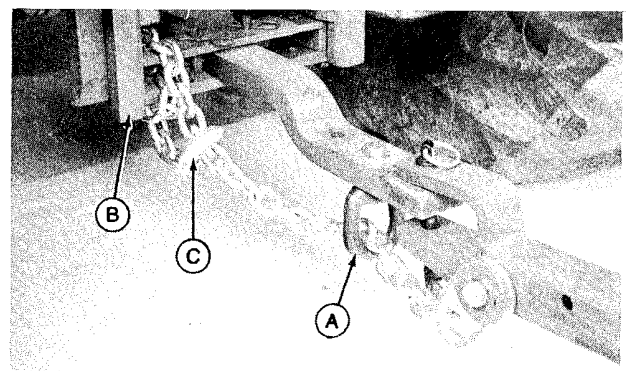

TRANSPORT SAFELY




CAUTION: A safety chain will help control towed equipment (B) should it accidentally separate from the drawbar (A) while transporting. Using the appropriate adapter parts, attach the chain to the tractor drawbar support or other specified anchor location. Provide only enough slack in the chain to permit turning. See your John Deere dealer for a chain with a strength rating greater than the gross weight of the towed machine.

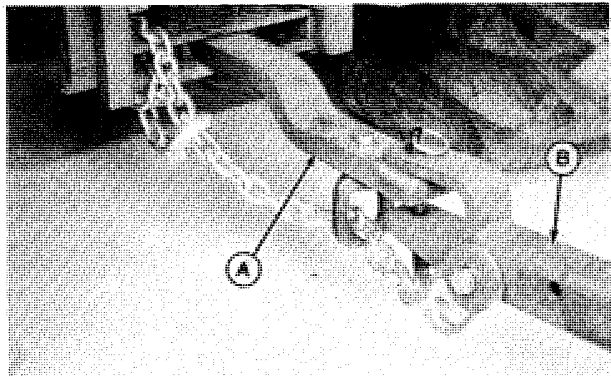

MULTIPLE HITCHING

IMPORTANT: Do not tow multiple wagons where the combined gross weight of wagons exceeds maximum rated capacity of leading wagon.

The 1275 Farm Wagon is rated for 24,000 lbs (10896 kg) maximum gross weight at 5 mph (8 km/h). Refer to chart for ratings and towing speeds.

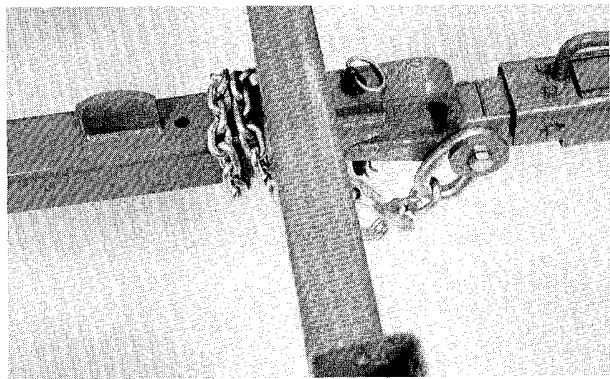

TOW SAFELY



CAUTION: To avoid possible loss of control resulting in personal injury:

Do not tow loads that exceed twice the weight of the tractor.

Do not exceed 10 mph (16 km/h) when the gross towed load weighs more than the tractor.

If the gross towed load weighs less than the tractor, the maximum towing speed is 20 mph (32 km/h).

1275 WAGON GEAR-MAXIMUM LOAD/TOWING SPEEDS

Road Speed	Max. Towed Gross Load*	Loaded**		Wagon Tire Specifications	Minimum Tractor Wt
		Wheat	Ear Corn		
5 mph (8 km/h)	24000 lb (10896 kg)	350 bu (12.25 m ³)	300 bu (10.5 m ³)	11L-15 x 12 PR @60 psi (413.7 kPa)	12000 lb (5440 kg)
	19600 lb (8898 kg)	268 bu (9.90 m ³)	230 bu (8.05 m ³)	7.50-16 x 10 PR @60 psi (413.7 kPa)	9800 lb (4449 kg)
10 mph (16 km/h)	23000 lb (10442 kg)	330 bu (11.55 m ³)	280 bu (9.8 m ³)	11L-15 x 12 PR @60 psi (413.7 kPa)	11500 lb (5220 kg)
	18500 lb (8399 kg)	250 bu (8.75 m ³)	220 bu (7.7 m ³)	7.50-16 x 10 PR @60 psi (413.7 kPa)	9250 lb (4200 kg)
20 mph (32 km/h)	20700 lb (9398 kg)	290 bu (10.15 m ³)	250 bu (8.75 m ³)	11L-15 x 12 PR @56 psi (386.1 kPa)	20700 lb (9400 kg)
	16600 lb (7536 kg)	220 bu (7.7 m ³)	190 bu (6.65 m ³)	7.5-16 x 10 PR @56 psi (386.1 kPa)	16600 lb (7536 kg)

* Maximum Towed Gross Load - Indicates the combined weight of the wagon bed or forage box, 1275 wagon gear and tires, weight of material being hauled and any additional loads being towed.

**Load is based on one 1275 wagon gear and wagon bed or grain box, weighing no more than 2500 lb (1135 kg) consisting of wheat @60 lb/bu (778 kg/m³) and ear corn @70 lb/bu (908 kg/m³)



Contents

	Page		Page
SAFETY.....	2-4	ATTACHMENTS.....	14
PREPARING THE TRACTOR.....	5-6	Bolster Stakes.....	14
Drawbar.....	5	Solid Front Bolster.....	14
Warning Lights.....	5	Rocking Rear Bolster.....	14
Ballast.....	6	LUBRICATION.....	15-16
Tire Inflation.....	6	SERVICE.....	17-19
Brakes.....	6	Wheel Bearings.....	17
ATTACHING AND DETACHING.....	7-8	Wheel Toe-In.....	18
TRANSPORTING.....	9-10	Tires.....	19
Load Size.....	9	Hardware.....	19
Tire Pressure.....	9	ASSEMBLY.....	20-23
Brakes.....	9	Wheels.....	20-21
Trailing.....	10	Reach.....	22
OPERATION.....	11-13	Hitch Pole.....	23
Load Capacity.....	11	SPECIFICATIONS.....	24
Chassis.....	12	SERIAL NUMBER.....	25
Wheelbase.....	12		
Hitch Pole.....	12-13		
Tires.....	13		
Wheel Bolts.....	13		

Thank you so much for reading.
Please click the “Buy Now!”
button below to download the
complete manual.



After you pay.

You can download the most
perfect and complete manual in
the world immediately.

Our support email:

ebooklibonline@outlook.com