

# 1075 FARM WAGON



JOHN DEERE

## OPERATORS MANUAL

1075  
FARM WAGON

OMW28567 A2 English

**OMW28567 A2**

LITHO IN THE U.S.A.  
ENGLISH





# Introduction

---




This safety alert symbol identifies important safety messages in this manual. When you see this symbol be alert to the possibility of personal injury and carefully read the message that follows.

“Right” and “left-hand” sides are determined by facing the direction of forward travel.

The warranty appears on your copy of the purchase order which you should have received from your dealer.

Record your wagon serial number in the space provided on page 26. Your dealer needs this information to give you prompt efficient service.


This operator's manual contains SI metric equivalents which follow immediately after the U.S. customary units of measure.

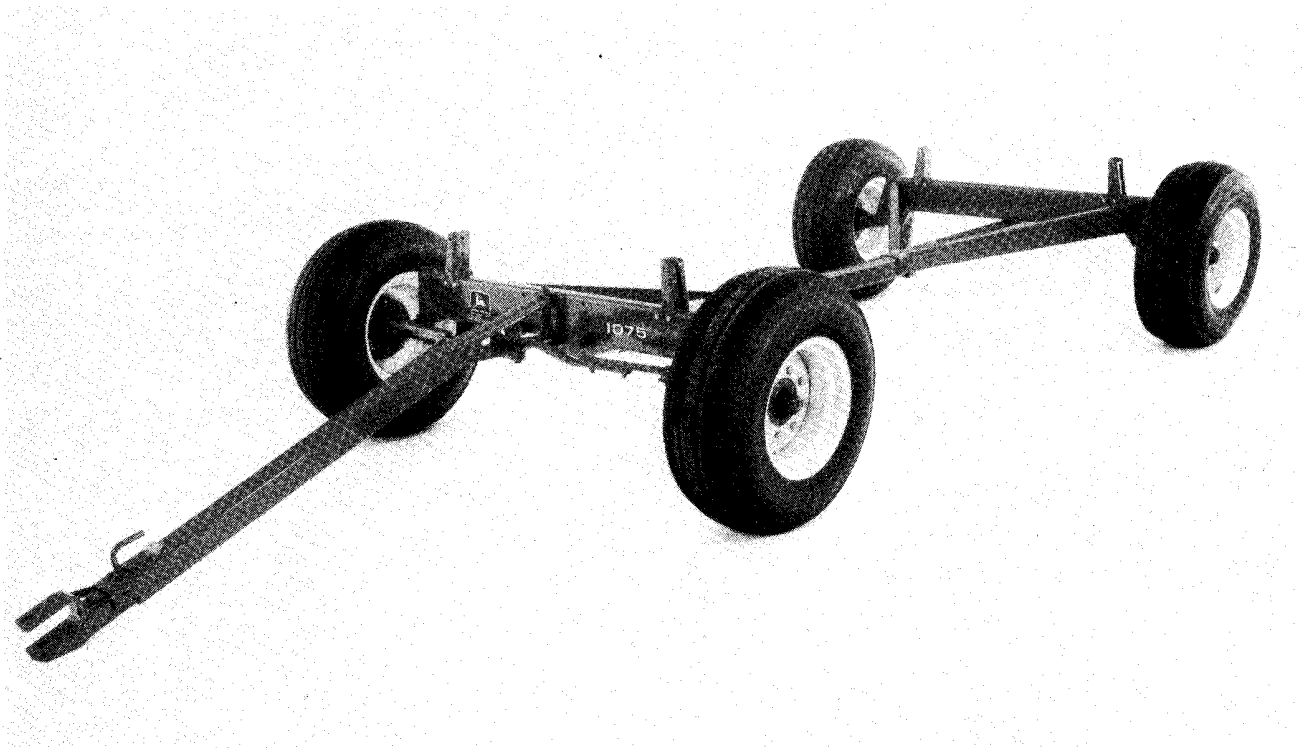

# 1075 FARM WAGON


## USE A SAFETY CHAIN

A safety chain will help control drawn equipment (B) should it accidentally separate from the drawbar (A) while transporting. Using the appropriate adapter parts, attach the chain to the tractor drawbar support or other specified anchor location. Provide only enough slack in the chain to permit turning. See your John Deere dealer for a chain with a strength rating greater than the gross weight of the towed machine.

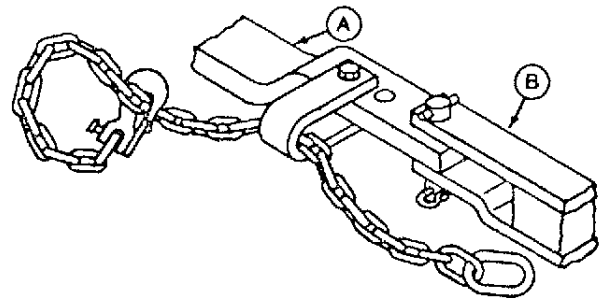


## INSTALL SAFETY CHAIN

1. Attach connecting link (A) to inner hitch pole using one 3/4 x 5-1/4 in. cap screw, spacer, flat washer, and locknut (B).
2. Tighten to 407 Nm (300 lb-ft) torque.

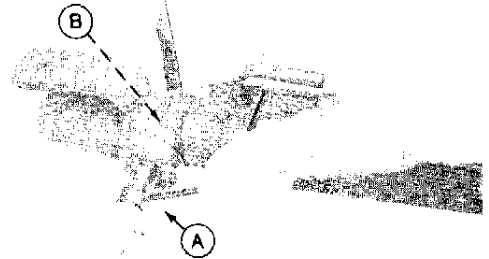


## ATTACHING SAFETY CHAIN

1. Route chain through intermediate support (A) and tractor (B).  
Note: Attach chain to tractor according to instructions provided in your tractor Operator's Manual.  
**IMPORTANT:** Adjust chain length to remove all slack except what is required for turns.
2. Secure chain with hook (C) and engage Lock.

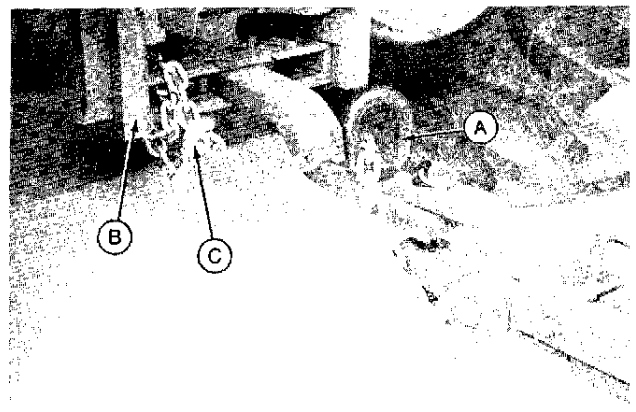


Note: Location of intermediate support (A) is dependent on whether PTO driven equipment is mounted on wagon gear. If PTO driven equipment is mounted, support should be on bottom of drawbar.

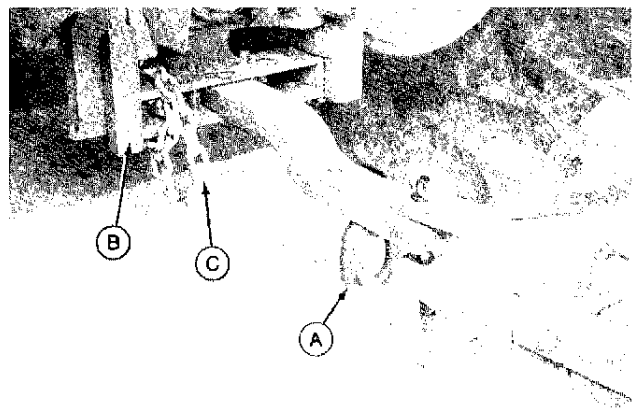

## TRANSPORT SAFELY




**CAUTION:** A safety chain will help control towed equipment (B) should it accidentally separate from the drawbar (A) while transporting. Using the appropriate adapter parts, attach the chain to the tractor drawbar support or other specified anchor location. Provide only enough slack in the chain to permit turning. See your John Deere dealer for a chain with a strength rating greater than the gross weight of the towed machine.

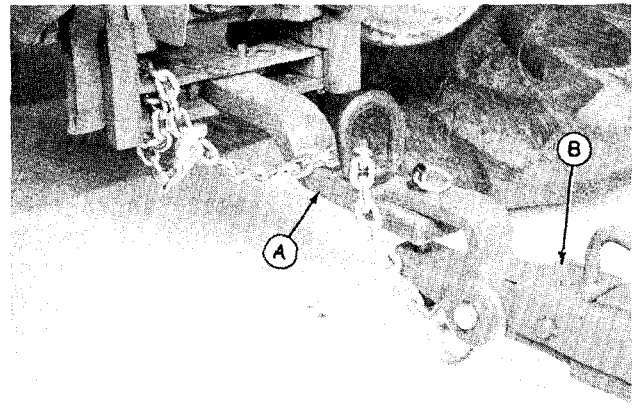

## MULTIPLE HITCHING

**IMPORTANT:** Do not tow multiple wagons where the combined gross weight of wagons exceeds maximum rated capacity of leading wagon.

The 1075 Farm Wagon is rated for 20,000 lbs (9000 kg) maximum gross weight at 5 mph (8 km/h). Refer to chart for ratings and towing speeds.

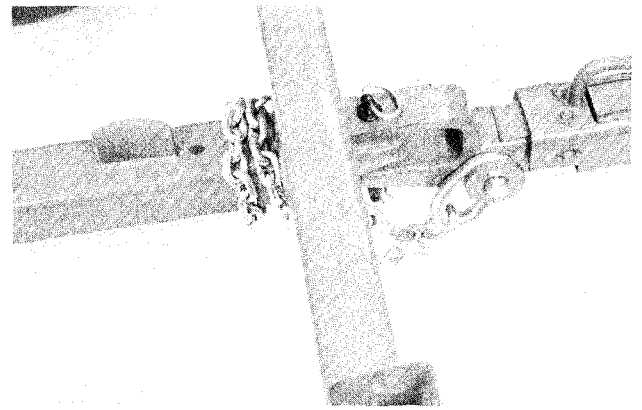

## TOW SAFELY



**CAUTION:** To avoid possible loss of control resulting in personal injury:

Do not tow loads that exceed twice the weight of the tractor.

Do not exceed 10 mph (16 km/h) when the gross towed load weighs more than the tractor.

If the gross towed load weighs less than the tractor, the maximum towing speed is 20 mph (32 km/h).

1075 WAGON GEAR-MAXIMUM LOAD/TOWING SPEEDS

Road Speed	Max. Towed Gross Load*	Loaded**		Wagon Tire Specifications	Minimum Tractor Wt
		Wheat	Ear Corn		
5 mph (8 km/h)	20000 lb (9000 kg)	290 bu (10.2 m <sup>3</sup> )	250 bu (8.8 m <sup>3</sup> )	12.5L-16 x 12 PR @56 psi (386.1 kPa)	10000 lb (4500 kg)
10 mph (16 km/h)	19000 lb (8550 kg)	275 bu (9.6 m <sup>3</sup> )	235 bu (8.2 m <sup>3</sup> )	12.5L-16 x 12 PR @56 psi (386.1 kPa)	9500 lb (4275 kg)
20 mph (32 km/h)	17000 lb (7650 kg)	240 bu (8.4 m <sup>3</sup> )	210 bu (7.4 m <sup>3</sup> )	12.5L-16 x 12 PR @52 psi (358.5 kPa)	17000 lb (7650 kg)

\* Maximum Towed Gross Load - Indicates the combined weight of the wagon bed or forage box, 1075 wagon gear and tires, weight of material being hauled and any additional loads being towed.

\*\*Load is based on one 1075 wagon gear and wagon bed or grain box, weighing no more than 2500 lb (1135 kg) consisting of wheat @60 lb/bu (778 kg/m<sup>3</sup>) and ear corn @70 lb/bu (908 kg/m<sup>3</sup>)

## TO THE DEALER

After the wagon gear has been assembled, inspect it thoroughly to be sure it is functioning properly before delivering it to the customer. The following check list is a reminder of points to check. Check off each item as it is found satisfactory or after proper adjustment has been made.

The John Deere Delivery Receipt, when properly filled out and signed by the dealer and customer, verifies that the predelivery and delivery services were satisfactorily performed. When delivering this machine, give the customer a copy of the delivery receipt and the operator's manual. Explain their purpose.

Be certain to retain your copy of the packing list for shipping bundle information.

### PREDELIVERY CHECK LIST

The following check list is a reminder of points to inspect. Check off each item as it is found satisfactory or after proper adjustment is made.

- Check all bearing grease seals for leakage.
- Inflate tires to pressure specified on page 11.
- Lubricate all lubrication points. See pages 15 and 16.

- Check to be sure that all bolts are tight. See torque chart on page 20.
- Paint all unpainted bolts and nuts and any parts scratched in shipment.
- Check all wheel hub bolts to be sure they are tight.
- Watch for any signs of faulty operation or unusual sounds.
- This wagon to the best of my knowledge, is ready for delivery to the customer.

---

*(Date Set-Up)*

---

*(Signature of Set-Up Person)*

Thank you so much for reading.  
Please click the “Buy Now!”  
button below to download the  
complete manual.



After you pay.

You can download the most  
perfect and complete manual in  
the world immediately.

Our support email:

[ebooklibonline@outlook.com](mailto:ebooklibonline@outlook.com)